MAX9 Neutral Bar 8 Holes
MX9ENB08

Installation Instruction



PLEASE NOTE

- The installation, maintenance and eventual replacement of this electrical equipment must only be carried out by a licensed electrician.
- This electrical equipment must not be repaired.
- All applicable local, regional and national regulations must be complied with during the installation, use, maintenance and replacement of this device.
- This product should not be installed if, when unpacking it, you observe that it is damaged.
- Clipsal cannot be held responsible in the event of noncompliance with the instructions in this document and in the documents to which it refers.
- The service instruction must be observed throughout the lifetime of this product.
- This product is intended for indoor application.


⚠⚠ DANGER


HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Turn off all power supplying this product before working on it.
- Use a voltage tester with a suitable rated voltage in order to check that all active conductors aren't energized.
- Carefully inspect the work area to check that no tools or objects could have been left inside the equipment.

Failure to follow these instructions will result in death or serious injury.

1 Unboxing

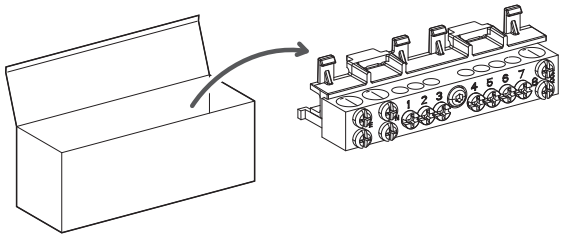



Neutral Terminal Bar Screws			T
M4.5	6.5 mm	PZ2	2 N.m
M5	6.5 mm	PZ2	2 N.m


Switchboard commercial references	Can additional neutral bar be added MX9ENB08	No. of neutral bars without LVSXK1	Can additional neutral support kit LVSXK1 be added	No. of neutral bars with LVSXK1	Total neutral bars
MX9SB113S	No	-	Yes	2	2
MX9SB213S	Yes	1	Yes	2	3
MX9SB313S	No	-	Yes	2	2
MX9SB413S	No	-	Yes	2	2
MX9SB118S	Yes	2	Yes	3	5
MX9SB218S	Yes	1	Yes	3	4
MX9SB318S	Yes	1	Yes	3	4
MX9SB418S	No	-	Yes	3	3
MX9SB113F	No	-	Yes	2	2
MX9SB213F	Yes	1	No	-	1
MX9SB313F	No	-	No	-	-
MX9SB413F	No	-	No	-	-
MX9SB118F	Yes	2	No	-	2
MX9SB218F	Yes	1	No	-	1
MX9SB318F	Yes	1	No	-	1
MX9SB418F	No	-	No	-	-
MX9SBWP212S	Yes	1	No	-	1
MX9SBWP312S	No	-	No	-	-
MX9SB224S	Yes	2	No	-	2
MX9SB224F	Yes	2	No	-	2

Life Is On


CLIPSAL by Schneider Electric


2 Neutral Bar Installation and Wiring

13 / 18 M

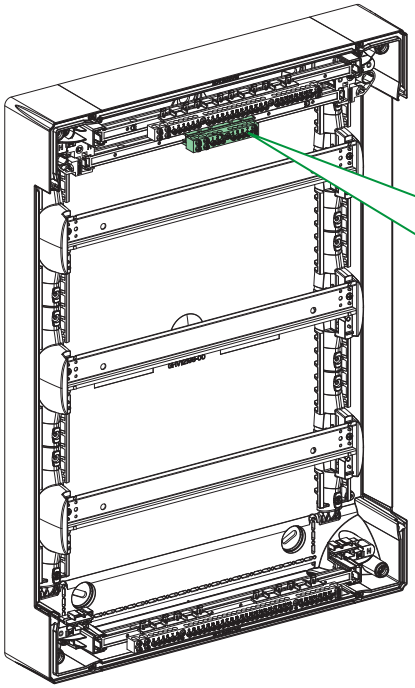


Installation

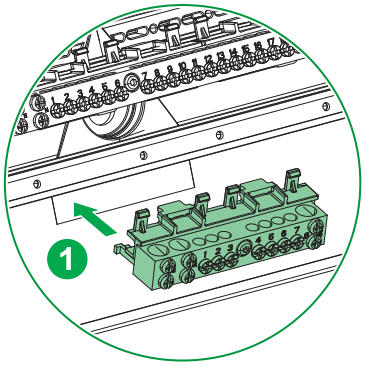





Removal

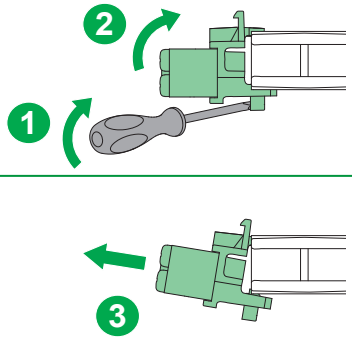


Wiring

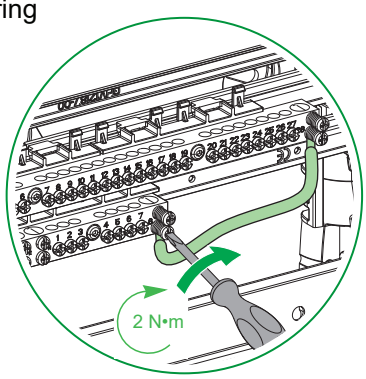


24 M

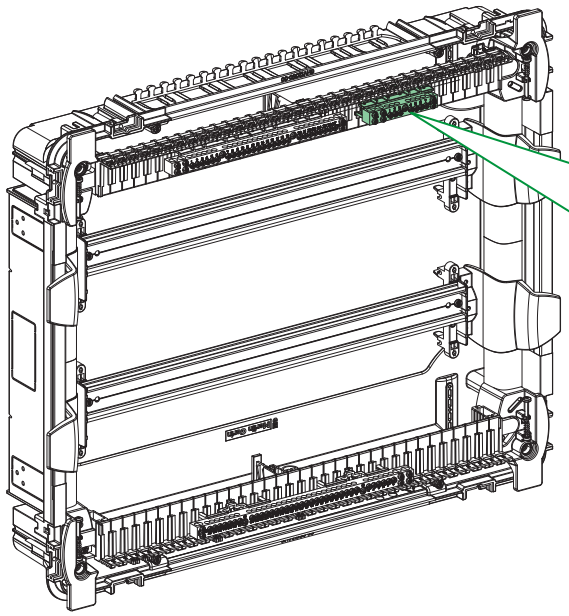


Installation

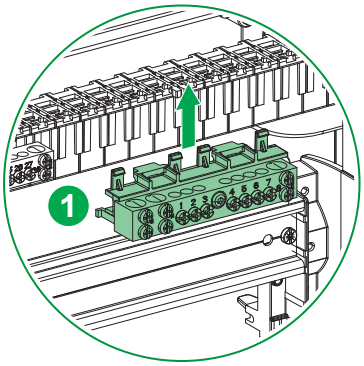


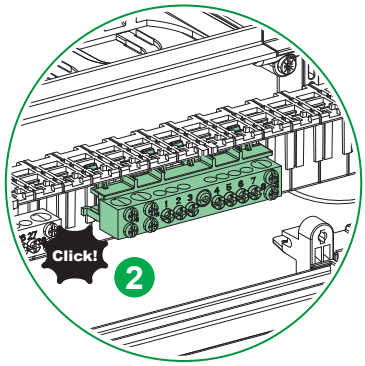

Removal

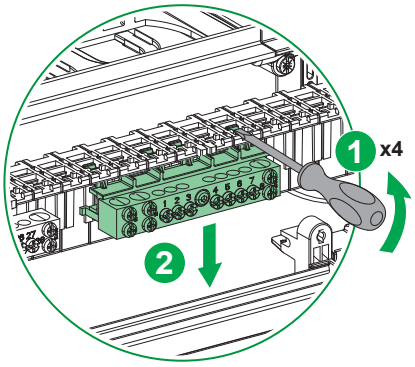

Wiring

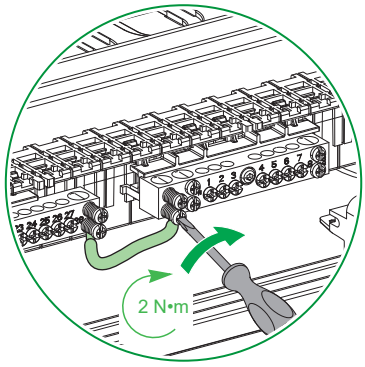

Clipsal by Schneider Electric (Australia) Pty Limited
33-37 Port Wakefield Road
Gepps Cross
South Australia 5094

Customer Care Centre
Tel: 13 73 28
Email: customercare.au@se.com
www.clipsal.com

JPT2559902-00

© 2026 Clipsal Australia Pty Ltd - All rights reserved.
The identified trademarks and copyrights are the property of Clipsal Australia Pty Ltd unless otherwise noted.