iSPN H/N Vigi - RCBO - A9D●●6●●T

en



Schneider Electric

PLEASE NOTE

- The installation, maintenance and eventual replacement of this device must only be carried out by a qualified electrician.
- All applicable local, regional and national regulations must be complied with during the installation,use, maintenance and replacement of this device.
- This device should not be installed if, when unpacking it, you observe that it is damaged.
- Schneider Electric cannot be held responsible in the event of noncompliance with the instructions in this document and in the documents to which it refers.
- The service instruction must be observed throughout the life time of this device.
- This device must not be repaired.

⚠⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Turn off all power supplying this device before working on it.
- Use a voltage tester with a suitable rated voltage in order to check that all active conductors aren't energized.

Failure to follow these instructions will result in death or serious injury.


2 Connection


NOTICE

INOPERABLE EQUIPMENT

- Do not bind the neutral cable for installation.
- Install the neutral cable straight between the iSPN H/N Vigi-RCBO and the main neutral terminal block.

Failure to follow these instructions can result in equipment damage.



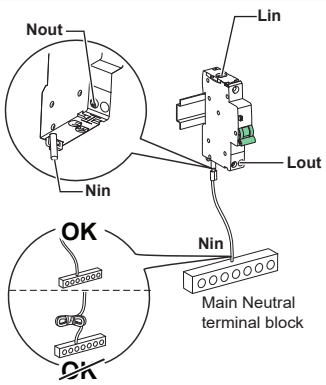


1 Installation


⚠⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

Install this product in accordance with National Wiring regulation.

Failure to follow these instructions will result in death or serious injury.

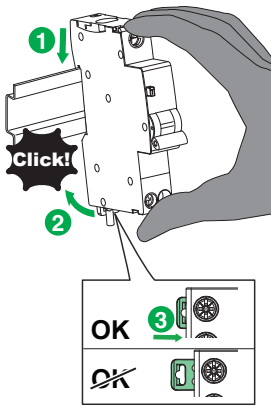

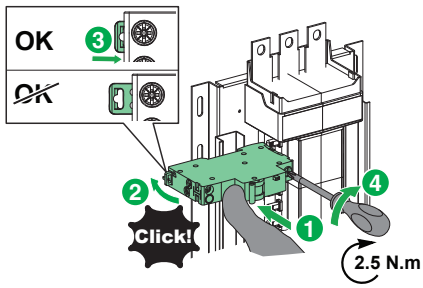

Note: As per Clause 9.12 of AS/NZS61009.1 the grid distance clearance from the arc vent must be atleast 45 mm.

	Stripping length	Rigid cable	Flexible cable	Torque	Screw size
				C	
Lin	≤ 14 mm	≤ 16 mm²	≤ 10 mm²	2.5 N.m	PZ2
Lout	≤ 11 mm	≤ 16 mm²	≤ 10 mm²	1.2 N.m	PH2
Nout	≤ 11 mm	≤ 16 mm²	≤ 10 mm²	1.2 N.m	PH2

3 Testing


NOTICE

HAZARD OF IMPROPER OPERATION

Do not use Test Button to switch OFF RCBO.

Failure to follow these instructions can result in equipment damage.

Note: Test the device at regular intervals by pressing the Test button (marked T), following the intervals defined in your local regulations or monthly.

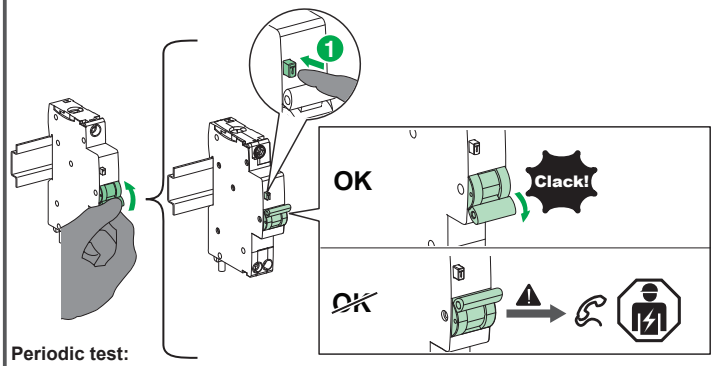


Periodic test:
In the absence of any regulation, Schneider Electric recommends the test should be carried out once a month.


Megger test:
iSPN H/N Vigi-RCBO must be disconnected before any dielectric tests are carried out.

4 Accessories

A9A26977
Padlock device
x1

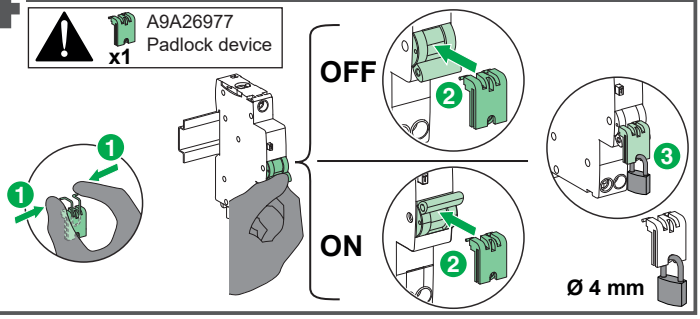

5 More information...

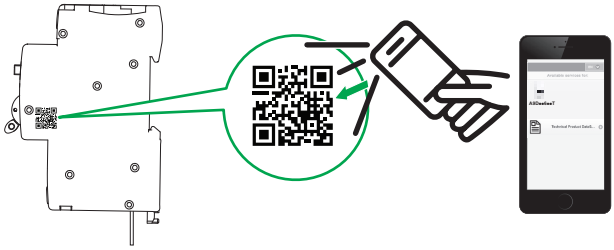

Note: Scan the QR code on product for more information.

Schneider Electric Industries SAS
35 rue Joseph Monier
92500 Rueil-Malmaison
France
www.se.com

This product must be installed, connected and used in compliance with prevailing standards and/or installation regulations.
As standards, specifications and designs change from time to time, always ask for confirmation of the information given in this publication.

D4019623-00
01-2026

© 2026 Schneider Electric - All rights reserved.