

Product End-of-Life Instructions


Cables/harnesses (Halogen models)

Product Range

Cables/harnesses (Halogen models)

Marketing Model

TSXCANCB300

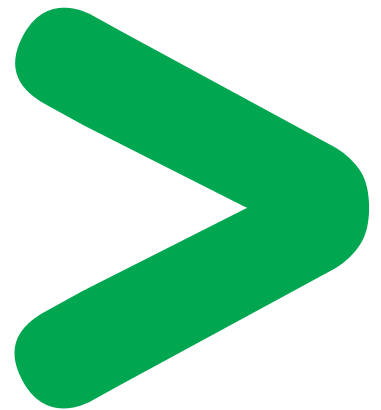

Size in mm:

H x L: 7 x 1000

Weight in kg (or g):

Between 50 and 150 g/m




Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy:

Reuse ⇒ **Separation for special treatment** ⇒ **Other dismantling** ⇒ **Shredding**

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

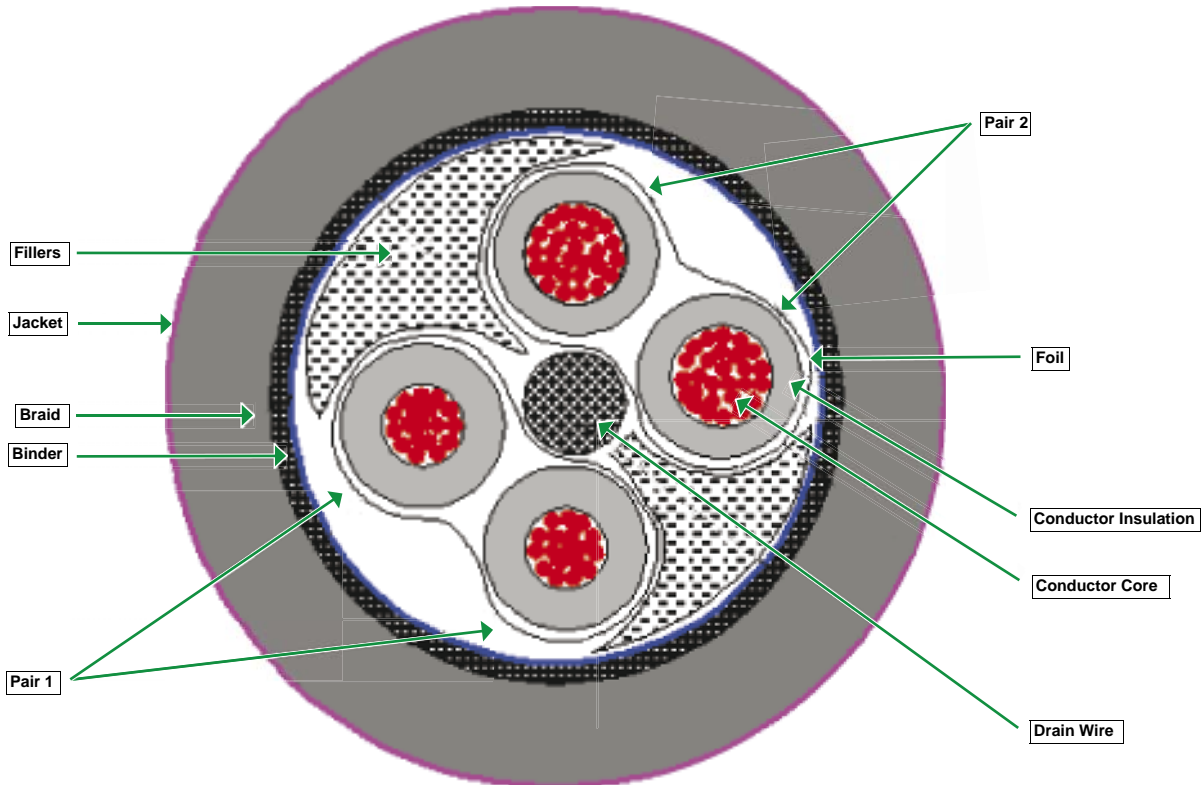

Recommendation	Number on drawing	Components	Weight (g)	Comment
Special treatment	–	Cables / Harnesses	70	PVC based
Other dismantling	–	Copper	35	(Valorisation)

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V0.

Publication: Schneider Electric