


Product End of Life Instructions

Medilec RESIDUAL CURRENT DEVICE WITH TWIN SOCKET OUTLET AND ANTIBACTERIAL SURFACE



 **End of Life Instructions**

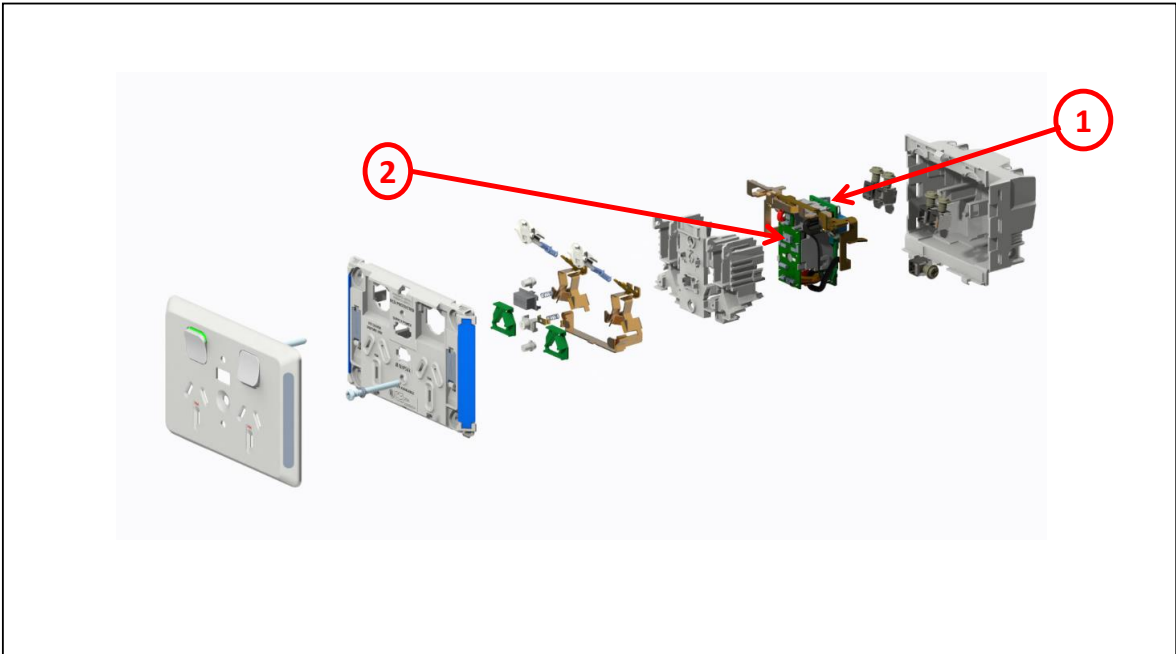

| Recommendation | Number on drawing | Component / Material | Weight (g) | Comment |
|------------------|-------------------|----------------------|------------|--------------------------------|
| To be depolluted | 1 | Cable (high current) | 1.3 | Printed Circuit Board Assembly |
| To be depolluted | 1 | Cable (low current) | 1.3 | Printed Circuit Board Assembly |
| To be depolluted | 1 | Capacitors | 1.3 | Printed Circuit Board Assembly |

Product description

| | |
|--|--|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Clipsal |
| Product function | The main function of the Medilec RCD is to protect the installation against overloads and short circuits, protect people and premises at risk of fire or explosion against insulation defects and the purpose of the switched socket outlet is to allow the electrical equipment to connect/disconnect with electrical grids. Additionally, all user touchpoints of the product are made from antibacterial materials. |
| Product reference | MLP3025RCD10A-WE |
| Additional similar product references | MLP3025RCD10A-RD MLP3025RCD10A-DB MLP3025RCD10A-BG |
| Total representative product mass | 180 g |
| Representative product dimensions | 116mm x 78mm x 46mm |
| Accessories | Not require |
| Date of information release | 05-12-2024 |

Additional information

| | |
|---|--|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. |
| In case of special transportation: transportation method | N/A |
| Recyclability potential | 42% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability). |

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.se.com/contact>

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €

www.se.com

ENVEOLI2412006_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

12-2024