Product Environmental Profile

Basic Rack Power Distribution Unit (PDU)



General information

Reference product	APC NetShelter Basic Rack PDU, 1U, 15A, 120V, 10 NEMA 5-15 outlets - AP9562
Description of the product	AP9562 is an APC NetShelter Basic Rack Power Distribution Unit (PDU) designed for 1U rack installation, providing 120 V AC power distribution through 10 output outlets. Its primary function is to distribute power from a single input source to multiple rack-mounted IT devices such as servers, network switches, and UPS systems
Description of the range	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.AP9559, AP7599, AP7580, and AP7555A belong to the same APC Rack PDU family and perform the same function of power distribution within IT racks. They share a common design, materials, manufacturing technology, and end use, with variations limited to electrical ratings and outlet configurations. Therefore, the environmental impacts are considered representative across the product range

Commercial Reference	Net weight (kg)	Weight with packaging (kg)	Dimensions (mm)	Outlet count
AP7555A	4.76	6.247	927 X 55 X 88	9
AP7580	6.36	7.27	89 X 437 X 89	4
AP7599	9.86	13.82	1178 X 56 X 95	30
AP9559	0.98	2.355	44 X 447 X 57	12
AP9562	**2.5**	**3.64**	**44 X 447 X 57**	**10**

	The products of the range are: AP9559, AP7599, AP7580, AP7555A, AP9559
Functional unit	Connect/disconnect the plug of loads consuming up to 15 A under a voltage of 120 V AC and distribute electrical power to up to 10 connected IT devices while protecting the user from direct contact with live parts in commercial/industrial applications, according to the appropriate use scenario, for a reference service life of 20 years.
Specifications are:	Input Voltage: 100-120 V AC Nominal Output Voltage: 120 V AC Rated Current (In): 15 A Line Rated Current: 12 A Frequency: 50/60 Hz Current Type: AC (Alternating Current) Load Capacity: 1400 VA Input Connection: NEMA 5-15P Output Connections: 10 × NEMA 5-15R outlets Power Cord Length: 3.65 m (12 ft)

Constituent materials

Reference product mass	3.64 kg	including the product, its packaging, additional elements and accessories

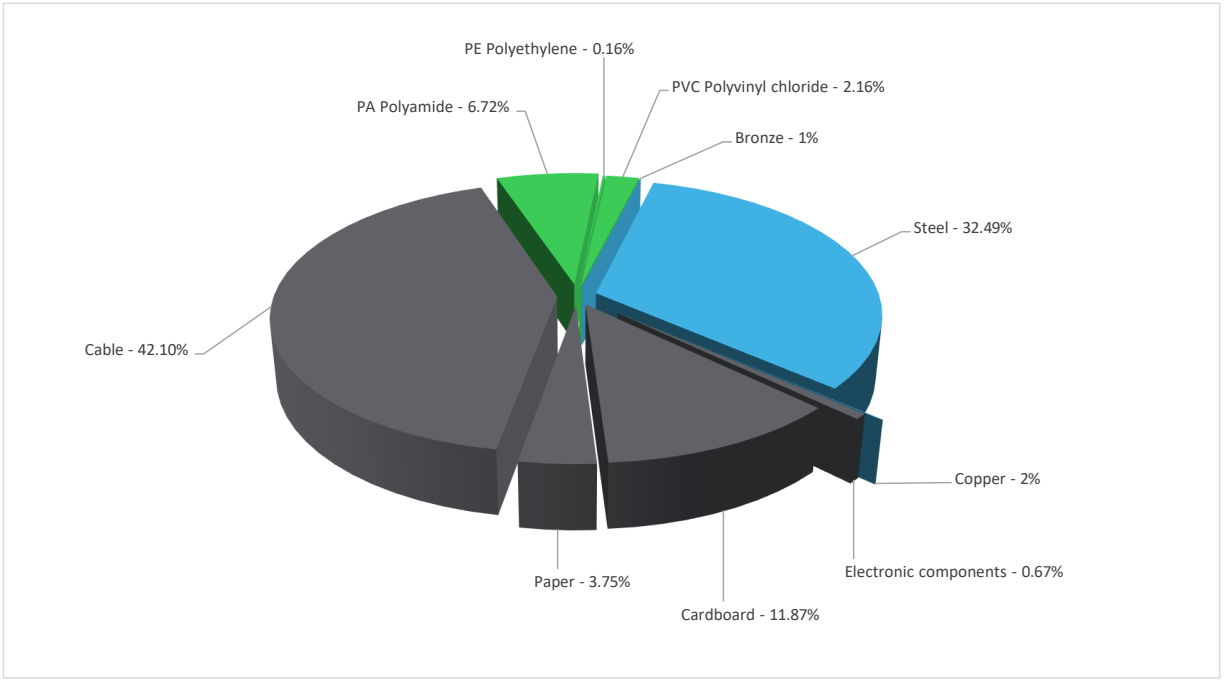

Others	58.39
Metals	32.57
Plastics	9.04

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website
https://www.se.com

Additional environmental information

End Of Life	Recyclability potential:	**35%**	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	10 years
Product category	Power socket - Household / Commercial
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal and disposal of packaging accounted for during installation.
Use scenario	Product lifetime energy consumption is estimated to be 3504 kWh over 20 years at a 50% load condition with 100% operating time.

Commercial Reference	Description	Energy consumption (kWh)
AP7555A	APC NetShelter Basic Rack PDU, Zero U, 22kW, 400V, 6 C19 and 3 C13 outlet, IEC309 inlet	7533
AP7580	APC NetShelter Basic Rack PDU Extender, 2U, 30A, 100/120/200/208V, 4 NEMA L5-20 outlet	6657
AP7599	APC NetShelter Basic Rack PDU, Zero U, 14.4kW, 208V,24 C13, 4 C19, 2 NEMA L6-30R outlet, 10ft input cord	18396
AP9559	APC NetShelter Basic Rack PDU, 1U, 16A, 208 & 230V, 10 C13 and 2 C19 outlets	4029
AP9562	**APC NetShelter Basic Rack PDU, 1U, 15A, 120V, 10 NEMA 5-15 outlets**	**3504**

Time representativeness	The collected data are representative of the year 2026			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are similar and representative of the actual type of technologies used to make the product.			
Geographical representativeness	**Final assembly site**	**Use phase**		**End-of-life**
	India	Global		Global
Energy model used	**[A1 - A3]**	**[A5]**	**[B6]**	**[C1 - C4]**
	Electricity mix; Production mix; low voltage; 2022; India, IN	No energy used	Electricity mix; Production mix; low voltage; 2022; United States, US Electricity mix; Production mix; low voltage; 2022; Global, GLO Electricity mix; Production mix; low voltage; 2022; China, CN	Global, European and French datasets are used.

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators		APC NetShelter Basic Rack PDU, 1U, 15A, 120V, 10 NEMA 5-15 outlets - AP9562						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	8.81E+02	2.25E+01	5.54E-01	1.12E+00	8.55E+02	2.25E+00	-6.77E+00
Contribution to climate change-fossil	kg CO2 eq	8.77E+02	2.34E+01	5.54E-01	2.11E-01	8.50E+02	2.24E+00	-6.66E+00
Contribution to climate change-biogenic	kg CO2 eq	4.43E+00	-8.71E-01	0*	9.08E-01	4.38E+00	9.05E-03	-1.06E-01
Contribution to climate change-land use and land use change	kg CO2 eq	3.96E-06	4.22E-07	1.03E-06	3.94E-08	0.00E+00	2.47E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	6.33E-06	2.87E-06	8.00E-09	7.92E-09	3.37E-06	7.99E-08	-2.06E-06
Contribution to acidification	mol H+ eq	4.23E+00	2.29E-01	1.00E-03	1.23E-03	3.99E+00	1.07E-02	-1.07E-01
Contribution to eutrophication, freshwater	kg P eq	1.52E-03	1.34E-04	2.14E-06	3.32E-07	1.38E-03	7.85E-06	-1.88E-05
Contribution to eutrophication, marine	kg N eq	5.25E-01	2.42E-02	2.01E-04	2.94E-04	4.98E-01	1.84E-03	-4.26E-03
Contribution to eutrophication, terrestrial	mol N eq	6.19E+00	2.73E-01	2.21E-03	3.92E-03	5.89E+00	2.34E-02	-4.83E-02
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.75E+00	9.23E-02	6.90E-04	8.30E-04	1.65E+00	5.75E-03	-2.20E-02
Contribution to resource use, minerals and metals	kg Sb eq	1.33E-03	1.20E-03	4.51E-07	0*	1.29E-04	7.96E-07	-1.58E-03
Contribution to resource use, fossils	MJ	1.89E+04	4.10E+02	1.03E+01	4.13E+00	1.84E+04	4.87E+01	-9.65E+01
Contribution to water use	m3 eq	5.96E+01	1.60E+01	2.32E-02	1.30E-02	4.34E+01	2.61E-01	-6.29E+00

Inventory flows Indicators		APC NetShelter Basic Rack PDU, 1U, 15A, 120V, 10 NEMA 5-15 outlets - AP9562						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	2.26E+03	8.93E+00	0*	3.29E-01	2.25E+03	2.15E+00	-2.51E+00
Contribution to renewable primary energy used as raw material	MJ	1.46E+01	1.46E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to total renewable primary energy	MJ	2.27E+03	2.35E+01	0*	3.29E-01	2.25E+03	2.15E+00	-2.51E+00
Contribution to non renewable primary energy used as energy	MJ	1.88E+04	3.67E+02	1.03E+01	4.13E+00	1.84E+04	4.87E+01	-9.65E+01
Contribution to non renewable primary energy used as raw material	MJ	4.32E+01	4.32E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to total non renewable primary energy	MJ	1.89E+04	4.10E+02	1.03E+01	4.13E+00	1.84E+04	4.87E+01	-9.65E+01
Contribution to use of secondary material	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to net use of fresh water	m^3	1.39E+00	3.72E-01	5.40E-04	2.97E-04	1.01E+00	7.32E-03	-1.47E-01
Contribution to hazardous waste disposed	kg	2.04E+01	3.17E+00	2.85E-03	2.21E-01	1.64E+01	5.65E-01	-1.18E+02
Contribution to non hazardous waste disposed	kg	1.42E+02	1.30E+01	6.34E-02	2.93E-02	1.28E+02	9.41E-01	-2.08E+00
Contribution to radioactive waste disposed	kg	3.48E-02	5.45E-03	5.02E-05	1.30E-05	2.91E-02	1.70E-04	-1.04E-03
Contribution to components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to materials for recycling	kg	9.17E-01	1.46E-01	0.00E+00	0.00E+00	0.00E+00	7.71E-01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to exported energy	MJ	1.51E-03	1.51E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product	kg of C	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg of C	1.76E-01

** The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)*

Mandatory Indicators		APC NetShelter Basic Rack PDU, 1U, 15A, 120V, 10 NEMA 5-15 outlets - AP9562							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	8.55E+02	0	0.00E+00	0	0	0	8.55E+02	0
Contribution to climate change-fossil	kg CO2 eq	8.50E+02	0	0.00E+00	0	0	0	8.50E+02	0
Contribution to climate change-biogenic	kg CO2 eq	4.38E+00	0	0.00E+00	0	0	0	4.38E+00	0
Contribution to climate change-land use and land use change	kg CO2 eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to ozone depletion	kg CFC-11 eq	3.37E-06	0	0.00E+00	0	0	0	3.37E-06	0
Contribution to acidification	mol H+ eq	3.99E+00	0	0.00E+00	0	0	0	3.99E+00	0
Contribution to eutrophication, freshwater	kg P eq	1.38E-03	0	0.00E+00	0	0	0	1.38E-03	0
Contribution to eutrophication marine	kg N eq	4.98E-01	0	0.00E+00	0	0	0	4.98E-01	0
Contribution to eutrophication, terrestrial	mol N eq	5.89E+00	0	0.00E+00	0	0	0	5.89E+00	0
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.65E+00	0	0.00E+00	0	0	0	1.65E+00	0
Contribution to resource use, minerals and metals	kg Sb eq	1.29E-04	0	0.00E+00	0	0	0	1.29E-04	0
Contribution to resource use, fossils	MJ	1.84E+04	0	0.00E+00	0	0	0	1.84E+04	0
Contribution to water use	m3 eq	4.34E+01	0	0.00E+00	0	0	0	4.34E+01	0

Inventory flows Indicators		APC NetShelter Basic Rack PDU, 1U, 15A, 120V, 10 NEMA 5-15 outlets - AP9562							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.25E+03	0	0.00E+00	0	0	0	2.25E+03	0
Contribution to use of renewable primary energy resources used as raw material	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to total use of renewable primary energy resources	MJ	2.25E+03	0	0.00E+00	0	0	0	2.25E+03	0
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.84E+04	0	0.00E+00	0	0	0	1.84E+04	0
Contribution to use of non renewable primary energy resources used as raw material	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to total use of non-renewable primary energy resources	MJ	1.84E+04	0	0.00E+00	0	0	0	1.84E+04	0
Contribution to use of secondary material	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to net use of freshwater	m³	1.01E+00	0	0.00E+00	0	0	0	1.01E+00	0
Contribution to hazardous waste disposed	kg	1.64E+01	0	0.00E+00	0	0	0	1.64E+01	0
Contribution to non hazardous waste disposed	kg	1.28E+02	0	0.00E+00	0	0	0	1.28E+02	0
Contribution to radioactive waste disposed	kg	2.91E-02	0	0.00E+00	0	0	0	2.91E-02	0
Contribution to components for reuse	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to materials for recycling	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to materials for energy recovery	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to exported energy	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0

** represents less than 0.01% of the total life cycle of the reference flow*

Life cycle assessment performed with EIME version v6.2.5-6, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP1512009EN	*Drafting rules*	PEP-PCR-ed4-2021 09 06
		Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
Date of issue	2026-11	*Information and reference documents*	www.pep-ecopassport.org
		Validity period	5 years

Independent verification of the declaration and data, in compliance with ISO 14021 : 2016

Internal X External

The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)

PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022

The components of the present PEP may not be compared with components from any other program.

Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"

Schneider Electric Industries SAS

Country Customer Care Center
http://www.se.com/contact

Head Office

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved