


Product Environmental Profile

SIGMA CARE ROOM SIGNAL LAMP

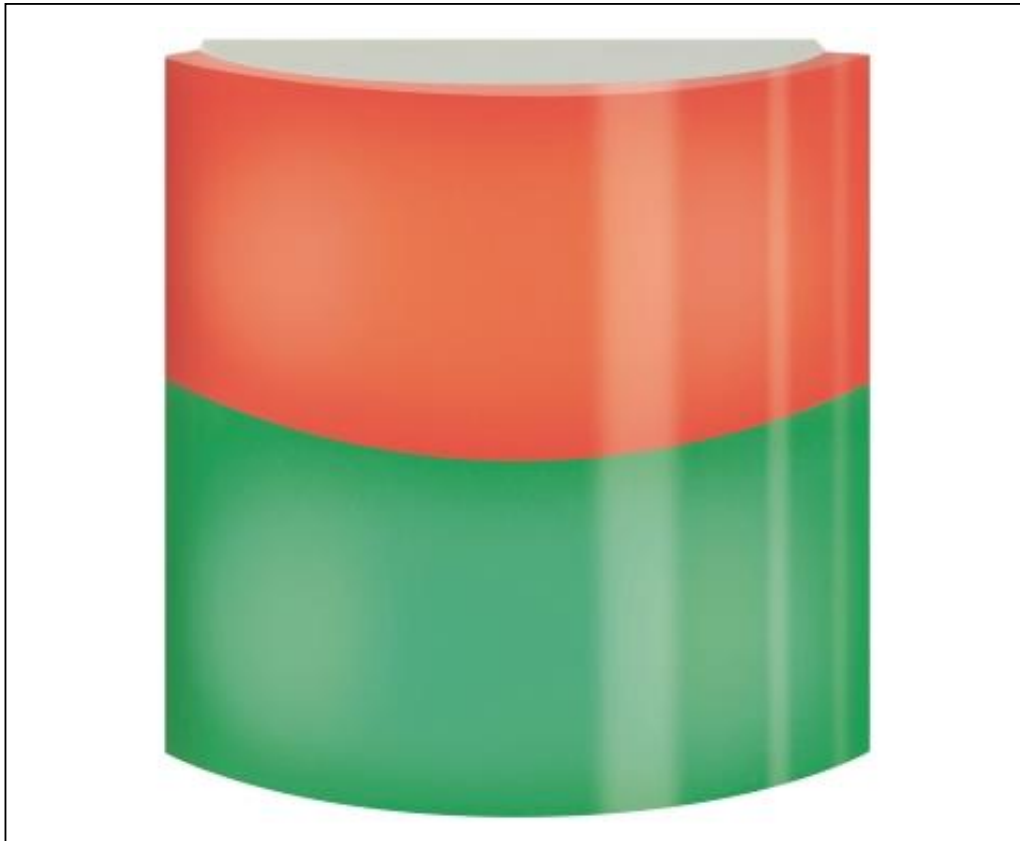


General information

Representative product	SIGMA CARE ROOM SIGNAL LAMP - ELG745010
Description of the product	The main function of Sigma care Room Module is for simple call system for equipping publicly accessible disabled WCs such as in public buildings, doctor's surgeries, department stores. The integration into a system bus is a Construction of small systems from up to 10 room modules and central display units. When used as a group signal light the device serves as a collective display of calls from the room modules connected to the system bus.
Functional unit	This product is to display a call release, shutdown, as well as a call forwarding by an optical and acoustic signaling for simple call systems according to DIN VDE 0834 for 10 years. Insulation 2 x MOPP (4kV) are according to EN60601-1.

Constituent materials

Reference product mass 165 g including the product, its packaging

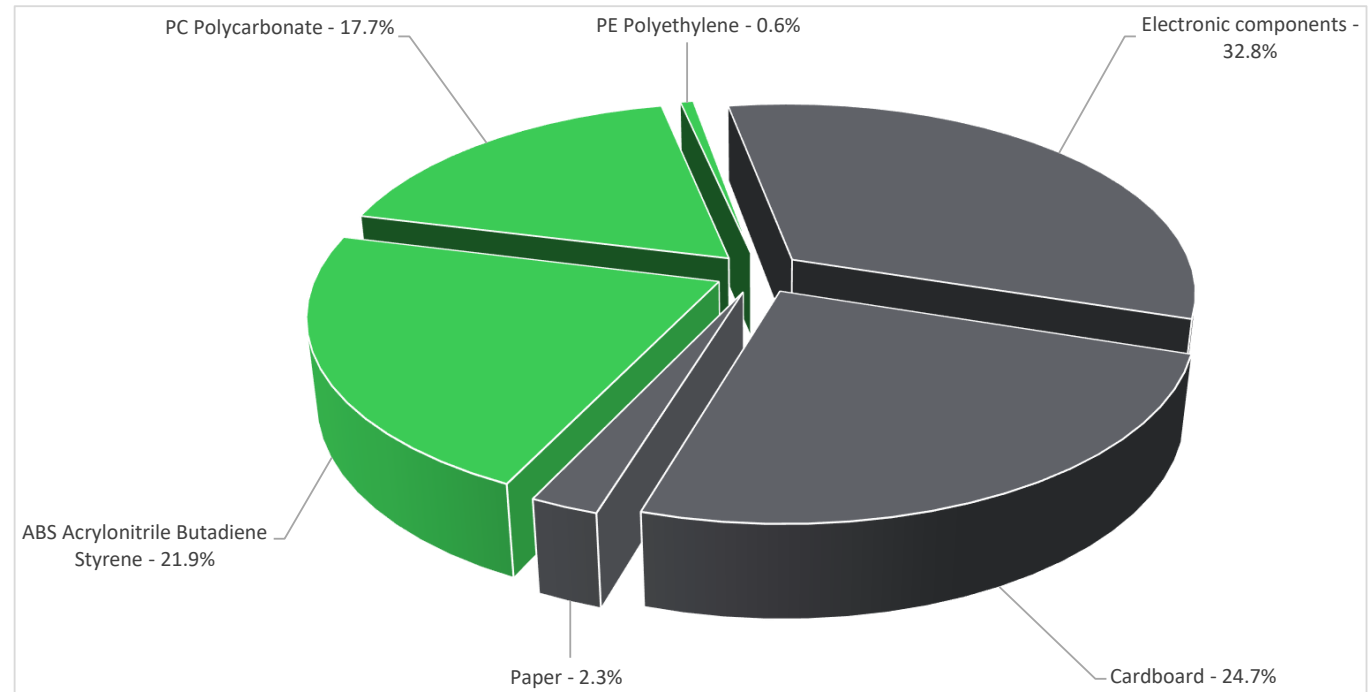

Plastics	40.2%
Metals	0.0%
Others	59.8%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The SIGMA CARE ROOM SIGNAL LAMP presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 45.7 g, consisting of Cardbaord (89.6%) & Paper (10.4%) Product distribution optimised by setting up local distribution centres
Installation	This product does not require special installation operation. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The device itself does NOT require special maintenance like changing of batteries etc, BUT when installed on site, DIN VDE 0834 demands quarterly functional inspection of the installed call system.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains PCB Assembly (54.5g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 29% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	Average lifetime 10 years (depending on usage intensity and/or connected load) years			
Product category	Other equipments - Active product			
Installation elements	End of life of the packaging, materials for installation			
Use scenario	The product is in active mode 10% of the time with a power use of 2.9W and in Standby mode 90% of the time with a power use of 1.2W, for 10 years			
Geographical representativeness	Germany			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
Energy model used	Manufacturing	Installation	Use	End of life
	Manufacturing Plant: ELSO, Germany	Electricity grid mix; AC; consumption mix, at consumer; 230V; DE	Electricity grid mix; AC; consumption mix, at consumer; 230V; DE	Electricity grid mix; AC; consumption mix, at consumer; 230V; DE

Compulsory indicators		SIGMA CARE ROOM SIGNAL LAMP - ELG745010					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.01E-03	1.01E-03	0*	0*	5.86E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.37E-01	1.79E-02	7.70E-05	0*	1.19E-01	6.01E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.99E-02	6.69E-03	1.78E-05	2.81E-06	1.31E-02	2.98E-05
Contribution to global warming	kg CO ₂ eq	8.82E+01	1.29E+01	1.63E-02	0*	7.51E+01	9.32E-02
Contribution to ozone layer depletion	kg CFC11 eq	2.01E-06	1.64E-06	0*	0*	3.69E-07	3.25E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	9.66E-03	1.75E-03	5.54E-06	0*	7.89E-03	4.98E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.81E+02	6.36E-02	0*	0*	1.81E+02	0*
Total Primary Energy	MJ	1.42E+03	1.84E+02	2.30E-01	0*	1.23E+03	2.56E-01

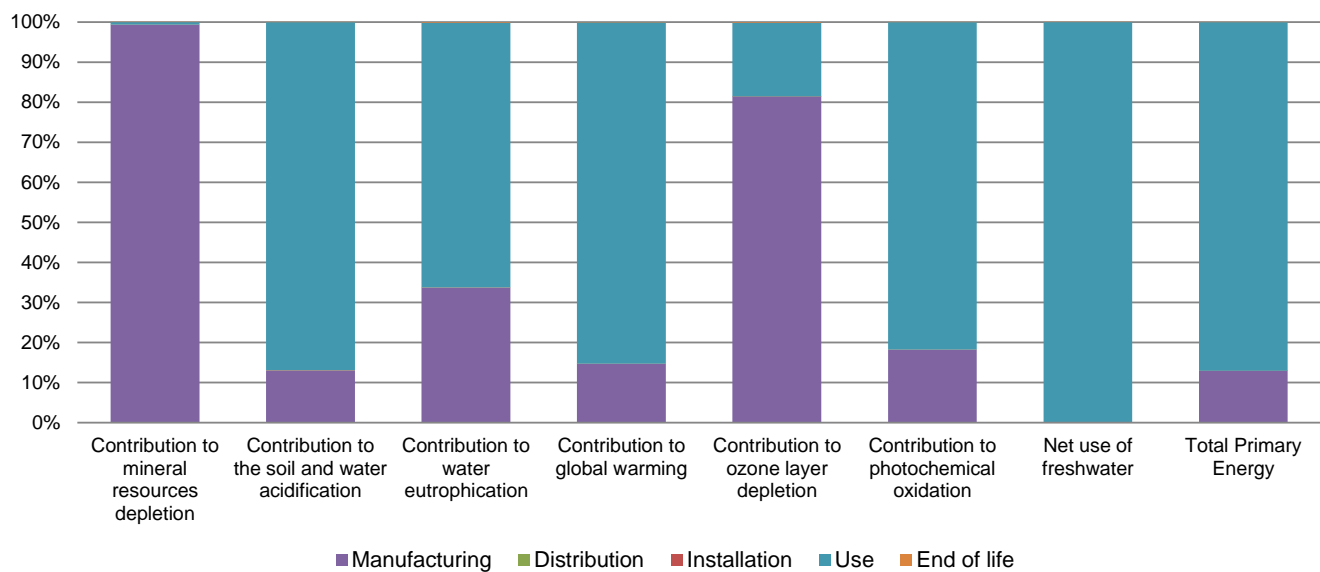

Optional indicators		SIGMA CARE ROOM SIGNAL LAMP - ELG745010					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	8.87E+02	1.34E+02	2.28E-01	0*	7.52E+02	2.10E-01
Contribution to air pollution	m ³	3.27E+03	1.16E+03	7.49E-01	0*	2.11E+03	1.86E+00
Contribution to water pollution	m ³	4.90E+03	9.49E+02	2.67E+00	0*	3.95E+03	4.01E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3.86E-02	3.86E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.87E+02	8.15E+00	0*	0*	1.79E+02	0*
Total use of non-renewable primary energy resources	MJ	1.23E+03	1.75E+02	2.30E-01	0*	1.05E+03	2.56E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.87E+02	7.96E+00	0*	0*	1.79E+02	0*
Use of renewable primary energy resources used as raw material	MJ	1.87E-01	1.87E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.23E+03	1.72E+02	2.30E-01	0*	1.05E+03	2.56E-01
Use of non renewable primary energy resources used as raw material	MJ	3.06E+00	3.06E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*

Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.57E+01	1.54E+01	0*	0*	1.84E-02	2.61E-01
Non hazardous waste disposed	kg	4.13E+02	4.52E+00	0*	0*	4.09E+02	0*
Radioactive waste disposed	kg	1.36E-01	1.23E-02	0*	0*	1.23E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	9.07E-02	1.14E-02	0*	4.49E-02	0*	3.45E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.53E-02	0*	0*	0*	0*	2.53E-02
Exported Energy	MJ	1.42E-04	1.33E-05	0*	1.28E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2016-11 in compliance with ISO14044.

The Manufacturing phase is impacting on Indicator of Abiotic depletion (elements, ultimate reserves) (ADPe for EN15804) & Ozone layer depletion ODP steady state (ODP for EN15804). The Manufacturing phase & Use phase are impacting equally on Indicator Eutrophication (fate not incl.) (EP for EN15804). And the Use phase is impacting on the rest of the Indicators Acidification potential of soil and water (total average for Europe) (A for PEP), Global warming (GWP100) (GWP for EN15804), Photochemical oxidation (high NOx) (POCP for EN15804) & Net use of freshwater (NUFW) & Total Primary Energy (TPE).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2202027_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	04/2022	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2202027_V1

© 2019 - Schneider Electric – All rights reserved

04/2022