Product Environmental Profile

MAX9 RESIDUAL CURRENT CIRCUIT BREAKER




General information

Reference product	Max9 RCCB 2P 40A 30mA A - MX9RC240
Description of the product	The main function of the SLIM MAX9 RCCB is to ensure protection of persons against electric shocks.
Functional unit	Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage [U] 230V and rated current [In] 40A. This protection is ensured in accordance with the following parameters: - Number of poles (Np) - 2P+N - Tripping curve (Cd) - A - Sensitivity (S) - 30mA - Type of differential protection (Tp) - AC It has an IP20 degree of protection (as per IEC 60529 standard) and the product follow AS/NZS 61008 and IEC 61008 standards.

Constituent materials

Reference product mass	214 g	including the product, its packaging.

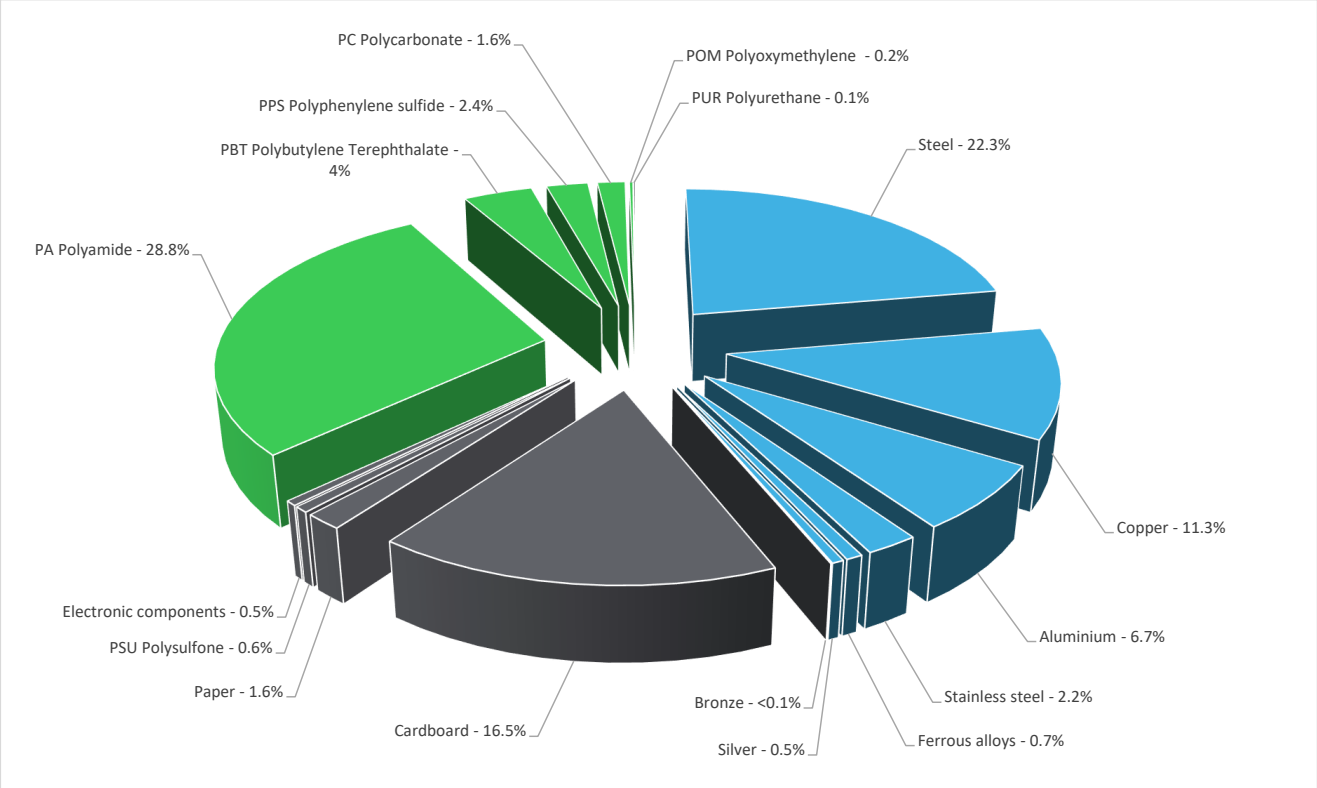

	Plastics	37.1%
	Metals	43.7%
	Others	19.2%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
https://www.se.com/ww/en/work/support/green-premium/

Additional environmental information

End Of Life	Recyclability potential:	**53%**	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	20 years
Product category	Circuit-breakers
Installation elements	The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).
Use scenario	Full load is 6.4 W power loses. The product is used 30% of the time (see PSR) with a power use of 1.6 W for 20 years.
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.
Geographical representativeness	Australia

Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; IN	Electricity Mix; Production mix; Low voltage; AUS	Electricity Mix; Production mix; Low voltage; AUS	Electricity Mix; Production mix; Low voltage; AUS

Detailed results, including all the impact indicators mentioned in PCRed4, are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators		MAX9 RESIDUAL CURRENT CIRCUIT BREAKER - MX9RC240						
Impact indicators	Unit	Total	Manufacturing [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Benefits [D]
Contribution to climate change	kg CO2 eq	8.13E+01	2.25E+00	3.87E-01	7.90E-02	7.82E+01	4.73E-01	-1.14E+00
Contribution to climate change-fossil	kg CO2 eq	8.13E+01	2.23E+00	3.87E-01	7.55E-02	7.81E+01	4.67E-01	-1.12E+00
Contribution to climate change-biogenic	kg CO2 eq	7.21E-02	2.49E-02	0*	3.51E-03	3.81E-02	5.59E-03	-1.98E-02
Contribution to climate change-land use and land use change	kg CO2 eq	9.27E-08	1.29E-09	0*	0*	0*	9.14E-08	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.62E-06	8.89E-07	3.42E-07	5.23E-09	3.80E-07	5.11E-09	-1.75E-07
Contribution to acidification	mol H+ eq	5.41E-01	2.51E-02	1.70E-03	3.14E-04	5.13E-01	1.48E-03	-1.37E-02
Contribution to eutrophication, freshwater	kg $(PO4)^{3-}$eq	2.22E-04	2.61E-05	4.54E-08	5.71E-07	5.53E-07	1.95E-04	-2.84E-06
Contribution to eutrophication marine	kg N eq	6.11E-02	3.23E-03	7.84E-04	8.30E-05	5.67E-02	2.82E-04	-7.39E-04
Contribution to eutrophication, terrestrial	mol N eq	6.91E-01	3.52E-02	8.49E-03	6.27E-04	6.44E-01	2.90E-03	-8.28E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	2.05E-01	1.17E-02	2.78E-03	1.67E-04	1.89E-01	8.36E-04	-3.20E-03
Contribution to resource use, minerals and metals	kg Sb eq	1.08E-03	1.07E-03	0*	0*	1.21E-06	5.49E-06	-2.82E-04
Contribution to resource use, fossils	MJ	1.26E+03	3.27E+01	4.71E+00	8.22E-01	1.21E+03	1.37E+01	-2.18E+01
Contribution to water use	m3 eq	4.58E+00	4.94E-01	1.97E-02	3.37E-02	3.09E+00	9.38E-01	-7.39E-01

Inventory flows Indicators		MAX9 RESIDUAL CURRENT CIRCUIT BREAKER - MX9RC240						
Inventory flows	Unit	Total	Manufact. [A1 - A3]	Distribution [A4]	Installation [A5]	Use [B1 - B7]	End of Life [C1 - C4]	Benefits [D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	9.19E+01	5.33E-01	0*	5.90E-02	9.12E+01	1.36E-01	-1.58E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	3.03E-01	3.03E-01	0*	0*	0*	0*	-5.26E-01
Contribution to total use of renewable primary energy resources	MJ	9.22E+01	8.36E-01	0*	5.90E-02	9.12E+01	1.36E-01	-6.84E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.26E+03	3.06E+01	4.71E+00	8.22E-01	1.21E+03	1.37E+01	-2.18E+01
Contribution to use of non renewable primary energy resources used as raw material	MJ	2.01E+00	2.01E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	1.26E+03	3.27E+01	4.71E+00	8.22E-01	1.21E+03	1.37E+01	-2.18E+01
Contribution to use of secondary material	kg	2.82E-02	2.82E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

Contribution to net use of freshwater	m³	1.09E-01	1.15E-02	4.58E-04	7.85E-04	7.20E-02	2.39E-02	-1.72E-02
Contribution to hazardous waste disposed	kg	1.42E+01	1.20E+01	0*	0*	1.99E+00	2.03E-01	-2.30E+01
Contribution to non hazardous waste disposed	kg	1.46E+01	1.66E+00	0*	2.57E-01	1.26E+01	8.15E-02	-1.76E+00
Contribution to radioactive waste disposed	kg	1.94E-03	5.88E-04	7.71E-05	3.45E-05	1.24E-03	4.12E-06	-6.35E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	2.01E-01	5.32E-02	0*	4.34E-02	0*	1.04E-01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

** represents less than 0.01% of the total life cycle of the reference flow*

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2206035_V1	*Drafting rules*	PEP-PCR-ed4-2021 09 06
Validity period	5 years	*Supplemented by*	PSR-0005-ed2-2016 03 29
Date of issue	03/2024	*Information and reference documents*	www.pep-ecopassport.org

Independent verification of the declaration and data, in compliance with ISO 14021 : 2016

Internal X External

The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)

PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »

Schneider Electric Industries SAS

Country Customer Care Center
http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVPEP2206035_V1

©2023 - Schneider Electric – All rights reserved

03/2024