



# Clipsal Solis™

Technical Catalogue

 **CLIPSAL®**

[clipsal.com](https://clipsal.com)

**Schneider**  
 **Electric™**







# Contents

|                               |       |
|-------------------------------|-------|
| Introduction .....            | 04-09 |
| Clipsal Solis™ .....          | 10-27 |
| Sockets.....                  | 11-14 |
| Switches .....                | 15-23 |
| Adaptors.....                 | 24-27 |
| Clipsal Solis™ T Series ..... | 28-47 |
| Sockets.....                  | 29-32 |
| Switches .....                | 33-41 |
| Adaptors.....                 | 42-47 |
| Mounting Accessories .....    | 48-54 |
| Cut-out standards .....       | 52    |
| Compatibility Chart.....      | 53-54 |
| Wiring Diagrams .....         | 55-62 |
| References .....              | 63    |



## Welcome to Clipsal Solis™

At Clipsal, we are committed to redefining modern living through innovation and design excellence.

Derived from the Latin word for “sun”, Solis is an exciting benchmark in interior design for Australian homes. Based on a vision to seamlessly blend cutting-edge technology with timeless aesthetics, creating products that not only enhance a space but also elevates lifestyle.

## Experience the Essence of Innovation

Step into a world where form meets function, where every detail is meticulously crafted not only to enhance the design aesthetic within home spaces, but also to simplify the functionality for homeowners.

*“What we do fundamentally has a function first, and that function is the most important thing. So the design is more about elevating that to something that is pleasing, or expressing that function in a really interesting, novel, or high quality way.”*

**Tim Turrini-Rochford, Schneider Electric’s VP Design Asia Pacific**

The simplicity of detail offers a curated range of products that seamlessly integrate into environments, providing design solutions for modern living.





## Realise a Creative Vision

With Clipsal Solis, creativity knows no bounds. The intuitive range empowers personalisation of spaces and brings design ideas to life.

From customisable lighting solutions to innovative home automation systems, Solis offers the freedom to express style with ease. Imagine the possibilities as the perfect outcome is created effortlessly - without compromise.

## Adaptable to Different Environments

Experience the transformative nature of the Clipsal Solis Collection as it elevates room environments to new heights. Whether designing a contemporary home with contrasting materials or cutting-edge minimalistic spaces, our products are designed to seamlessly integrate into any setting.

Immerse yourself in a world of possibilities, where every option is defined by innovation and elegance.

## The Promise of Quality

With the Clipsal Solis Collection, our commitment to quality is uncompromising. We pride ourselves on using only the finest materials and the latest manufacturing techniques to ensure that each product meets the highest standards of excellence.


From design concept to final production, the focus is on delivering excellence in every detail, with strong emphasis on build and craftsmanship - providing years of reliable performance and timeless style.

# Clipsal Solis™ and Solis™ T Series

Two optimum ranges designed for high-end residential, each providing a unique touch-and-feel experience. Both with smart features for complete control and flexibility, each range offers ease of installation and reliability that you are accustomed to from Clipsal.



Clipsal Solis is monochromatic simplicity at its finest. With two smooth matte finishes, this push button and switch design sits flush in an ultra-slim cover for an elegant addition to a home.

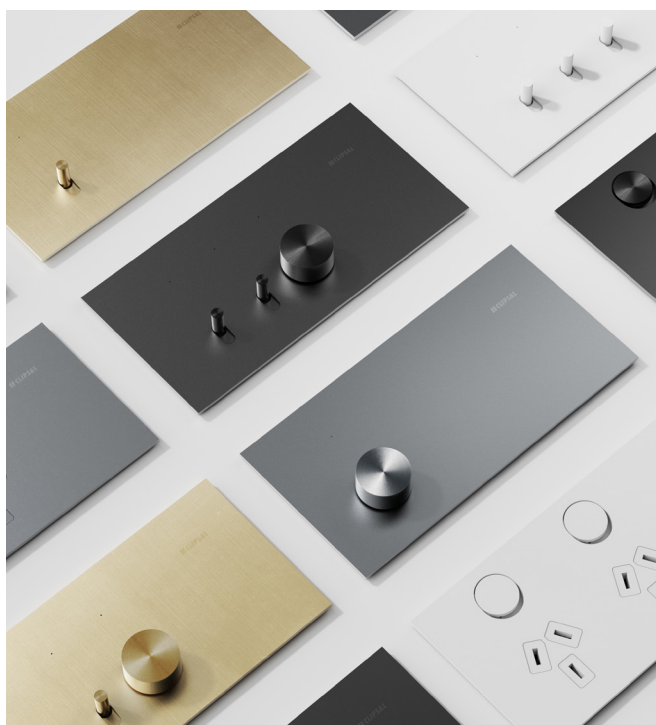

Clipsal Solis T Series has a unique design made with authentic materials, creating the ultimate tactile experience. With distinctive toggle switches and a refined socket design, it offers a considered finish. Available in four premium finishes: Platinum Aluminium, Ebony Aluminium, Brushed Brass, and White Ceramic.





## Join the Clipsal Solis Era




Join us in embracing the next level of design innovation with the Clipsal Solis Collection. Discover how our unparalleled range of products can transform a space into a masterpiece of modern living.

Visit [clipsal.com](https://clipsal.com) to learn more about our products and how the Clipsal Solis Collection can transform your space into a sanctuary of style and sophistication.

Let us help you unlock the full potential of your environment and experience the future of living, today.

# Clipsal Solis™




## Switch and Power Point Overview

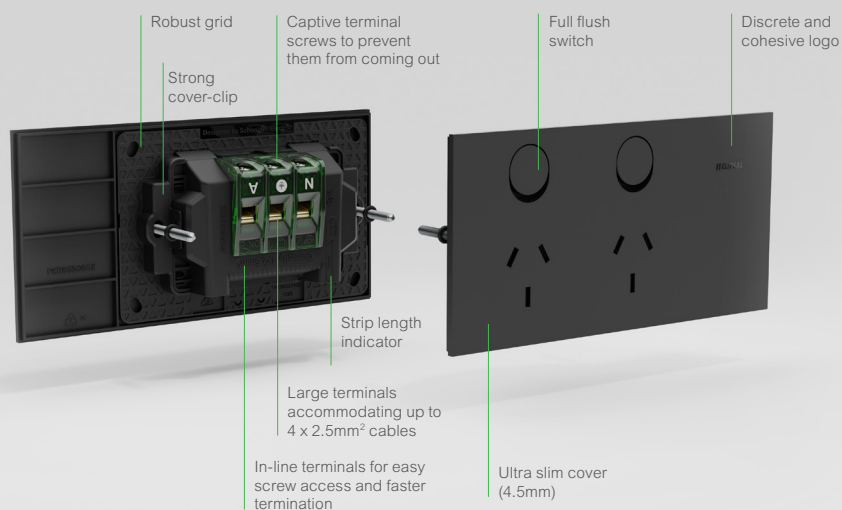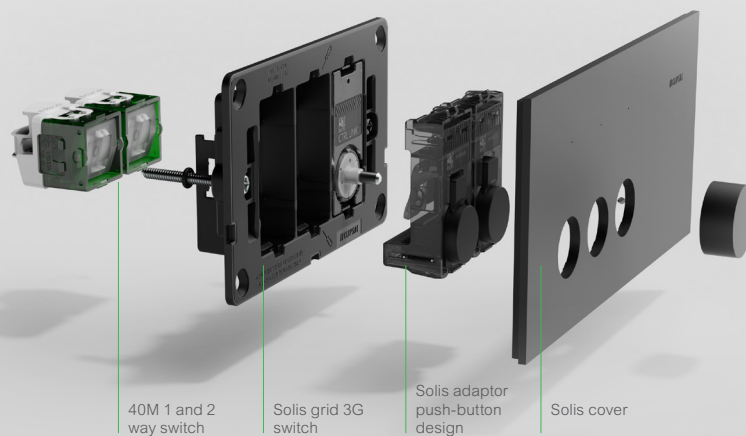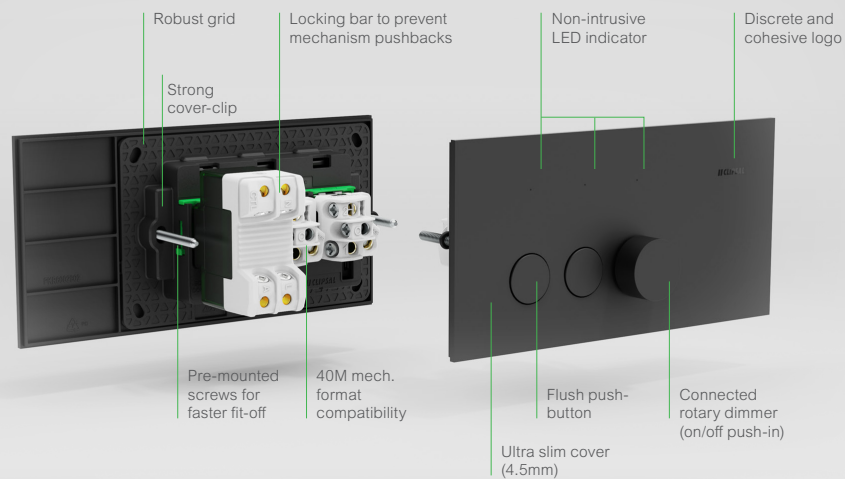



# Clipsal Solis™ T Series

## Switch and Power Point Overview

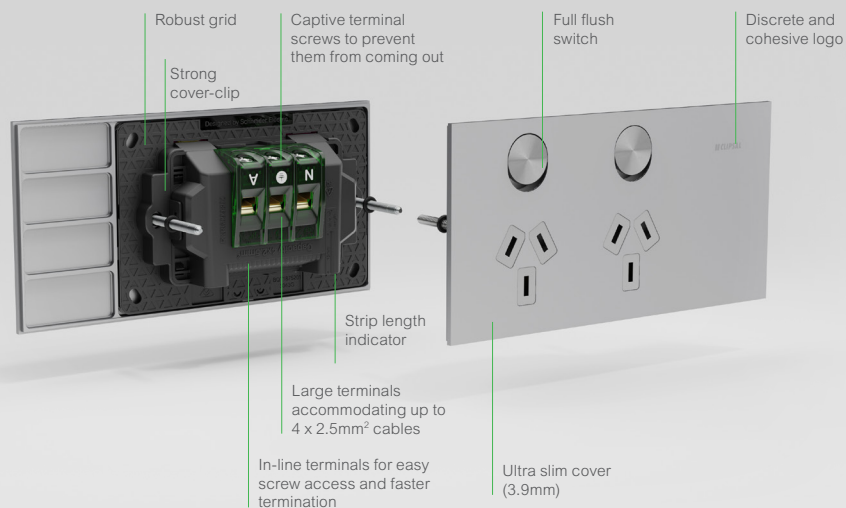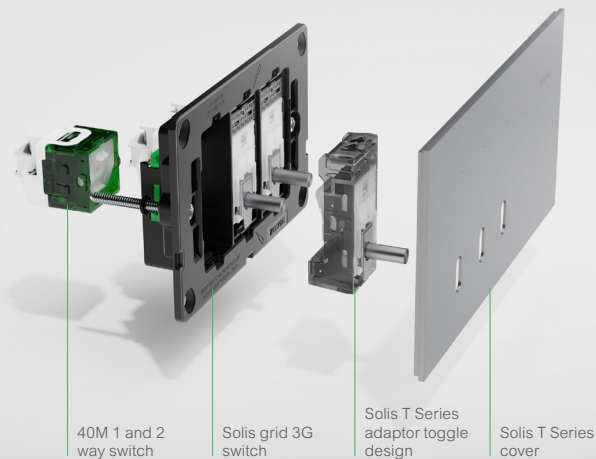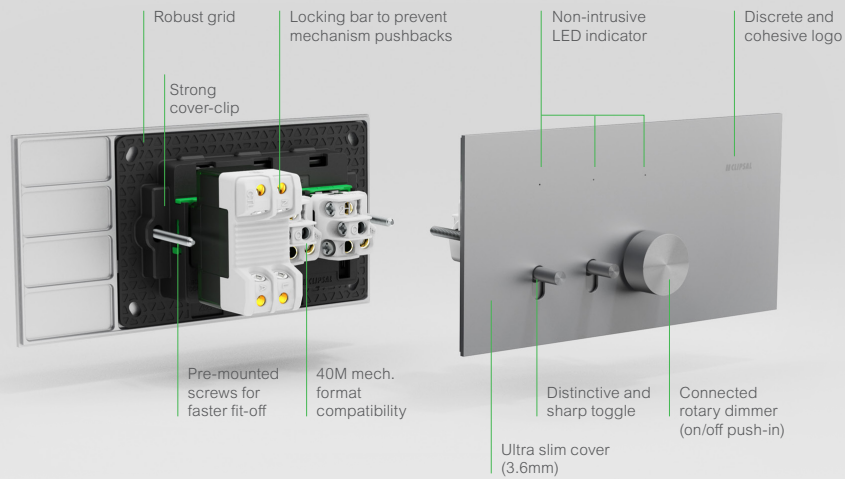

# Clipsal Solis™





# Sockets

## 1010CSZ

Single Connected Switched Socket (Zigbee)


| Main                 |                                |                                           |
|----------------------|--------------------------------|-------------------------------------------|
| Range                | Clipsal Solis                  |                                           |
| Commercial reference | <b>1010CSZ-ZW</b>              | <b>1010CSZ-ZB</b>                         |
| Product colour       | <input type="checkbox"/> White | <input checked="" type="checkbox"/> Black |
| Product type         | Switched socket                |                                           |
| Mobile app           | Wiser by SE                    |                                           |
| Outlet standard      | AS/NZS 3112                    |                                           |

| Complementary              |                                                    |
|----------------------------|----------------------------------------------------|
| Rated voltage              | 230/240 V AC 50 Hz                                 |
| Rated current              | 10 A                                               |
| Number of outlets          | 1                                                  |
| Number of switches         | 1                                                  |
| Facia material             | Plastic                                            |
| Surface finish             | Matt                                               |
| Surface treatment          | Painted                                            |
| Installation orientation   | Horizontal only                                    |
| Control type               | Push button                                        |
| Protection                 | With shutter                                       |
| Communication network type | Wireless Zigbee (2405...2480 MHz), 10 mW at < 50 m |
| Memory description         | Backup memory - date and time for 6 h              |
| Mounting                   | Flush mounted                                      |
| Mounting type              | Screws                                             |
| Mounting centres           | 84 mm                                              |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1)      |
| Terminals type             | Screw terminals                                    |
| Terminals capacity         | 4 × 2.5...3 × 4.0 mm <sup>2</sup>                  |
| Dimensions (H × W × D)     | 74 × 148 × 68.3 mm                                 |
| Stripping length           | 16 mm                                              |
| Embedded depth             | 64 mm                                              |
| Cover thickness            | 4.5 mm                                             |
| Cut out (L × H)            | 95 × 54 mm                                         |
| Product certifications     | RCM                                                |


| Packing Units              |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



Download  
**Wiser by SE app**  
Schneider Electric's connected  
technology for homes

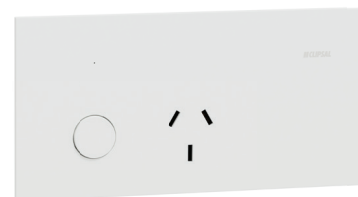

## Dimensions (mm)

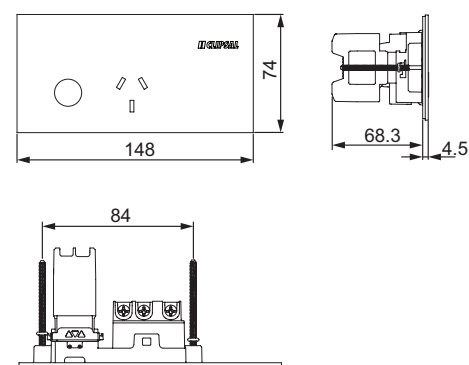

For more detailed information, refer to the Wiser Guides online. Scan the QR code or follow the link:  
[https://www.productinfo.schneider-electric.com/wiser\\_eu/](https://www.productinfo.schneider-electric.com/wiser_eu/)

## Sockets

## 1025

Switched Socket Horizontal Twin 10 A

## Main

|                      |                                |                                           |
|----------------------|--------------------------------|-------------------------------------------|
| Range                | Clipsal Solis                  |                                           |
| Commercial reference | <b>1025-ZW</b>                 | <b>1025-ZB</b>                            |
| Product colour       | <input type="checkbox"/> White | <input checked="" type="checkbox"/> Black |
| Product type         | Switched socket                |                                           |
| Outlet standard      | AS/NZS 3112                    |                                           |

## Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |
| Rated current            | 10 A                                          |
| Number of outlets        | 2                                             |
| Number of switches       | 2                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Control type             | Flush rocker                                  |
| Protection               | With shutter                                  |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Terminals type           | Screw terminals                               |
| Terminals capacity       | 4 × 2.5...3 × 4.0 mm <sup>2</sup>             |
| Dimensions (H × W × D)   | 74 × 148 × 28 mm                              |
| Stripping length         | 16 mm                                         |
| Embedded depth           | 23.5 mm                                       |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

## Environment


|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|

## Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

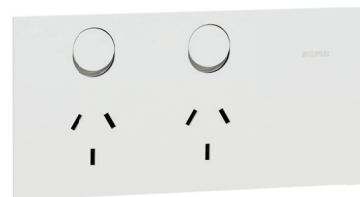

## Dimensions (mm)

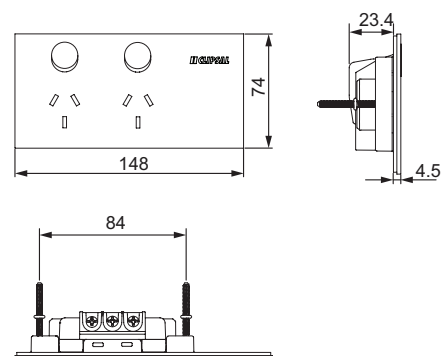



# Sockets

## 1025XUA

Switched Socket Horizontal Twin 1 ExBLANK 10 A

### Main

|                      |                   |                   |
|----------------------|-------------------|-------------------|
| Range                | Clipsal Solis     |                   |
| Commercial reference | <b>1025XUA-ZW</b> | <b>1025XUA-ZB</b> |
| Product colour       | □ White           | ■ Black           |
| Product type         | Switched socket   |                   |
| Outlet standard      | AS/NZS 3112       |                   |

### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |
| Rated current            | 10 A                                          |
| Number of outlets        | 2                                             |
| Number of switches       | 2                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Control type             | Flush rocker                                  |
| Protection               | With shutter                                  |
| Additional function      | Extra aperture                                |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 120 mm                                        |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Terminals type           | Screw terminals                               |
| Terminals capacity       | 4 × 2.5...3 × 4.0 mm <sup>2</sup>             |
| Dimensions (H × W × D)   | 74 × 148 × 28 mm                              |
| Stripping length         | 16 mm                                         |
| Embedded depth           | 23.5 mm                                       |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 131 × 54 mm                                   |

### Environment


|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|

### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

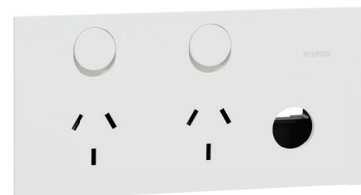

### Dimensions (mm)

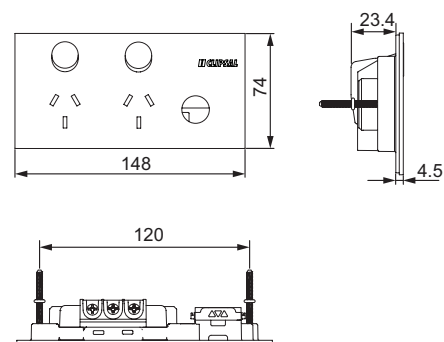

## Sockets

### 1025USBC

Switched Socket Horizontal Twin Type C USB Fast Charger 10 A

#### Main

|                      |                                              |                                           |
|----------------------|----------------------------------------------|-------------------------------------------|
| Range                | Clipsal Solis                                |                                           |
| Commercial reference | <b>1025USBC-ZW</b>                           | <b>1025USBC-ZB</b>                        |
| Product colour       | <input type="checkbox"/> White               | <input checked="" type="checkbox"/> Black |
| Product type         | Switched socket with type C USB fast charger |                                           |
| Outlet standard      | AS/NZS 3112                                  |                                           |

#### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |
| Rated current            | 10 A                                          |
| Number of outlets        | 2                                             |
| Number of switches       | 2                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Control type             | Flush rocker                                  |
| Protection               | With shutter                                  |
| Additional function      | Type C USB fast charger                       |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 120 mm                                        |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Terminals type           | Screw terminals                               |
| Terminals capacity       | 4 × 2.5...3 × 4.0 mm <sup>2</sup>             |
| Dimensions (H × W × D)   | 74 × 148 × 63 mm                              |
| Stripping length         | 16 mm                                         |
| Embedded depth           | 60 mm                                         |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 131 × 54 mm                                   |

#### Environment


|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|

#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

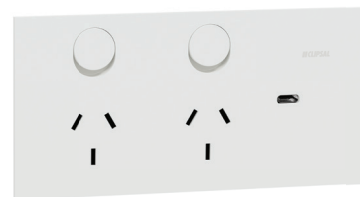

#### Dimensions (mm)

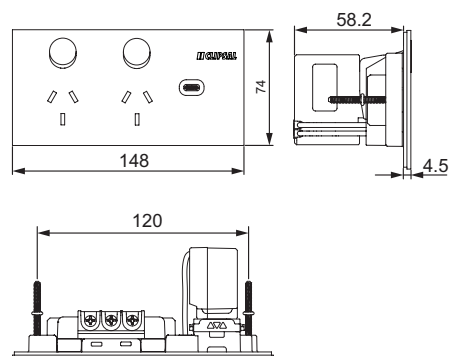

# Switches

## 1041PA

Switch Horizontal 1-gang 10 AX

### Main

|                      |                  |                  |
|----------------------|------------------|------------------|
| Range                | Clipsal Solis    |                  |
| Commercial reference | <b>1041PA-ZW</b> | <b>1041PA-ZB</b> |
| Product colour       | □ White          | ■ Black          |
| Product type         | Switch           |                  |
| Switch standard      | AS/NZS 60669     |                  |

### Complementary

|                          |                                               |
|--------------------------|-----------------------------------------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |
| Rated current            | 10 AX<br>iLED lamp 100 W                      |
| M-rating                 | M80                                           |
| Number of switches       | 1                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Control type             | Push button                                   |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Terminals type           | Screw terminals                               |
| Terminals capacity       | 4 × 1.5...3 × 2.5 mm <sup>2</sup>             |
| Dimensions (H × W × D)   | 74 × 148 × 45.5 mm                            |
| Stripping length         | 10 mm                                         |
| Embedded depth           | 41 mm                                         |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

### Environment


|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|

### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



### Dimensions (mm)

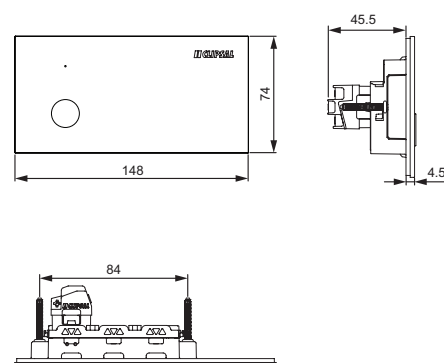



## Switches

### 1042PA

Switch Horizontal 2-gang 10 AX

#### Main

|                      |                  |                  |
|----------------------|------------------|------------------|
| Range                | Clipsal Solis    |                  |
| Commercial reference | <b>1042PA-ZW</b> | <b>1042PA-ZB</b> |
| Product colour       | □ White          | ■ Black          |
| Product type         | Switch           |                  |
| Switch standard      | AS/NZS 60669     |                  |

#### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |
| Rated current            | 10 AX<br>iLED lamp 100 W                      |
| M-rating                 | M80                                           |
| Number of switches       | 2                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Control type             | Push button                                   |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Terminals type           | Screw terminals                               |
| Terminals capacity       | 4 × 1.5...3 × 2.5 mm <sup>2</sup>             |
| Dimensions (H × W × D)   | 74 × 148 × 45.5 mm                            |
| Stripping length         | 10 mm                                         |
| Embedded depth           | 41 mm                                         |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

#### Environment


|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|

#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

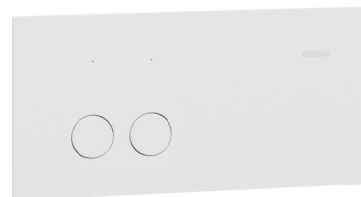

#### Dimensions (mm)

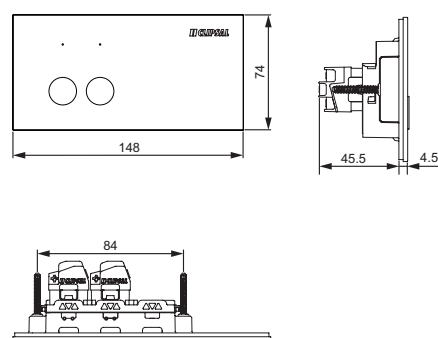

# Switches

## 1043PA

Switch Horizontal 3-gang 10 AX

### Main

|                      |                  |                  |
|----------------------|------------------|------------------|
| Range                | Clipsal Solis    |                  |
| Commercial reference | <b>1043PA-ZW</b> | <b>1043PA-ZB</b> |
| Product colour       | □ White          | ■ Black          |
| Product type         | Switch           |                  |
| Switch standard      | AS/NZS 60669     |                  |

### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |
| Rated current            | 10 AX<br>iLED lamp 100 W                      |
| M-rating                 | M80                                           |
| Number of switches       | 3                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Control type             | Push button                                   |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Terminals type           | Screw terminals                               |
| Terminals capacity       | 4 × 1.5...3 × 2.5 mm <sup>2</sup>             |
| Dimensions (H × W × D)   | 74 × 148 × 45.5 mm                            |
| Stripping length         | 10 mm                                         |
| Embedded depth           | 41 mm                                         |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

### Environment


|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|

### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

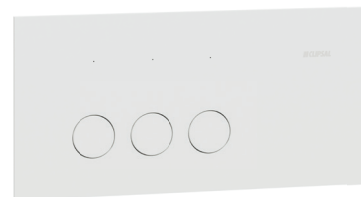

### Dimensions (mm)

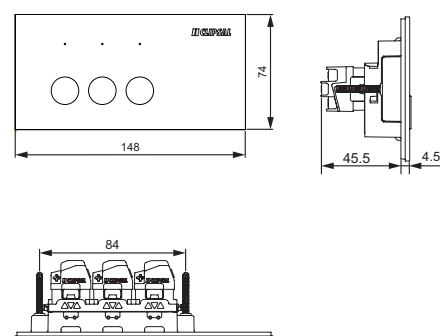

## Switches

### 1044PA

Switch Horizontal 4-gang 10 AX

#### Main

|                      |                  |                  |
|----------------------|------------------|------------------|
| Range                | Clipsal Solis    |                  |
| Commercial reference | <b>1044PA-ZW</b> | <b>1044PA-ZB</b> |
| Product colour       | □ White          | ■ Black          |
| Product type         | Switch           |                  |
| Switch standard      | AS/NZS 60669     |                  |

#### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |
| Rated current            | 10 AX<br>iLED lamp 100 W                      |
| M-rating                 | M80                                           |
| Number of switches       | 4                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Control type             | Push button                                   |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 120 mm                                        |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Terminals type           | Screw terminals                               |
| Terminals capacity       | 4 × 1.5...3 × 2.5 mm <sup>2</sup>             |
| Dimensions (H × W × D)   | 74 × 148 × 45.5 mm                            |
| Stripping length         | 10 mm                                         |
| Embedded depth           | 41 mm                                         |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 131 × 54 mm                                   |

#### Environment


|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|

#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

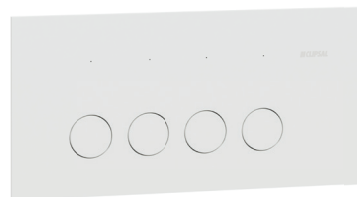

#### Dimensions (mm)

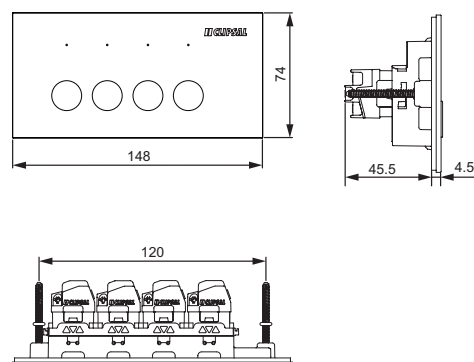

# Switches

## 1041PUA

Switch Grid and Cover Horizontal 1-gang

### Main

|                      |                   |                   |
|----------------------|-------------------|-------------------|
| Range                | Clipsal Solis     |                   |
| Commercial reference | <b>1041PUA-ZW</b> | <b>1041PUA-ZB</b> |
| Product colour       | □ White           | ■ Black           |
| Product type         | Grid and cover    |                   |

### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Number of switches       | 1                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Dimensions (H × W × D)   | 74 × 148 × 23.5 mm                            |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



### Dimensions (mm)

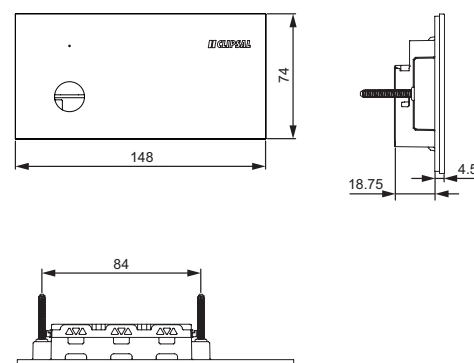



## Switches

### 1042PUA

Switch Grid and Cover Horizontal 2-Gang

#### Main


|                      |                   |                   |
|----------------------|-------------------|-------------------|
| Range                | Clipsal Solis     |                   |
| Commercial reference | <b>1042PUA-ZW</b> | <b>1042PUA-ZB</b> |
| Product colour       | □ White           | ■ Black           |
| Product type         | Grid and cover    |                   |

#### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Number of switches       | 2                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Dimensions (H × W × D)   | 74 × 148 × 23.5 mm                            |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

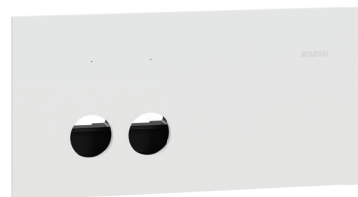

#### Dimensions (mm)

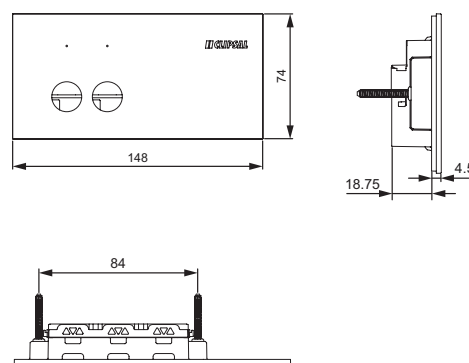

# Switches

## 1043PUA

Switch Grid and Cover Horizontal 3-gang

### Main

|                      |                   |                   |
|----------------------|-------------------|-------------------|
| Range                | Clipsal Solis     |                   |
| Commercial reference | <b>1043PUA-ZW</b> | <b>1043PUA-ZB</b> |
| Product colour       | □ White           | ■ Black           |
| Product type         | Grid and cover    |                   |

### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Number of switches       | 3                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Dimensions (H × W × D)   | 74 × 148 × 23.5 mm                            |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



### Dimensions (mm)

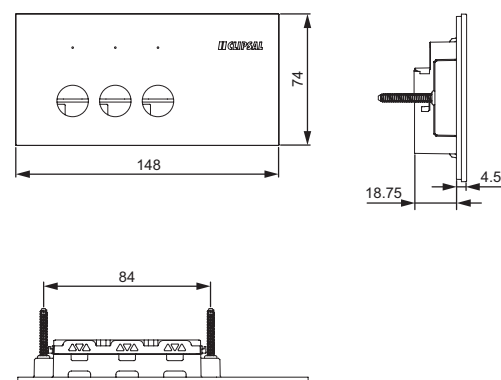

## Switches

### 1044PUA

Switch Grid and Cover Horizontal 4 Gang

#### Main

|                      |                   |                   |
|----------------------|-------------------|-------------------|
| Range                | Clipsal Solis     |                   |
| Commercial reference | <b>1044PUA-ZW</b> | <b>1044PUA-ZB</b> |
| Product colour       | □ White           | ■ Black           |
| Product type         | Grid and cover    |                   |

#### Complementary


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Number of switches       | 4                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 120 mm                                        |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Dimensions (H × W × D)   | 74 × 148 × 23.5 mm                            |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 131 × 54 mm                                   |

#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



#### Dimensions (mm)

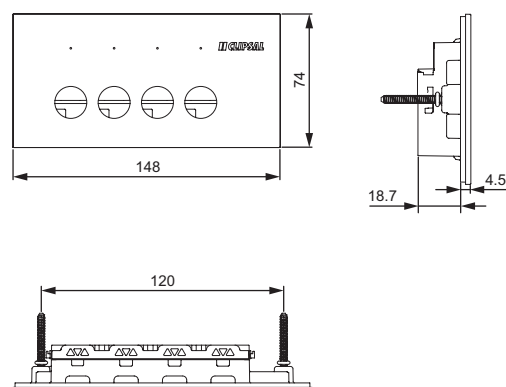

# Switches

## 1043CP

Grid and Cover Horizontal 3 Gang Communication Plate

### Main

|                      |                  |                  |
|----------------------|------------------|------------------|
| Range                | Clipsal Solis    |                  |
| Commercial reference | <b>1043CP-ZW</b> | <b>1043CP-ZB</b> |
| Product colour       | □ White          | ■ Black          |
| Product type         | Grid and cover   |                  |

### Complementary




|                          |                                               |
|--------------------------|-----------------------------------------------|
| Number of switches       | 3                                             |
| Facia material           | Plastic                                       |
| Surface finish           | Matt                                          |
| Surface treatment        | Painted                                       |
| Installation orientation | Horizontal only                               |
| Mounting                 | Flush mounted                                 |
| Mounting type            | Screws                                        |
| Mounting centres         | 84 mm                                         |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |
| Dimensions (H × W × D)   | 74 × 148 mm                                   |
| Cover thickness          | 4.5 mm                                        |
| Cut out (L × H)          | 95 × 54 mm                                    |

### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



### Dimensions (mm)





# Adaptors


## 40RWDA

Rotary Adaptor for Wiser Dimmer + LED

| Main                       |                                 |                                           |
|----------------------------|---------------------------------|-------------------------------------------|
| Range                      | Clipsal Solis                   |                                           |
| Commercial reference       | <b>40RWDA-ZW</b>                | <b>40RWDA-ZB</b>                          |
| Product colour             | <input type="checkbox"/> White  | <input checked="" type="checkbox"/> Black |
| Product type               | Adaptor                         |                                           |
| Complementary              |                                 |                                           |
| Number of switches         | 1                               |                                           |
| Surface finish             | Matt                            |                                           |
| Surface treatment          | Painted                         |                                           |
| Control type               | Rotary knob - Push ON, Push OFF |                                           |
| Mounting type              | Clips                           |                                           |
| Dimensions (H × W × D)     | 51 × 22 × 30 mm                 |                                           |
| Packing Units              |                                 |                                           |
| Unit type of package       | PCE                             |                                           |
| Number of units in package | 1                               |                                           |



Dimensions (mm)

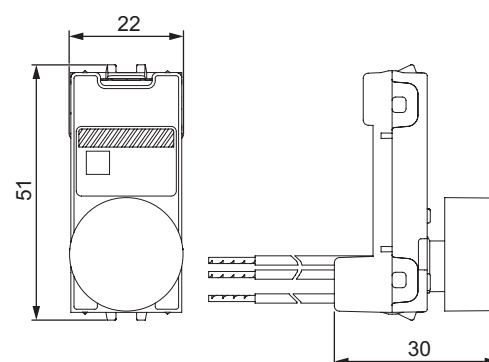

# Adaptors

## 40PWSA

Push Button Adaptor for Wiser Module + LED

### Main

|                      |                                |                                           |
|----------------------|--------------------------------|-------------------------------------------|
| Range                | Clipsal Solis                  |                                           |
| Commercial reference | <b>40PWSA-ZW</b>               | <b>40PWSA-ZB</b>                          |
| Product colour       | <input type="checkbox"/> White | <input checked="" type="checkbox"/> Black |
| Product type         | Adaptor                        |                                           |

### Complementary


|                        |                 |
|------------------------|-----------------|
| Number of switches     | 1               |
| Surface finish         | Matt            |
| Surface treatment      | Painted         |
| Control type           | Push button     |
| Mounting type          | Clips           |
| Dimensions (H × W × D) | 51 × 22 × 23 mm |

### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



### Dimensions (mm)

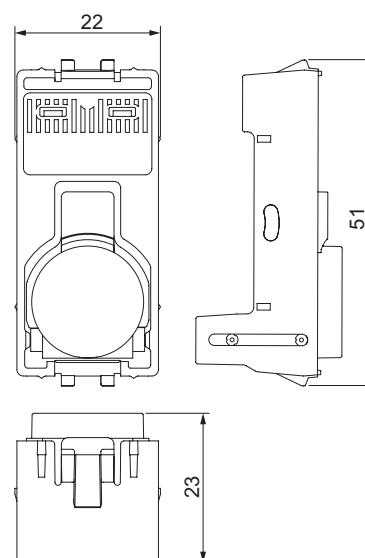

## Adaptors


### 40PA

Push Button Adaptor for SW Mech + LED

| Main                       |                                |                                           |
|----------------------------|--------------------------------|-------------------------------------------|
| Range                      | Clipsal Solis                  |                                           |
| Commercial reference       | 40PA-ZW                        | 40PA-ZB                                   |
| Product colour             | <input type="checkbox"/> White | <input checked="" type="checkbox"/> Black |
| Product type               | Adaptor                        |                                           |
| Complementary              |                                |                                           |
| Number of switches         | 1                              |                                           |
| Surface finish             | Matt                           |                                           |
| Surface treatment          | Painted                        |                                           |
| Control type               | Push button                    |                                           |
| Mounting type              | Clips                          |                                           |
| Dimensions (H × W × D)     | 51 × 22 × 23 mm                |                                           |
| Packing Units              |                                |                                           |
| Unit type of package       | PCE                            |                                           |
| Number of units in package | 1                              |                                           |



Dimensions (mm)

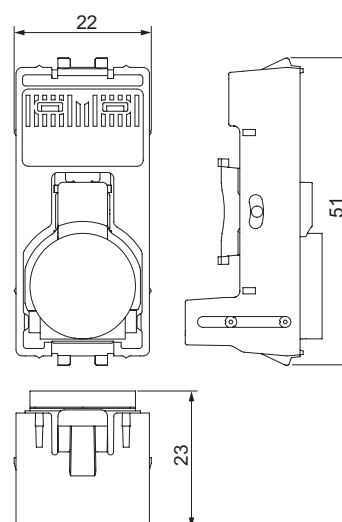

## Adaptors

### 40PA32COOK

Push Button Adaptor Marked Cooker + LED

#### Main

|                      |                                |                                           |
|----------------------|--------------------------------|-------------------------------------------|
| Range                | Clipsal Solis                  |                                           |
| Commercial reference | <b>40PA32COOK-ZW</b>           | <b>40PA32COOK-ZB</b>                      |
| Product colour       | <input type="checkbox"/> White | <input checked="" type="checkbox"/> Black |
| Product type         | Adaptor                        |                                           |

#### Complementary


|                        |                 |
|------------------------|-----------------|
| Number of switches     | 1               |
| Surface finish         | Matt            |
| Surface treatment      | Painted         |
| Control type           | Push button     |
| Mounting type          | Clips           |
| Dimensions (H × W × D) | 51 × 22 × 23 mm |

#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |



#### Dimensions (mm)

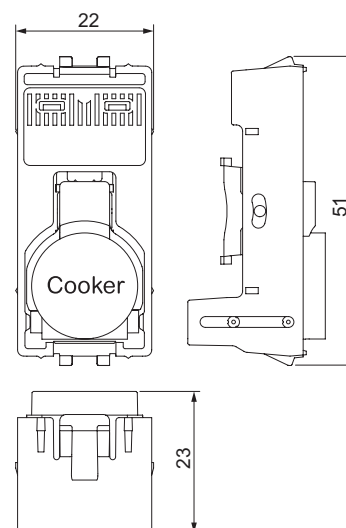

# Clipsal Solis™ T Series





## Sockets

## 1010CSZ

Single Connected Switched Socket (Zigbee)



Download  
**Wiser by SE app**  
Schneider Electric's connected  
technology for homes



## Main

|                      |                        |                   |                   |                   |
|----------------------|------------------------|-------------------|-------------------|-------------------|
| Range                | Clipsal Solis T Series |                   |                   |                   |
| Commercial reference | <b>1010CSZ-WC</b>      | <b>1010CSZ-EA</b> | <b>1010CSZ-BB</b> | <b>1010CSZ-PT</b> |
| Product colour       | □ White                | ■ Ebony           | ■ Brushed Brass   | ■ Platinum        |
| Product type         | Switched socket        |                   |                   |                   |
| Mobile app           | Wiser by SE            |                   |                   |                   |
| Outlet standard      | AS/NZS 3112            |                   |                   |                   |

## Complementary

|                            |                                                    |             |           |             |
|----------------------------|----------------------------------------------------|-------------|-----------|-------------|
| Rated voltage              | 230/240 V AC 50 Hz                                 |             |           |             |
| Rated current              | 10 A                                               |             |           |             |
| Number of outlets          | 1                                                  |             |           |             |
| Number of switches         | 1                                                  |             |           |             |
| Facia material             | Ceramic                                            | Aluminium   | Aluminium | Aluminium   |
| Surface finish             | Matt                                               | Sandblasted | Brushed   | Sandblasted |
| Surface treatment          | PVD*                                               | Anodized    | Anodized  | Anodized    |
| Installation orientation   | Horizontal only                                    |             |           |             |
| Control type               | Push button                                        |             |           |             |
| Protection                 | With shutter                                       |             |           |             |
| Communication network type | Wireless Zigbee (2405...2480 MHz), 10 mW at < 50 m |             |           |             |
| Memory description         | Backup memory - date and time for 6 h              |             |           |             |
| Mounting                   | Flush mounted                                      |             |           |             |
| Mounting type              | Screws                                             |             |           |             |
| Mounting centres           | 84 mm                                              |             |           |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1)      |             |           |             |
| Terminals type             | Screw terminals                                    |             |           |             |
| Terminals capacity         | 4 × 2.5...3 × 4.0 mm <sup>2</sup>                  |             |           |             |
| Dimension (H × W × D)      | 74 × 148 × 66.9 mm                                 |             |           |             |
| Stripping length           | 16 mm                                              |             |           |             |
| Embedded depth             | 64 mm                                              |             |           |             |
| Cover thickness            | 3.9 mm                                             |             |           |             |
| Cut out (L × H)            | 95 × 54 mm                                         |             |           |             |


## Environment

|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|


## Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition

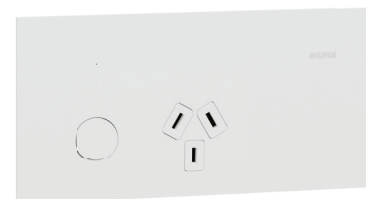

## Dimensions (mm)

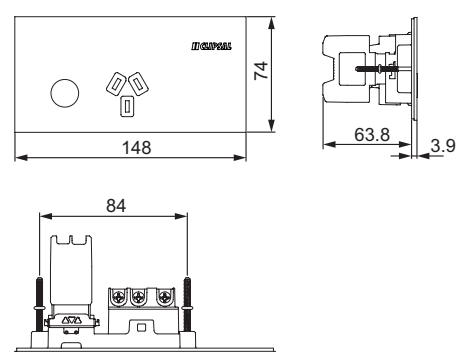

For more detailed information, refer to the Wiser Guides online. Scan the QR code or follow the link:  
[https://www.productinfo.schneider-electric.com/wiser\\_eu/](https://www.productinfo.schneider-electric.com/wiser_eu/)

## Sockets

## 1025


Switched Socket Horizontal Twin 10 A

| Main                       |                                               |             |                 |             |
|----------------------------|-----------------------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series                        |             |                 |             |
| Commercial reference       | 1025-WC                                       | 1025-EA     | 1025-BB         | 1025-PT     |
| Product colour             | □ White                                       | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Switched socket                               |             |                 |             |
| Outlet standard            | AS/NZS 3112                                   |             |                 |             |
| Complementary              |                                               |             |                 |             |
| Rated voltage              | 230/240 V AC 50 Hz                            |             |                 |             |
| Rated current              | 10 A                                          |             |                 |             |
| Number of outlets          | 2                                             |             |                 |             |
| Number of switches         | 2                                             |             |                 |             |
| Facia material             | Ceramic                                       | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                                          | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                                          | Anodized    | Anodized        | Anodized    |
| Installation orientation   | Horizontal only                               |             |                 |             |
| Control type               | Flush rocker                                  |             |                 |             |
| Protection                 | With shutter                                  |             |                 |             |
| Mounting                   | Flush mounted                                 |             |                 |             |
| Mounting type              | Screws                                        |             |                 |             |
| Mounting centres           | 84 mm                                         |             |                 |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |                 |             |
| Terminals type             | Screw terminals                               |             |                 |             |
| Terminals capacity         | 4 × 2.5...3 × 4.0 mm²                         |             |                 |             |
| Dimension (H × W × D)      | 74 × 148 × 27.4 mm                            |             |                 |             |
| Stripping length           | 16 mm                                         |             |                 |             |
| Embedded depth             | 23.5 mm                                       |             |                 |             |
| Cover thickness            | 3.9 mm                                        |             |                 |             |
| Cut out (L × H)            | 95 × 54 mm                                    |             |                 |             |
| Environment                |                                               |             |                 |             |
| Product certifications     | RCM                                           |             |                 |             |
| Packing Units              |                                               |             |                 |             |
| Unit type of package       | PCE                                           |             |                 |             |
| Number of units in package | 1                                             |             |                 |             |

\*Physical Vapor Deposition



## Dimensions (mm)

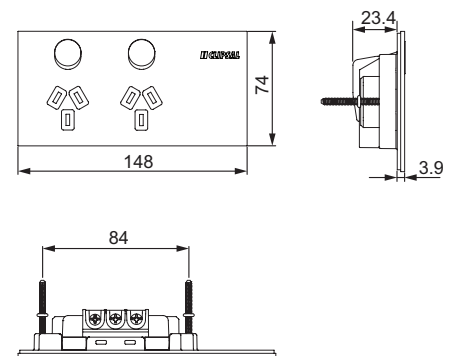

# Sockets

## 1025XUA

Switched Socket Horizontal Twin 1 ExBLANK 10 A

### Main

|                      |                                     |                   |                   |                   |
|----------------------|-------------------------------------|-------------------|-------------------|-------------------|
| Range                | Clipsal Solis T Series              |                   |                   |                   |
| Commercial reference | <b>1025XUA-WC</b>                   | <b>1025XUA-EA</b> | <b>1025XUA-BB</b> | <b>1025XUA-PT</b> |
| Product colour       | □ White                             | ■ Ebony           | ■ Brushed Brass   | ■ Platinum        |
| Product type         | Switched socket with extra aperture |                   |                   |                   |
| Outlet standard      | AS/NZS 3112                         |                   |                   |                   |

### Complementary

|                          |                                               |             |           |             |
|--------------------------|-----------------------------------------------|-------------|-----------|-------------|
| Rated voltage            | 230/240 V AC 50 Hz                            |             |           |             |
| Rated current            | 10 A                                          |             |           |             |
| Number of outlets        | 2                                             |             |           |             |
| Number of switches       | 2                                             |             |           |             |
| Facia material           | Ceramic                                       | Aluminium   | Aluminium | Aluminium   |
| Surface finish           | Matt                                          | Sandblasted | Brushed   | Sandblasted |
| Surface treatment        | PVD*                                          | Anodized    | Anodized  | Anodized    |
| Installation orientation | Horizontal only                               |             |           |             |
| Control type             | Flush rocker                                  |             |           |             |
| Protection               | With shutter                                  |             |           |             |
| Additional function      | Extra aperture                                |             |           |             |
| Mounting                 | Flush mounted                                 |             |           |             |
| Mounting type            | Screws                                        |             |           |             |
| Mounting centres         | 120 mm                                        |             |           |             |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |           |             |
| Terminals type           | Screw terminals                               |             |           |             |
| Terminals capacity       | 4 × 2.5...3 × 4.0 mm <sup>2</sup>             |             |           |             |
| Dimension (H × W × D)    | 74 × 148 × 27.4 mm                            |             |           |             |
| Stripping length         | 16 mm                                         |             |           |             |
| Embedded depth           | 23.5 mm                                       |             |           |             |
| Cover thickness          | 3.9 mm                                        |             |           |             |
| Cut out (L × H)          | 131 × 54 mm                                   |             |           |             |

### Environment

|                        |     |
|------------------------|-----|
| Product certifications | RCM |
|------------------------|-----|


### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition



### Dimensions (mm)

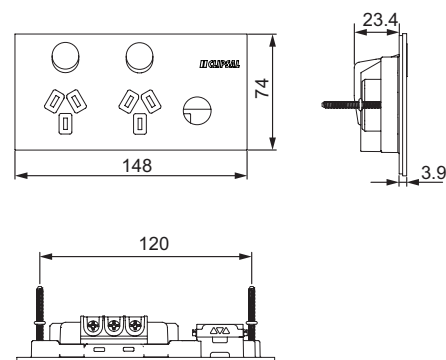

## Sockets

## 1025USBC


Switched Socket Horizontal Twin Type C USB Fast Charger 10 A

| Main                       |                                               |                                           |                                        |                                   |
|----------------------------|-----------------------------------------------|-------------------------------------------|----------------------------------------|-----------------------------------|
| Range                      | Clipsal Solis T Series                        |                                           |                                        |                                   |
| Commercial reference       | 1025USBC-WC                                   | 1025USBC-EA                               | 1025USBC-BB                            | 1025USBC-PT                       |
| Product colour             | <input type="checkbox"/> White                | <input checked="" type="checkbox"/> Ebony | <input type="checkbox"/> Brushed Brass | <input type="checkbox"/> Platinum |
| Product type               | Switched socket with USB                      |                                           |                                        |                                   |
| Outlet standard            | AS/NZS 3112                                   |                                           |                                        |                                   |
| Complementary              |                                               |                                           |                                        |                                   |
| Rated voltage              | 230/240 V AC 50 Hz                            |                                           |                                        |                                   |
| Rated current              | 10 A                                          |                                           |                                        |                                   |
| Number of outlets          | 2                                             |                                           |                                        |                                   |
| Number of switches         | 2                                             |                                           |                                        |                                   |
| Facia material             | Ceramic                                       | Aluminium                                 | Aluminium                              | Aluminium                         |
| Surface finish             | Matt                                          | Sandblasted                               | Brushed                                | Sandblasted                       |
| Surface treatment          | PVD*                                          | Anodized                                  | Anodized                               | Anodized                          |
| Installation orientation   | Horizontal only                               |                                           |                                        |                                   |
| Control type               | Flush rocker                                  |                                           |                                        |                                   |
| Protection                 | With shutter                                  |                                           |                                        |                                   |
| Additional function        | Type C USB                                    |                                           |                                        |                                   |
| Mounting                   | Flush mounted                                 |                                           |                                        |                                   |
| Mounting type              | Screws                                        |                                           |                                        |                                   |
| Mounting centres           | 120 mm                                        |                                           |                                        |                                   |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |                                           |                                        |                                   |
| Terminals type             | Screw terminals                               |                                           |                                        |                                   |
| Terminals capacity         | 4 × 2.5...3 × 4.0 mm²                         |                                           |                                        |                                   |
| Dimension (H × W × D)      | 74 × 148 × 68.9 mm                            |                                           |                                        |                                   |
| Stripping length           | 16 mm                                         |                                           |                                        |                                   |
| Embedded depth             | 60 mm                                         |                                           |                                        |                                   |
| Cover thickness            | 3.9 mm                                        |                                           |                                        |                                   |
| Cut out (L × H)            | 131 × 54 mm                                   |                                           |                                        |                                   |
| Environment                |                                               |                                           |                                        |                                   |
| Product certifications     | RCM                                           |                                           |                                        |                                   |
| Packing Units              |                                               |                                           |                                        |                                   |
| Unit type of package       | PCE                                           |                                           |                                        |                                   |
| Number of units in package | 1                                             |                                           |                                        |                                   |

\*Physical Vapor Deposition



## Dimensions (mm)

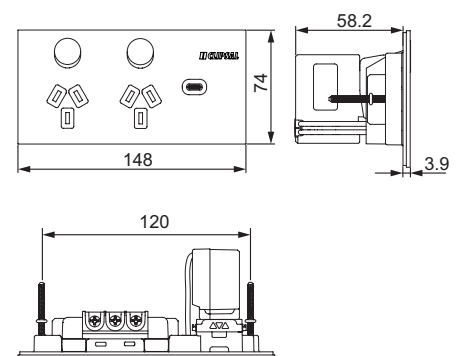

# Switches

## 1041TA


Switch Horizontal 1-gang 10 AX

| Main                       |                                               |             |                 |             |
|----------------------------|-----------------------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series                        |             |                 |             |
| Commercial reference       | 1041TA-WC                                     | 1041TA-EA   | 1041TA-BB       | 1041TA-PT   |
| Product colour             | □ White                                       | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Switch                                        |             |                 |             |
| Switch standard            | AS/NZS 60669                                  |             |                 |             |
| Complementary              |                                               |             |                 |             |
| Rated voltage              | 230/240 V AC 50 Hz                            |             |                 |             |
| Rated current              | 10 AX<br>iLED lamp 100 W                      |             |                 |             |
| M-rating                   | M80                                           |             |                 |             |
| Number of switches         | 1                                             |             |                 |             |
| Facia material             | Ceramic                                       | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                                          | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                                          | Anodized    | Anodized        | Anodized    |
| Installation orientation   | Horizontal only                               |             |                 |             |
| Control type               | Toggle                                        |             |                 |             |
| Mounting                   | Flush mounted                                 |             |                 |             |
| Mounting type              | Screws                                        |             |                 |             |
| Mounting centres           | 84 mm                                         |             |                 |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |                 |             |
| Terminals type             | Screw terminals                               |             |                 |             |
| Terminals capacity         | 4 × 1.5...3 × 2.5 mm²                         |             |                 |             |
| Dimension (H × W × D)      | 74 × 148 × 56 mm                              |             |                 |             |
| Stripping length           | 10 mm                                         |             |                 |             |
| Embedded depth             | 41 mm                                         |             |                 |             |
| Cover thickness            | 3.6 mm                                        |             |                 |             |
| Cut out (L × H)            | 95 × 54 mm                                    |             |                 |             |
| Environment                |                                               |             |                 |             |
| Product certifications     | RCM                                           |             |                 |             |
| Packing Units              |                                               |             |                 |             |
| Unit type of package       | PCE                                           |             |                 |             |
| Number of units in package | 1                                             |             |                 |             |

\*Physical Vapor Deposition



### Dimensions (mm)

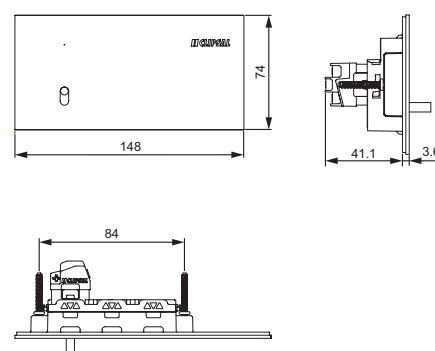



## Switches


## 1042TA

Switch Horizontal 2-gang 10 AX

| Main                       |                                               |             |                 |             |
|----------------------------|-----------------------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series                        |             |                 |             |
| Commercial reference       | 1042TA-WC                                     | 1042TA-EA   | 1042TA-BB       | 1042TA-PT   |
| Product colour             | □ White                                       | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Switch                                        |             |                 |             |
| Switch standard            | AS/NZS 60669                                  |             |                 |             |
| Complementary              |                                               |             |                 |             |
| Rated voltage              | 230/240 V AC 50 Hz                            |             |                 |             |
| Rated current              | 10 AX<br>iLED lamp 100 W                      |             |                 |             |
| M-rating                   | M80                                           |             |                 |             |
| Number of switches         | 2                                             |             |                 |             |
| Facia material             | Ceramic                                       | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                                          | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                                          | Anodized    | Anodized        | Anodized    |
| Installation orientation   | Horizontal only                               |             |                 |             |
| Control type               | Toggle                                        |             |                 |             |
| Mounting                   | Flush mounted                                 |             |                 |             |
| Mounting type              | Screws                                        |             |                 |             |
| Mounting centres           | 84 mm                                         |             |                 |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |                 |             |
| Terminals type             | Screw terminals                               |             |                 |             |
| Terminals capacity         | 4 × 1.5...3 × 2.5 mm <sup>2</sup>             |             |                 |             |
| Dimension (H × W × D)      | 74 × 148 × 56 mm                              |             |                 |             |
| Stripping length           | 10 mm                                         |             |                 |             |
| Embedded depth             | 41 mm                                         |             |                 |             |
| Cover thickness            | 3.6 mm                                        |             |                 |             |
| Cut out (L × H)            | 95 × 54 mm                                    |             |                 |             |
| Standards                  | AS/NZS 60669                                  |             |                 |             |
| Environment                |                                               |             |                 |             |
| Product certifications     | RCM                                           |             |                 |             |
| Packing Units              |                                               |             |                 |             |
| Unit type of package       | PCE                                           |             |                 |             |
| Number of units in package | 1                                             |             |                 |             |



## Dimensions (mm)

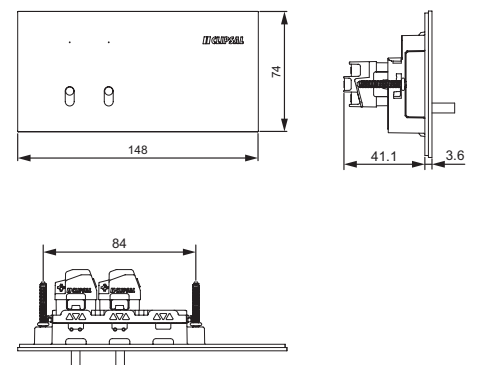

# Switches

## 1043TA


Switch Horizontal 3-gang 10 AX

| Main                       |                                               |             |                 |             |
|----------------------------|-----------------------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series                        |             |                 |             |
| Commercial reference       | 1043TA-WC                                     | 1043TA-EA   | 1043TA-BB       | 1043TA-PT   |
| Product colour             | □ White                                       | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Switch                                        |             |                 |             |
| Assembly type              | Complete product                              |             |                 |             |
| Switch standard            | AS/NZS 60669                                  |             |                 |             |
| Complementary              |                                               |             |                 |             |
| Rated voltage              | 230/240 V AC 50 Hz                            |             |                 |             |
| Rated current              | 10 AX<br>iLED lamp 100 W                      |             |                 |             |
| M-rating                   | M80                                           |             |                 |             |
| Number of switches         | 3                                             |             |                 |             |
| Facia material             | Ceramic                                       | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                                          | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                                          | Anodized    | Anodized        | Anodized    |
| Installation orientation   | Horizontal only                               |             |                 |             |
| Control type               | Toggle                                        |             |                 |             |
| Mounting                   | Flush mounted                                 |             |                 |             |
| Mounting type              | Screws                                        |             |                 |             |
| Mounting centres           | 84 mm                                         |             |                 |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |                 |             |
| Terminals type             | Screw terminals                               |             |                 |             |
| Terminals capacity         | 4 × 1.5...3 × 2.5 mm²                         |             |                 |             |
| Dimension (H × W × D)      | 74 × 148 × 56 mm                              |             |                 |             |
| Stripping length           | 10 mm                                         |             |                 |             |
| Embedded depth             | 41 mm                                         |             |                 |             |
| Cover thickness            | 3.6 mm                                        |             |                 |             |
| Cut out (L × H)            | 95 × 54 mm                                    |             |                 |             |
| Environment                |                                               |             |                 |             |
| Product certifications     | RCM                                           |             |                 |             |
| Packing Units              |                                               |             |                 |             |
| Unit type of package       | PCE                                           |             |                 |             |
| Number of units in package | 1                                             |             |                 |             |

\*Physical Vapor Deposition



### Dimensions (mm)

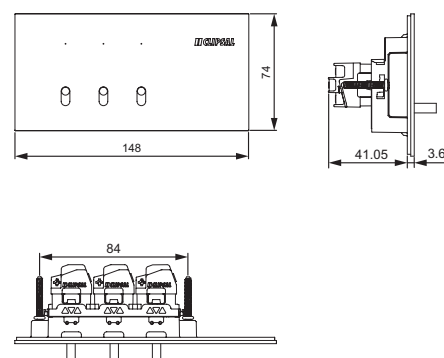

## Switches

## 1044TA


Switch Horizontal 4-gang 10 AX

| Main                       |                                               |             |                 |             |
|----------------------------|-----------------------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series                        |             |                 |             |
| Commercial reference       | 1044TA-WC                                     | 1044TA-EA   | 1044TA-BB       | 1044TA-PT   |
| Product colour             | □ White                                       | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Switch                                        |             |                 |             |
| Switch standard            | AS/NZS 60669                                  |             |                 |             |
| Complementary              |                                               |             |                 |             |
| Rated voltage              | 230/240 V AC 50 Hz                            |             |                 |             |
| Rated current              | 10 AX<br>iLED lamp 100 W                      |             |                 |             |
| M-rating                   | M80                                           |             |                 |             |
| Number of switches         | 4                                             |             |                 |             |
| Facia material             | Ceramic                                       | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                                          | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                                          | Anodized    | Anodized        | Anodized    |
| Installation orientation   | Horizontal only                               |             |                 |             |
| Control type               | Toggle                                        |             |                 |             |
| Mounting                   | Flush mounted                                 |             |                 |             |
| Mounting type              | Screws                                        |             |                 |             |
| Mounting centres           | 120 mm                                        |             |                 |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |                 |             |
| Terminals type             | Screw terminals                               |             |                 |             |
| Terminals capacity         | 4 × 1.5...3 × 2.5 mm²                         |             |                 |             |
| Dimension (H × W × D)      | 74 × 148 × 56 mm                              |             |                 |             |
| Stripping length           | 10 mm                                         |             |                 |             |
| Embedded depth             | 41 mm                                         |             |                 |             |
| Cover thickness            | 3.6 mm                                        |             |                 |             |
| Cut out (L × H)            | 131 × 54 mm                                   |             |                 |             |
| Environment                |                                               |             |                 |             |
| Product certifications     | RCM                                           |             |                 |             |
| Packing Units              |                                               |             |                 |             |
| Unit type of package       | PCE                                           |             |                 |             |
| Number of units in package | 1                                             |             |                 |             |

\*Physical Vapor Deposition



## Dimensions (mm)

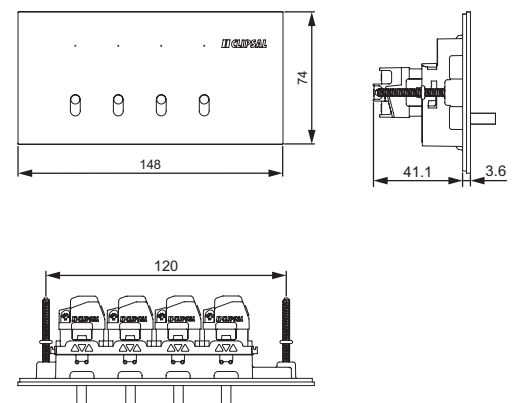

# Switches

## 1041TUA

Switch Grid and Cover Horizontal 1-gang

### Main

|                      |                        |                   |                   |                   |
|----------------------|------------------------|-------------------|-------------------|-------------------|
| Range                | Clipsal Solis T Series |                   |                   |                   |
| Commercial reference | <b>1041TUA-WC</b>      | <b>1041TUA-EA</b> | <b>1041TUA-BB</b> | <b>1041TUA-PT</b> |
| Product colour       | □ White                | ■ Ebony           | ■ Brushed Brass   | ■ Platinum        |
| Product type         | Grid and cover         |                   |                   |                   |

### Complementary

|                          |                                               |             |           |             |
|--------------------------|-----------------------------------------------|-------------|-----------|-------------|
| Number of switches       | 1                                             |             |           |             |
| Facia material           | Ceramic                                       | Aluminium   | Aluminium | Aluminium   |
| Surface finish           | Matt                                          | Sandblasted | Brushed   | Sandblasted |
| Surface treatment        | PVD*                                          | Anodized    | Anodized  | Anodized    |
| Installation orientation | Horizontal only                               |             |           |             |
| Mounting                 | Flush mounted                                 |             |           |             |
| Mounting type            | Screws                                        |             |           |             |
| Mounting centres         | 84 mm                                         |             |           |             |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |           |             |
| Dimension (H × W × D)    | 74 × 148 × 22.6 mm                            |             |           |             |
| Cover thickness          | 3.6 mm                                        |             |           |             |
| Cut out (L × H)          | 95 × 54 mm                                    |             |           |             |


### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition



### Dimensions (mm)

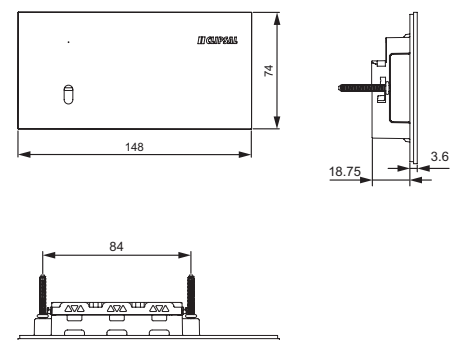

## Switches

## 1042TUA

Switch Grid and Cover Horizontal 2-gang

## Main

|                      |                        |                   |                   |                   |
|----------------------|------------------------|-------------------|-------------------|-------------------|
| Range                | Clipsal Solis T Series |                   |                   |                   |
| Commercial reference | <b>1042TUA-WC</b>      | <b>1042TUA-EA</b> | <b>1042TUA-BB</b> | <b>1042TUA-PT</b> |
| Product colour       | □ White                | ■ Ebony           | ■ Brushed Brass   | ■ Platinum        |
| Product type         | Grid and cover         |                   |                   |                   |

## Complementary

|                          |                                               |             |           |             |
|--------------------------|-----------------------------------------------|-------------|-----------|-------------|
| Number of switches       | 2                                             |             |           |             |
| Facia material           | Ceramic                                       | Aluminium   | Aluminium | Aluminium   |
| Surface finish           | Matt                                          | Sandblasted | Brushed   | Sandblasted |
| Surface treatment        | PVD*                                          | Anodized    | Anodized  | Anodized    |
| Installation orientation | Horizontal only                               |             |           |             |
| Mounting                 | Flush mounted                                 |             |           |             |
| Mounting type            | Screws                                        |             |           |             |
| Mounting centres         | 84 mm                                         |             |           |             |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |           |             |
| Dimension (H × W × D)    | 74 × 148 × 22.6 mm                            |             |           |             |
| Cover thickness          | 3.6 mm                                        |             |           |             |
| Cut out (L × H)          | 95 × 54 mm                                    |             |           |             |


## Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition



## Dimensions (mm)

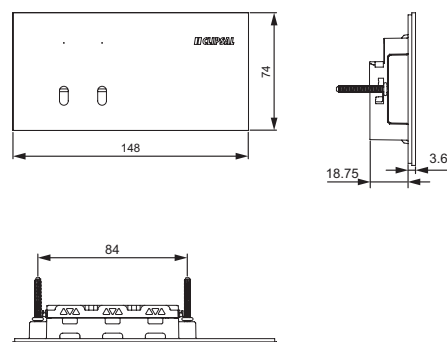


# Switches

## 1043TUA


Switch Grid and Cover Horizontal 3-gang

| Main                       |                                               |             |                 |             |
|----------------------------|-----------------------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series                        |             |                 |             |
| Commercial reference       | 1043TUA-WC                                    | 1043TUA-EA  | 1043TUA-BB      | 1043TUA-PT  |
| Product colour             | □ White                                       | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Grid and cover                                |             |                 |             |
| Complementary              |                                               |             |                 |             |
| Number of switches         | 3                                             |             |                 |             |
| Facia material             | Ceramic                                       | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                                          | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                                          | Anodized    | Anodized        | Anodized    |
| Installation orientation   | Horizontal only                               |             |                 |             |
| Mounting                   | Flush mounted                                 |             |                 |             |
| Mounting type              | Screws                                        |             |                 |             |
| Mounting centres           | 84 mm                                         |             |                 |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |                 |             |
| Dimension (H × W × D)      | 74 × 148 × 22.6 mm                            |             |                 |             |
| Cover thickness            | 3.6 mm                                        |             |                 |             |
| Cut out (L × H)            | 95 × 54 mm                                    |             |                 |             |
| Packing Units              |                                               |             |                 |             |
| Unit type of package       | PCE                                           |             |                 |             |
| Number of units in package | 1                                             |             |                 |             |

\*Physical Vapor Deposition

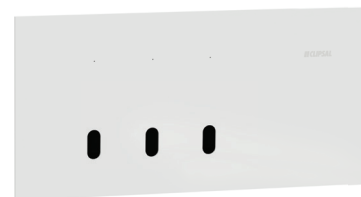

### Dimensions (mm)

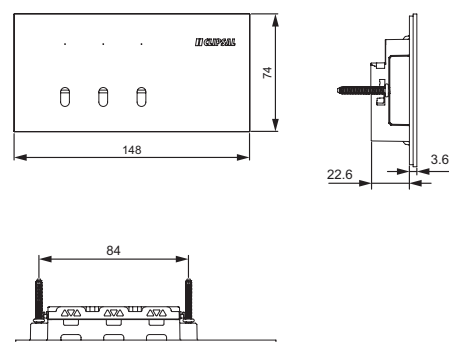



## Switches

## 1044TUA

Switch Grid and Cover Horizontal 4-gang

## Main

|                      |                        |                   |                   |                   |
|----------------------|------------------------|-------------------|-------------------|-------------------|
| Range                | Clipsal Solis T Series |                   |                   |                   |
| Commercial reference | <b>1044TUA-WC</b>      | <b>1044TUA-EA</b> | <b>1044TUA-BB</b> | <b>1044TUA-PT</b> |
| Product colour       | □ White                | ■ Ebony           | ■ Brushed Brass   | ■ Platinum        |
| Product type         | Grid and cover         |                   |                   |                   |


## Complementary

|                          |                                               |             |           |             |
|--------------------------|-----------------------------------------------|-------------|-----------|-------------|
| Number of switches       | 4                                             |             |           |             |
| Facia material           | Ceramic                                       | Aluminium   | Aluminium | Aluminium   |
| Surface finish           | Matt                                          | Sandblasted | Brushed   | Sandblasted |
| Surface treatment        | PVD*                                          | Anodized    | Anodized  | Anodized    |
| Installation orientation | Horizontal only                               |             |           |             |
| Mounting                 | Flush mounted                                 |             |           |             |
| Mounting type            | Screws                                        |             |           |             |
| Mounting centres         | 120 mm                                        |             |           |             |
| Screwdriver              | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |           |             |
| Dimension (H × W × D)    | 74 × 148 × 22.6 mm                            |             |           |             |
| Cover thickness          | 3.6 mm                                        |             |           |             |
| Cut out (L × H)          | 131 × 54 mm                                   |             |           |             |


## Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition

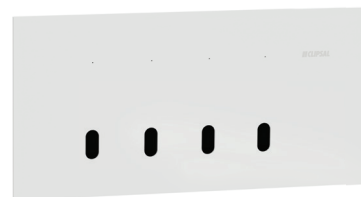

## Dimensions (mm)

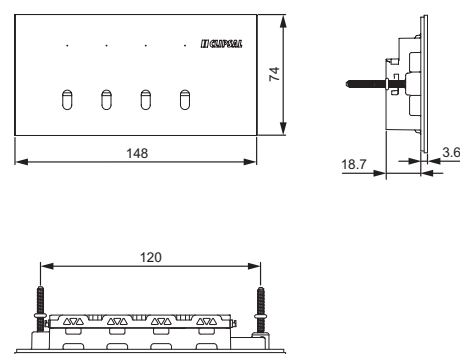


# Switches

## 1043CP


Grid and Cover Horizontal 3-gang Communication Plate

| Main                       |                                               |             |                 |             |
|----------------------------|-----------------------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series                        |             |                 |             |
| Commercial reference       | 1043CP-WC                                     | 1043CP-EA   | 1043CP-BB       | 1043CP-PT   |
| Product colour             | □ White                                       | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Grid and cover                                |             |                 |             |
| Complementary              |                                               |             |                 |             |
| Number of switches         | 3                                             |             |                 |             |
| Facia material             | Ceramic                                       | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                                          | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                                          | Anodized    | Anodized        | Anodized    |
| Installation orientation   | Horizontal only                               |             |                 |             |
| Mounting                   | Flush mounted                                 |             |                 |             |
| Mounting type              | Screws                                        |             |                 |             |
| Mounting centres           | 84 mm                                         |             |                 |             |
| Screwdriver                | Philips No. 2 (PH2), square drive No. 1 (SQ1) |             |                 |             |
| Dimension (H × W × D)      | 74 × 148 × 22.6 mm                            |             |                 |             |
| Cover thickness            | 3.6 mm                                        |             |                 |             |
| Cut out (L × H)            | 95 × 54 mm                                    |             |                 |             |
| Packing Units              |                                               |             |                 |             |
| Unit type of package       | PCE                                           |             |                 |             |
| Number of units in package | 1                                             |             |                 |             |

\*Physical Vapor Deposition

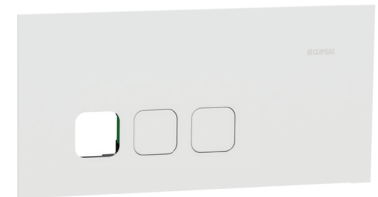

### Dimensions (mm)

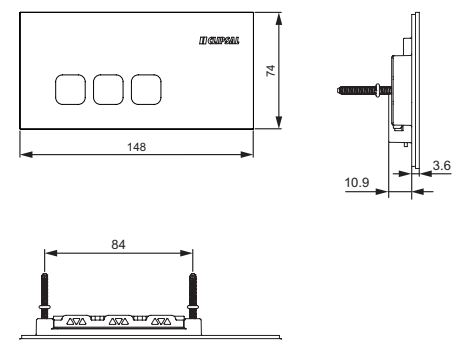

## Adaptors

### 40TWSA

Toggle Adaptor for Wiser Module + LED

#### Main

|                      |                        |                  |                  |                  |
|----------------------|------------------------|------------------|------------------|------------------|
| Range                | Clipsal Solis T Series |                  |                  |                  |
| Commercial reference | <b>40TWSA-WC</b>       | <b>40TWSA-EA</b> | <b>40TWSA-BB</b> | <b>40TWSA-PT</b> |
| Product colour       | □ White                | ■ Ebony          | ■ Brushed Brass  | ■ Platinum       |
| Product type         | Adaptor                |                  |                  |                  |

#### Complementary

|                       |                 |             |           |             |
|-----------------------|-----------------|-------------|-----------|-------------|
| Number of switches    | 1               |             |           |             |
| Facia material        | Ceramic         | Aluminium   | Aluminium | Aluminium   |
| Surface finish        | Matt            | Sandblasted | Brushed   | Sandblasted |
| Surface treatment     | PVD*            | Anodized    | Anodized  | Anodized    |
| Control type          | Toggle          |             |           |             |
| Mounting type         | Clips           |             |           |             |
| Dimension (H × W × D) | 51 × 22 × 30 mm |             |           |             |


#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition



#### Dimensions (mm)

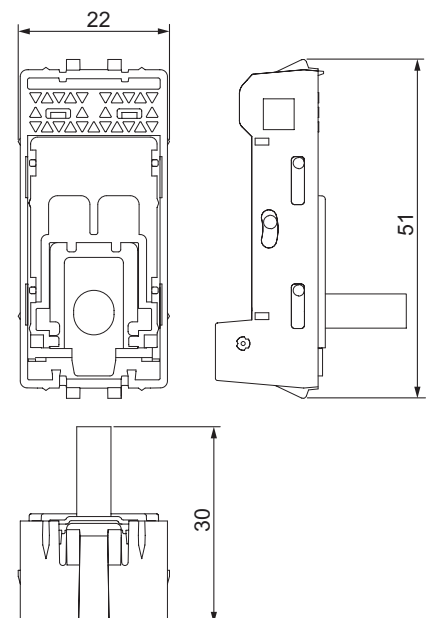

## Adaptors

### 40TA

Toggle Adaptor for SW Mech + LED

#### Main

|                      |                        |                |                 |                |
|----------------------|------------------------|----------------|-----------------|----------------|
| Range                | Clipsal Solis T Series |                |                 |                |
| Commercial reference | <b>40TA-WC</b>         | <b>40TA-EA</b> | <b>40TA-BB</b>  | <b>40TA-PT</b> |
| Product colour       | □ White                | ■ Ebony        | ■ Brushed Brass | ■ Platinum     |
| Product type         | Adaptor                |                |                 |                |

#### Complementary

|                       |                 |             |           |             |
|-----------------------|-----------------|-------------|-----------|-------------|
| Number of switches    | 1               |             |           |             |
| Facia material        | Ceramic         | Aluminium   | Aluminium | Aluminium   |
| Surface finish        | Matt            | Sandblasted | Brushed   | Sandblasted |
| Surface treatment     | PVD*            | Anodized    | Anodized  | Anodized    |
| Control type          | Toggle          |             |           |             |
| Mounting type         | Clips           |             |           |             |
| Dimension (H × W × D) | 51 × 22 × 30 mm |             |           |             |


#### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition



#### Dimensions (mm)

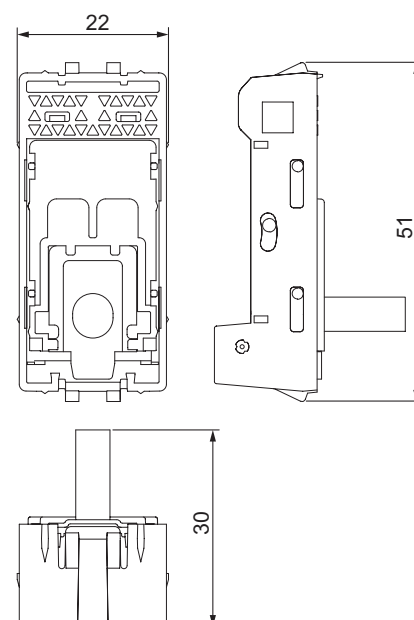

## Adaptors

### 40RWDA


Rotary Adaptor for Wiser Dimmer + LED

| Main                       |                                 |             |                 |             |
|----------------------------|---------------------------------|-------------|-----------------|-------------|
| Range                      | Clipsal Solis T Series          |             |                 |             |
| Commercial reference       | 40RWDA-WC                       | 40RWDA-EA   | 40RWDA-BB       | 40RWDA-PT   |
| Product colour             | □ White                         | ■ Ebony     | ■ Brushed Brass | ■ Platinum  |
| Product type               | Adaptor                         |             |                 |             |
| Complementary              |                                 |             |                 |             |
| Number of switches         | 1                               |             |                 |             |
| Facia material             | Ceramic                         | Aluminium   | Aluminium       | Aluminium   |
| Surface finish             | Matt                            | Sandblasted | Brushed         | Sandblasted |
| Surface treatment          | PVD*                            | Anodized    | Anodized        | Anodized    |
| Control type               | Rotary Knob - Push ON, Push OFF |             |                 |             |
| Mounting type              | Clips                           |             |                 |             |
| Dimension (H × W × D)      | 51 × 22 × 30 mm                 |             |                 |             |
| Packing Units              |                                 |             |                 |             |
| Unit type of package       | PCE                             |             |                 |             |
| Number of units in package | 1                               |             |                 |             |

\*Physical Vapor Deposition



Dimensions (mm)

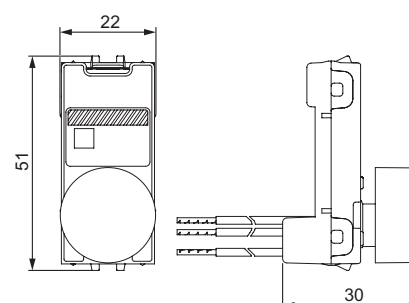

# Adaptors

## 40PWSA

Push Button Adaptor for Wiser Module + LED

### Main

|                      |                        |                  |                  |                  |
|----------------------|------------------------|------------------|------------------|------------------|
| Range                | Clipsal Solis T Series |                  |                  |                  |
| Commercial reference | <b>40PWSA-WC</b>       | <b>40PWSA-EA</b> | <b>40PWSA-BB</b> | <b>40PWSA-PT</b> |
| Product colour       | □ White                | ■ Ebony          | ■ Brushed Brass  | ■ Platinum       |
| Product type         | Adaptor                |                  |                  |                  |

### Complementary

|                       |                 |             |           |             |
|-----------------------|-----------------|-------------|-----------|-------------|
| Number of switches    | 1               |             |           |             |
| Facia material        | Ceramic         | Aluminium   | Aluminium | Aluminium   |
| Surface finish        | Matt            | Sandblasted | Brushed   | Sandblasted |
| Surface treatment     | PVD*            | Anodized    | Anodized  | Anodized    |
| Control type          | Push button     |             |           |             |
| Mounting type         | Clips           |             |           |             |
| Dimension (H × W × D) | 51 × 22 × 23 mm |             |           |             |


### Packing Units

|                            |     |
|----------------------------|-----|
| Unit type of package       | PCE |
| Number of units in package | 1   |

\*Physical Vapor Deposition



### Dimensions (mm)

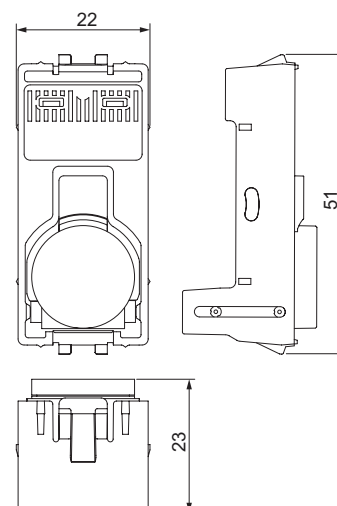



## Adaptors

### 40PA32COOK


Push Button Adaptor Marked Cooker + LED

| Main                       |                                |                                           |                                        |                                   |
|----------------------------|--------------------------------|-------------------------------------------|----------------------------------------|-----------------------------------|
| Range                      | Clipsal Solis T Series         |                                           |                                        |                                   |
| Commercial reference       | 40PA32COOK-WC                  | 40PA32COOK-EA                             | 40PA32COOK-BB                          | 40PA32COOK-PT                     |
| Product colour             | <input type="checkbox"/> White | <input checked="" type="checkbox"/> Ebony | <input type="checkbox"/> Brushed Brass | <input type="checkbox"/> Platinum |
| Product type               | Adaptor                        |                                           |                                        |                                   |
| Complementary              |                                |                                           |                                        |                                   |
| Number of switches         | 1                              |                                           |                                        |                                   |
| Facia material             | Ceramic                        | Aluminium                                 | Aluminium                              | Aluminium                         |
| Surface finish             | Matt                           | Sandblasted                               | Brushed                                | Sandblasted                       |
| Surface treatment          | PVD*                           | Anodized                                  | Anodized                               | Anodized                          |
| Control type               | Push button                    |                                           |                                        |                                   |
| Mounting type              | Clips                          |                                           |                                        |                                   |
| Dimension (H × W × D)      | 51 × 22 × 23 mm                |                                           |                                        |                                   |
| Packing Units              |                                |                                           |                                        |                                   |
| Unit type of package       | PCE                            |                                           |                                        |                                   |
| Number of units in package | 1                              |                                           |                                        |                                   |

\*Physical Vapor Deposition



### Dimensions (mm)

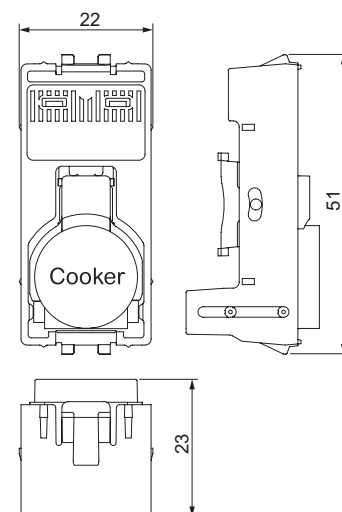



# Mounting Accessories

# Mounting Accessories


## 154C4

Clip 120 mm mounting wall board 10 mm

| Main                       |                                |
|----------------------------|--------------------------------|
| Range                      | Clipsal - Mounting Accessories |
| Commercial reference       | <b>154C4</b>                   |
| Product type               | 4 Gang C-clip                  |
| Complementary              |                                |
| Material                   | Steel                          |
| Surface treatment          | Galvanized                     |
| Installation orientation   | Horizontal only                |
| Mounting type              | Screws (not supplied)          |
| Mounting centres           | 120 mm                         |
| Net weight                 | 26.5 g                         |
| Dimension (H × W × D)      | 156 × 55.5 × 18 mm             |
| Packaging Units            |                                |
| Unit type of package       | PCE                            |
| Number of units in package | 1                              |




Dimensions (mm)

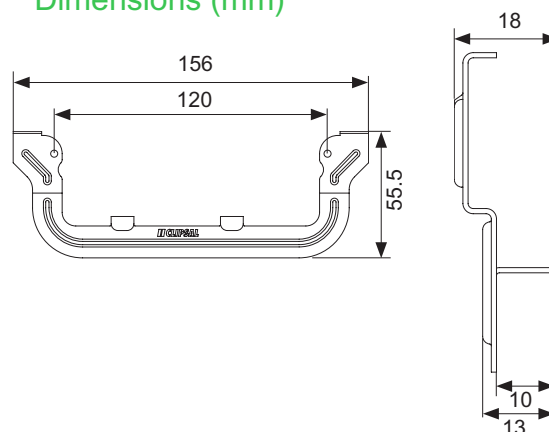


## 155PRMU4

Bracket plaster 120 mm recessed mount

| Main                       |                                |
|----------------------------|--------------------------------|
| Range                      | Clipsal - Mounting Accessories |
| Commercial reference       | <b>155PRMU4</b>                |
| Product type               | 2 Gang/4 Gang plaster bracket  |
| Complementary              |                                |
| Material                   | Steel                          |
| Surface treatment          | Galvanized                     |
| Installation orientation   | Horizontal only                |
| Mounting type              | Screws (not supplied)          |
| Mounting centres           | 84 or 120 mm                   |
| Net weight                 | 152.5 g                        |
| Dimensions (H × W × D)     | 150 × 240 × 10 mm              |
| Packaging Units            |                                |
| Unit type of package       | PCE                            |
| Number of units in package | 1                              |



Dimensions (mm)

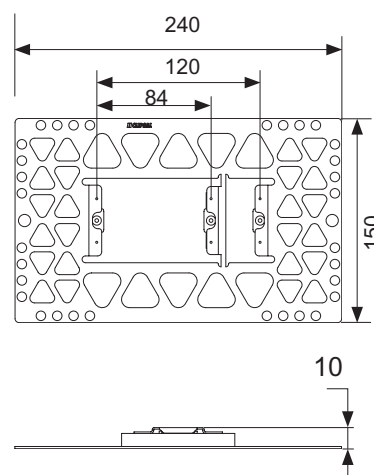


## Mounting Accessories


### 155U4

Bracket metal 120 mm mounting stud

| Main                       |                                |
|----------------------------|--------------------------------|
| Range                      | Clipsal - Mounting Accessories |
| Commercial reference       | <b>155U4</b>                   |
| Product type               | 2 Gang/4 Gang stud bracket     |
| Complementary              |                                |
| Material                   | Steel                          |
| Surface treatment          | Galvanized                     |
| Installation orientation   | Horizontal only                |
| Mounting type              | Screws/nails (not supplied)    |
| Mounting centres           | 84 or 120 mm                   |
| Net weight                 | 73 g                           |
| Dimensions (H × W × D)     | 170 × 76 × 38 mm               |
| Packaging Units            |                                |
| Unit type of package       | PCE                            |
| Number of units in package | 1                              |

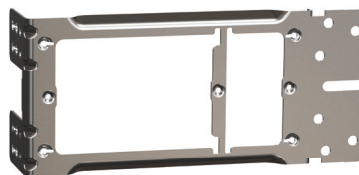

Dimensions (mm)

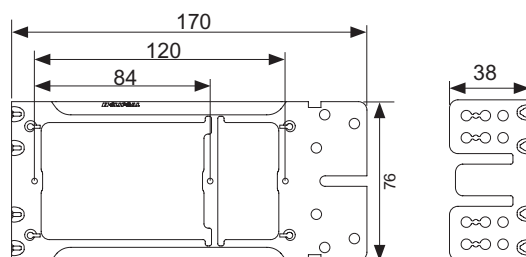


### 157PRM4

Wall box 120 mm recessed mount

| Main                       |                                |
|----------------------------|--------------------------------|
| Range                      | Clipsal - Mounting Accessories |
| Commercial reference       | <b>157PRM4</b>                 |
| Product type               | 4 Gang wall box                |
| Product colour             | Black                          |
| Complementary              |                                |
| Material                   | Plastic                        |
| Installation orientation   | Horizontal only                |
| Mounting centres           | 120 mm                         |
| Net weight                 | 87 g                           |
| Dimensions (H × W × D)     | 136 × 61.5 × 50 mm             |
| Packaging Units            |                                |
| Unit type of package       | PCE                            |
| Number of units in package | 1                              |



Dimensions (mm)

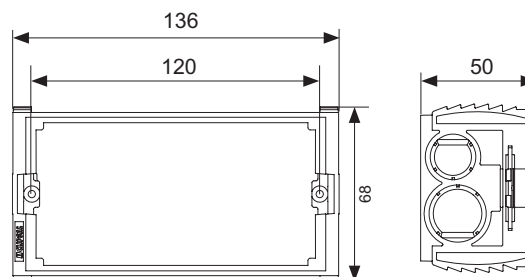

## Mounting Accessories


### 90BD3-BK

Insulating deep shroud 84 mm

| Main                       |                                |
|----------------------------|--------------------------------|
| Range                      | Clipsal - Mounting Accessories |
| Commercial reference       | <b>90BD3-BK</b>                |
| Product colour             | Black                          |
| Product type               | 3 Gang insulating shroud       |
| Complementary              |                                |
| Material                   | Plastic                        |
| Installation orientation   | Horizontal only                |
| Mounting type              | Clips                          |
| Mounting centres           | 84 mm                          |
| Net weight                 | 25 g                           |
| Dimensions (H × W × D)     | 94 × 60.5 × 60.5 mm            |
| Packaging Units            |                                |
| Unit type of package       | PCE                            |
| Number of units in package | 1                              |




#### Dimensions (mm)

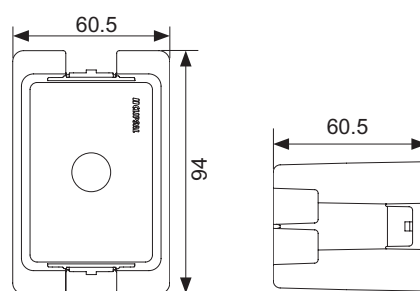


### 90BD4-BK

Insulating deep shroud 120 mm

| Main                       |                                |
|----------------------------|--------------------------------|
| Range                      | Clipsal - Mounting Accessories |
| Commercial reference       | <b>90BD4-BK</b>                |
| Product colour             | Black                          |
| Product type               | 4 Gang insulating shroud       |
| Complementary              |                                |
| Material                   | Plastic                        |
| Installation orientation   | Horizontal only                |
| Mounting type              | Clips                          |
| Mounting centres           | 120 mm                         |
| Net weight                 | 28 g                           |
| Dimensions (H × W × D)     | 126 × 60.5 × 60.5 mm           |
| Packaging Units            |                                |
| Unit type of package       | PCE                            |
| Number of units in package | 1                              |




#### Dimensions (mm)

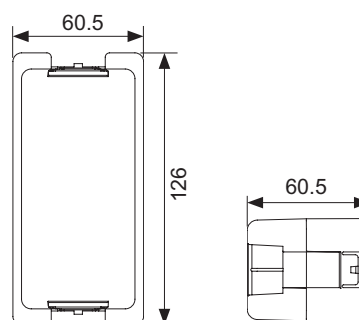


# Cut-out standards for Solis and Solis T Series

## Solis and Solis T Series

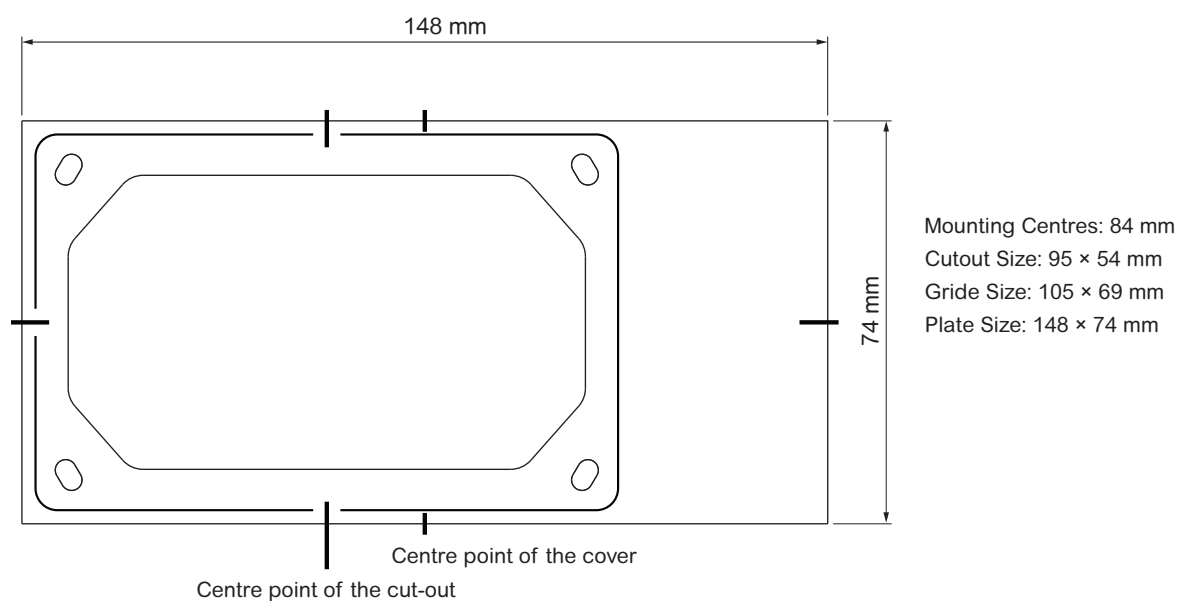

**Note:** The products using this template have an off-centre cut-out design when compared to the front cover. This needs to be considered when installing the product on the left-hand vs right-hand side of the doorway or if trying to centre the distance of the front cover to a reference point on the wall.

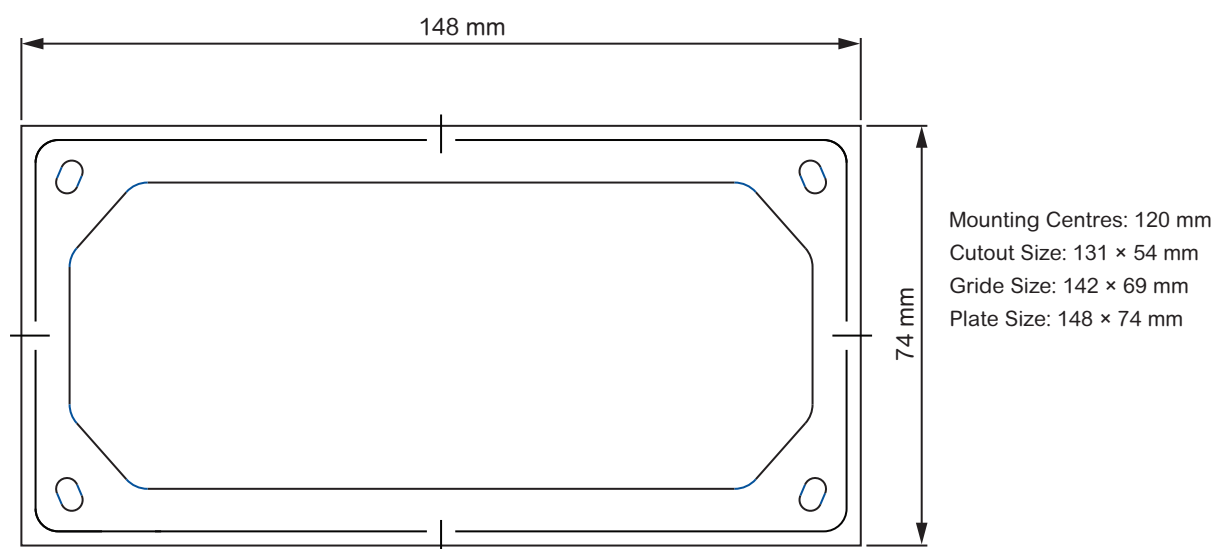



# Solis and Solis T Series Adaptor Compatibility Chart

| Cat. No.       | Push Button Adaptor<br>Marked Cooker + LED<br>40PA32COOK                          | Push Button Adaptor<br>for SW Mech + LED<br>40PA                                  | Push Button Adaptor<br>for Wiser Module + LED<br>40PWSA                           | Rotary Adaptor for<br>Wiser Dimmer + LED<br>40RWDA                                 | Toggle Adaptor for SW<br>Mech + LED<br>40TA                                         | Toggle Adaptor for<br>Wiser Module + LED<br>40TWSA                                  |
|----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                |  |  |  |  |  |  |
| 40M            | No                                                                                | Yes                                                                               | No                                                                                | No                                                                                 | Yes                                                                                 | No                                                                                  |
| 40USM          | No                                                                                | Yes                                                                               | No                                                                                | No                                                                                 | Yes                                                                                 | No                                                                                  |
| 40MBPRL-VW     | No                                                                                | Yes                                                                               | No                                                                                | No                                                                                 | Yes                                                                                 | No                                                                                  |
| 40MI           | No                                                                                | Yes                                                                               | No                                                                                | No                                                                                 | Yes                                                                                 | No                                                                                  |
| 40M32-VW       | Yes                                                                               | Yes                                                                               | No                                                                                | No                                                                                 | Yes                                                                                 | No                                                                                  |
| 40MD20         | Yes                                                                               | Yes                                                                               | No                                                                                | No                                                                                 | Yes                                                                                 | No                                                                                  |
| 41E10PBSWMZ-VW | No                                                                                | No                                                                                | Yes, use with<br>Wiser Hub                                                        | No                                                                                 | No                                                                                  | Yes, use with<br>Wiser Hub                                                          |
| 41E2PBSWMZ-VW  | No                                                                                | No                                                                                | Yes, use with<br>Wiser Hub                                                        | No                                                                                 | No                                                                                  | Yes, use with<br>Wiser Hub                                                          |
| 41ECSFWMZ-VW   | No                                                                                | No                                                                                | Yes, use with<br>Wiser Hub                                                        | No                                                                                 | No                                                                                  | Yes, use with<br>Wiser Hub                                                          |
| 41EPBDWCLMZ-VW | No                                                                                | No                                                                                | Yes, use with<br>Wiser Hub                                                        | Yes, use with<br>Wiser Hub                                                         | No                                                                                  | Yes, use with<br>Wiser Hub                                                          |

# Solis Mounting Compatibility Chart

| Cat. No.                                                                                             | Wall Clips |       |       |       | Wall Brackets and Plates |        |         |          |     |       |      |      |       |        |         |         | Wall Boxes |                  |         |                  |                  |                  |                  |                  | Shrouds          |                  |                  |       |
|------------------------------------------------------------------------------------------------------|------------|-------|-------|-------|--------------------------|--------|---------|----------|-----|-------|------|------|-------|--------|---------|---------|------------|------------------|---------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------|
|                                                                                                      | 154        | 154C4 | 154RM | 154/1 | 155P                     | 155PRM | 155PRM4 | 155PRMU4 | 155 | 155U4 | 155F | 155N | 155NA | 155NAR | PDL144P | PDL144M | PDL144M4   | 157/1P           | 157PRM4 | 157/1PRM         | 157/1PRMD        | 157/1            | 164/1            | PDL140C          | PDL140F          | PDL141C          | 90BD3            | 90BD4 |
| 1041TA, 1042TA, 1043TA, 1041TUA, 1042TUA, 1043TUA, 1041PA, 1042PA, 1043PA, 1041PUA, 1042PUA, 1043PUA | Yes        | No    | Yes   | Yes   | Yes                      | Yes    | No      | Yes      | Yes | Yes   | Yes  | Yes  | Yes   | Yes    | Yes     | Yes     | No         | Yes <sup>2</sup> | No      | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes              | Yes              | Yes              | Yes <sup>1</sup> | No    |
| 1044TA, 1044TUA, 1044PA, 1044PUA                                                                     | No         | Yes   | No    | No    | No                       | No     | Yes     | Yes      | No  | Yes   | No   | No   | No    | No     | No      | No      | No         | No               | Yes     | No               | No               | No               | No               | No               | No               | No               | No               | Yes   |
| 1025                                                                                                 | Yes        | No    | Yes   | Yes   | Yes                      | Yes    | No      | Yes      | Yes | Yes   | Yes  | Yes  | Yes   | Yes    | Yes     | Yes     | No         | Yes <sup>2</sup> | No      | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes              | Yes              | Yes              | Yes              | Yes              | Yes <sup>1</sup> | No    |
| 1025XUA, 1025USBC                                                                                    | No         | Yes   | No    | No    | No                       | No     | Yes     | Yes      | No  | Yes   | No   | No   | No    | No     | No      | No      | No         | No               | Yes     | No               | No               | No               | No               | No               | No               | No               | No               | Yes   |
| 1010CSZ                                                                                              | Yes        | No    | Yes   | Yes   | Yes                      | Yes    | No      | Yes      | Yes | Yes   | Yes  | Yes  | Yes   | Yes    | Yes     | Yes     | No         | No               | No      | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes              | Yes              | Yes              | Yes <sup>1</sup> | No    |
| 3 Gang Plates with WISER<br>41EPBDWCLM, 41EPBDWCLMZ, 41ECSFWM, 41ECSFWMZ, 41E10PBSWM, 41E10PBSWMZ    | Yes        | No    | Yes   | Yes   | Yes                      | Yes    | No      | Yes      | Yes | Yes   | Yes  | Yes  | Yes   | Yes    | Yes     | Yes     | No         | No               | No      | No               | Yes <sup>2</sup> | No               | No               | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>1</sup> | No    |
| 4 Gang Plates with WISER<br>41EPBDWCLM, 41EPBDWCLMZ, 41ECSFWM, 41ECSFWMZ, 41E10PBSWM, 41E10PBSWMZ    | No         | Yes   | No    | No    | No                       | No     | Yes     | Yes      | No  | Yes   | No   | No   | No    | No     | No      | No      | Yes        | No               | Yes     | No               | No               | No               | No               | No               | No               | No               | No               | Yes   |
| 3 Gang Plates with WISER<br>41E2PBSM, 41E2PBSWMZ, 41EPBCLM, 41EPBM, 41E300PBUD2SM                    | Yes        | No    | Yes   | Yes   | Yes                      | Yes    | No      | Yes      | Yes | Yes   | Yes  | Yes  | Yes   | Yes    | Yes     | Yes     | No         | No               | No      | No               | Yes <sup>2</sup> | No               | No               | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>2</sup> | Yes <sup>1</sup> | No    |
| 4 Gang Plates with WISER<br>41E2PBSWM, 41E2PBSWMZ, 41EPBCLM, 41EPBM, 41E300PBUD2SM                   | No         | Yes   | No    | No    | No                       | No     | Yes     | Yes      | No  | Yes   | No   | No   | No    | No     | No      | No      | Yes        | No               | Yes     | No               | No               | No               | No               | No               | No               | No               | No               | Yes   |
| 1043CP Data/TV                                                                                       | Yes        | No    | Yes   | Yes   | Yes                      | Yes    | No      | Yes      | Yes | Yes   | Yes  | Yes  | Yes   | Yes    | Yes     | Yes     | No         | Yes              | No      | Yes              | Yes              | Yes              | Yes              | Yes              | Yes              | Yes              | Yes <sup>1</sup> | No    |

Note:

(1) Must be mounted between the gyprock and the bracket


(2) Front face must be recessed into the wall by 10 mm or 10 mm render

Mounting accessories not mentioned in this list are not compatible


## Wiring Diagrams

### Standard Switching


LED indicator is permanently “ON”

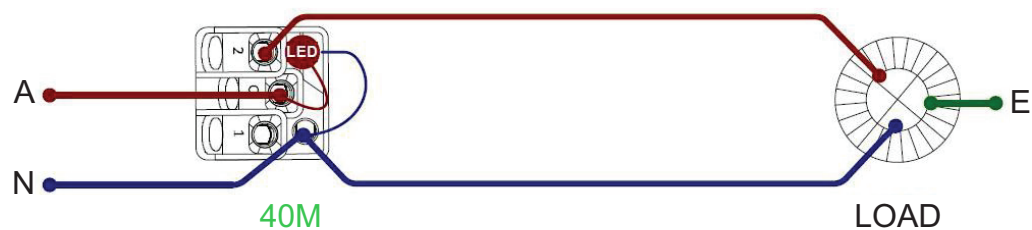

LED indicator “ON” when switch is “ON”

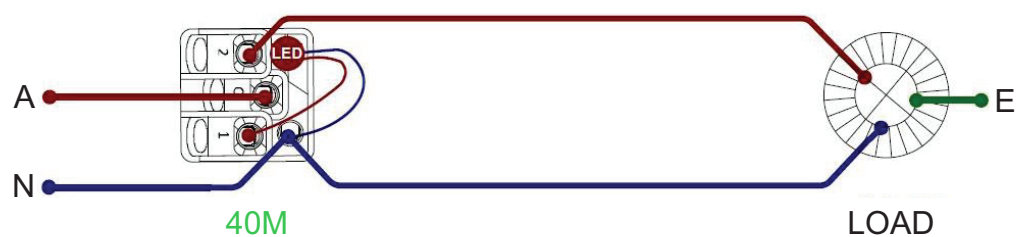


LED indicator “ON” when switch is “OFF”

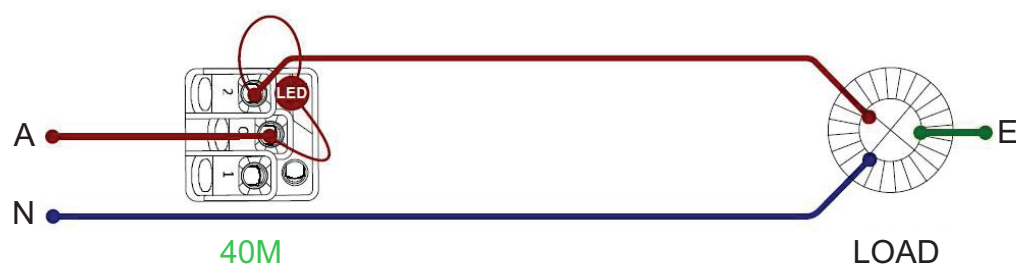


## Wiring Diagrams

### Standard Switching


LED indicator as power availability indicator LED is “ON” when switch is “OFF”

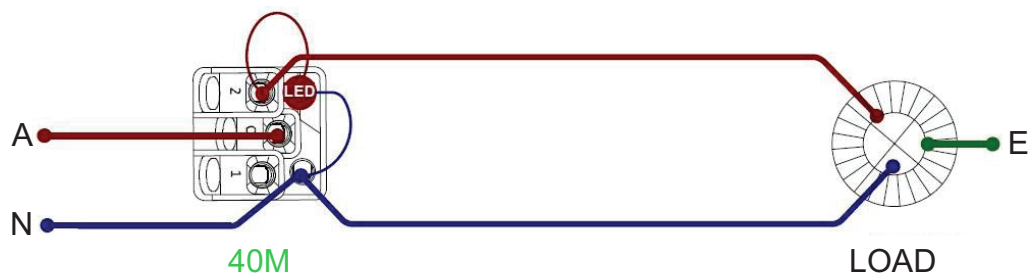

2-Way switching neutral present at the switch LED indicator “ON” when switch is “ON”

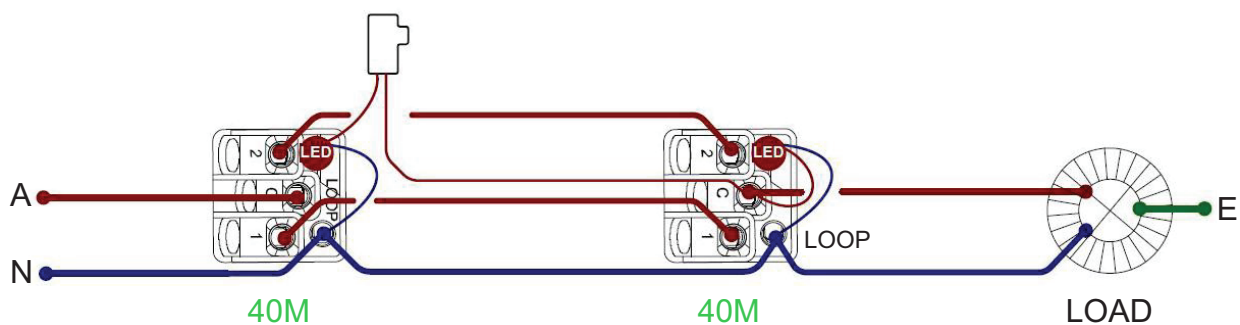


2-Way switching neutral present at switch LED indicator “ON” when switch is “OFF”

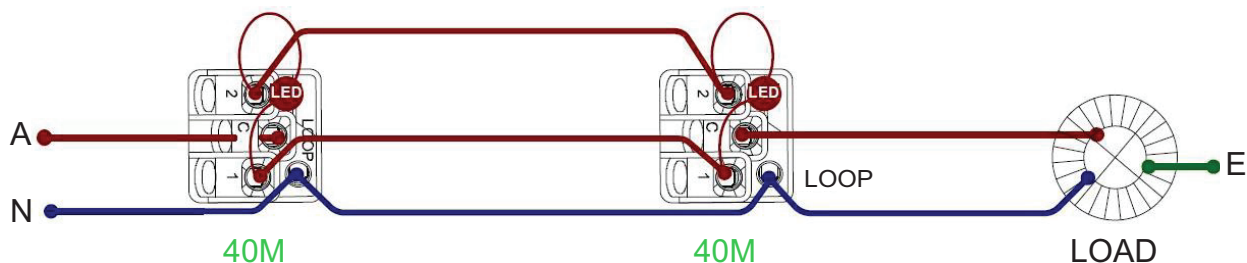


# Wiring Diagrams

## Standard Switching

2-Way switching no neutral present at switch LED indicator is “ON” when switch is “OFF”

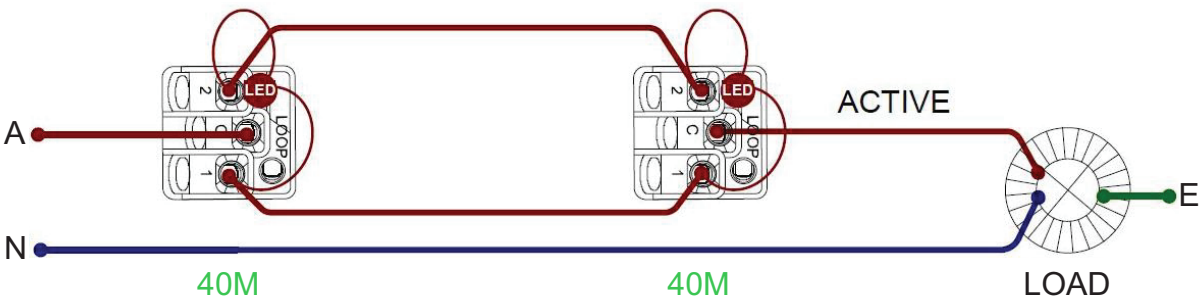


Multi-way switching no neutral present at switch LED indicator is “ON” when load is “OFF”

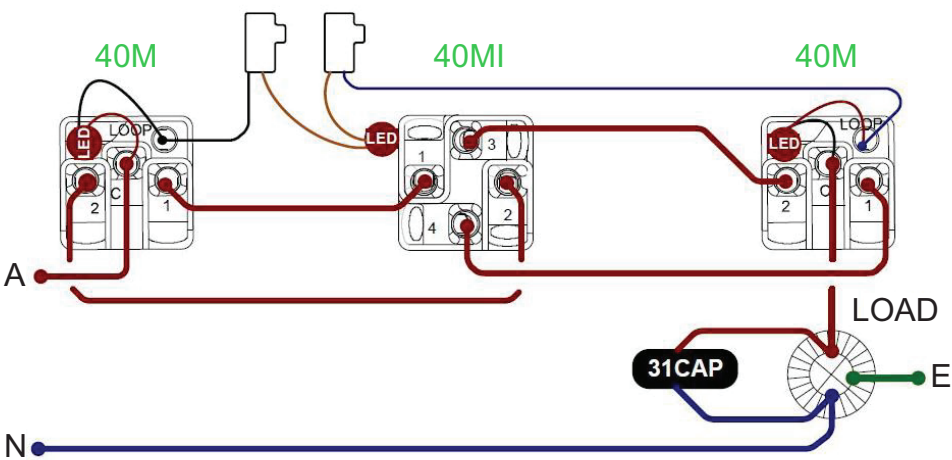


## Wiring Diagrams

### Standard Switching

2-Way switching (LED indicators at both ends) - 3 Wire Secondary and Primary

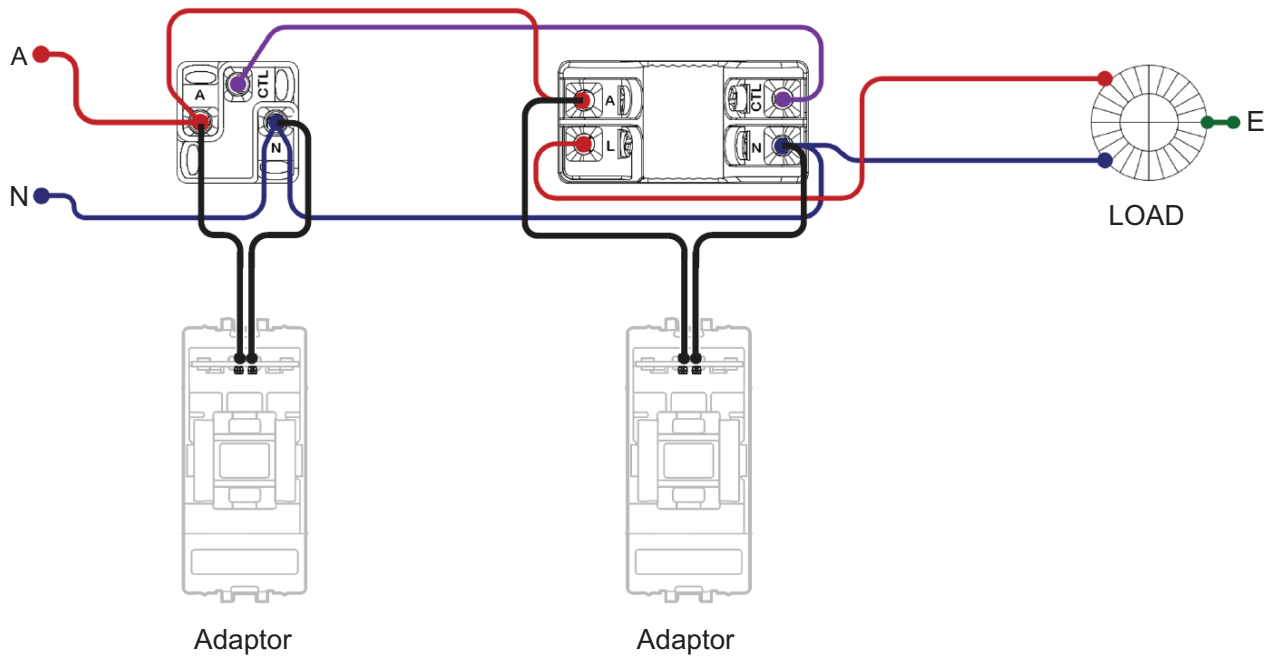


2-Way switching (LED indicators at both ends) -  
3 Wire Secondary and Primary - ON when load is OFF

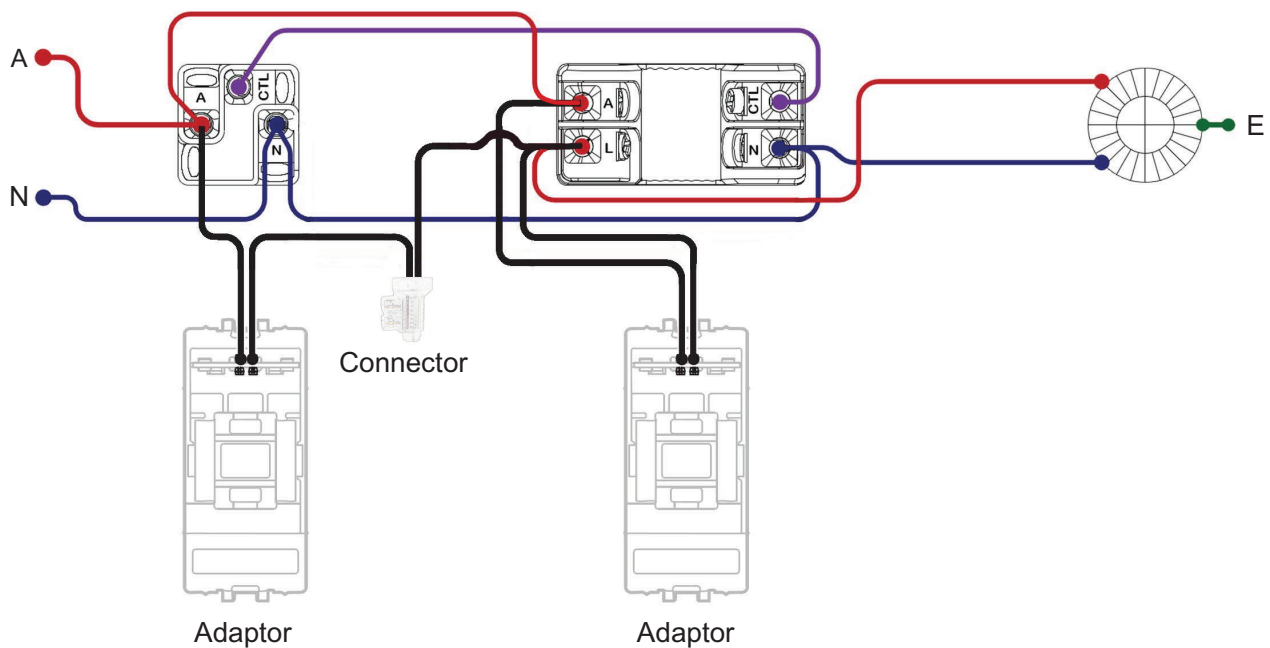


## Wiring Diagrams

### Standard Switching

2-Way switching (LED indicators at both ends) -  
3 Wire Secondary and Primary - ON when load is ON

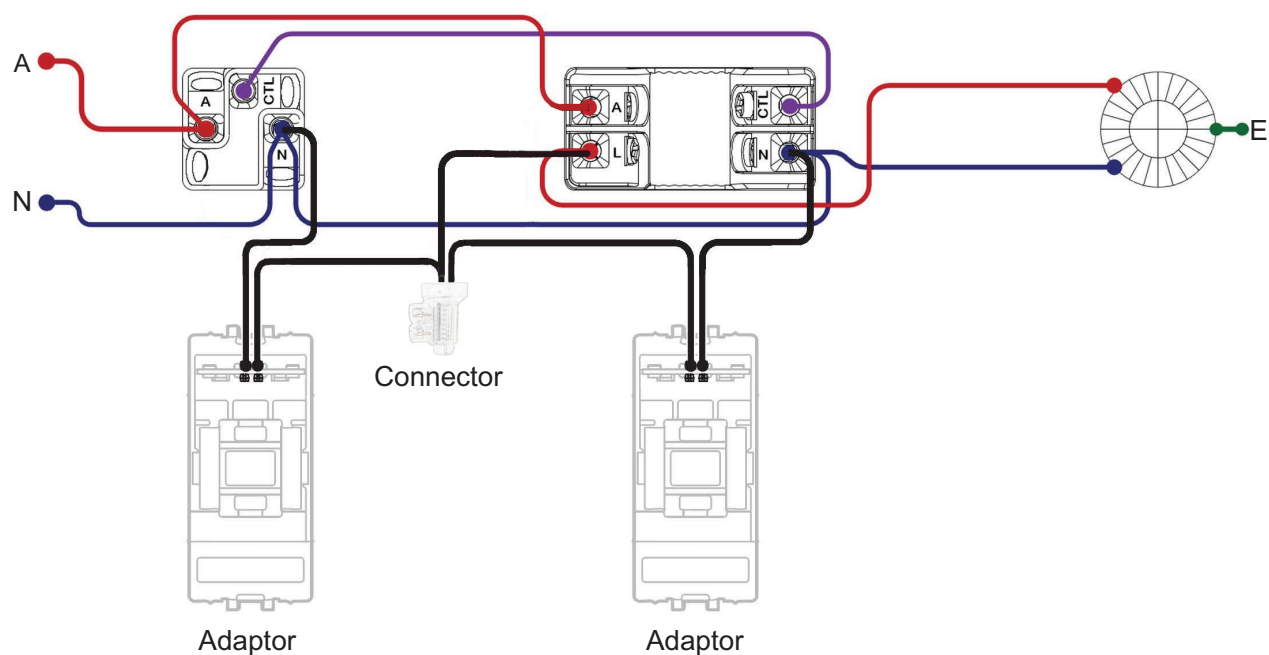


2-Way switching (LED indicators at both ends) -  
3 Wire Secondary and Primary - Permanently ON

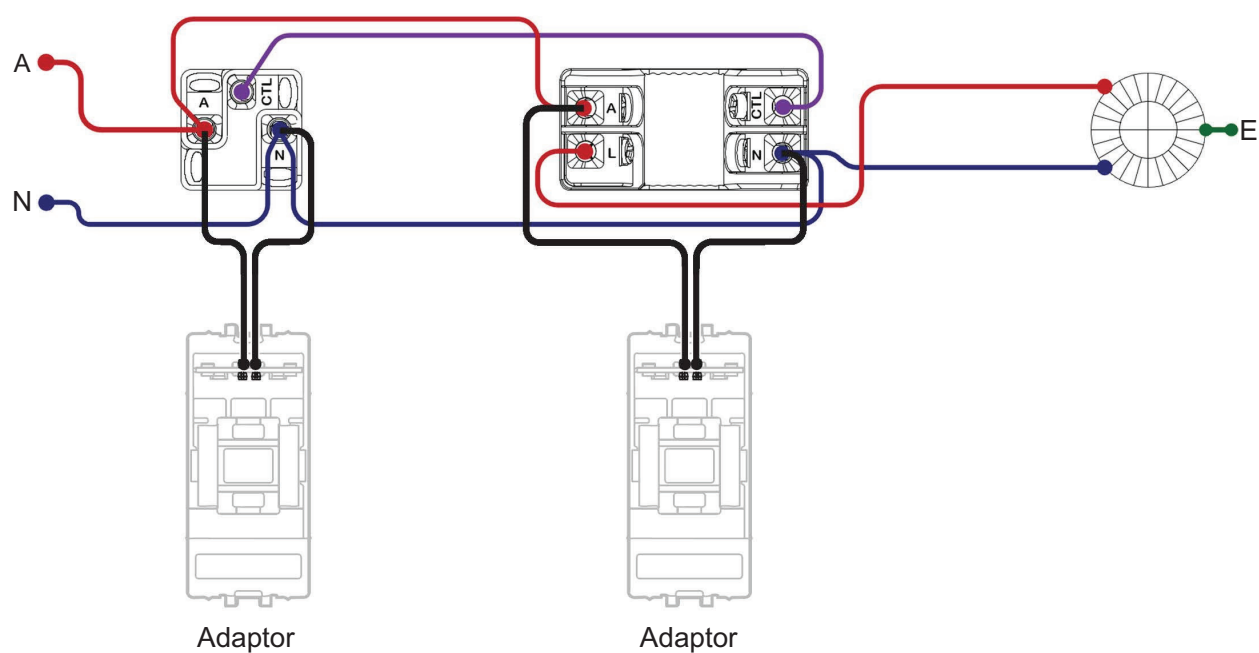


## Wiring Diagrams

### Standard Switching

3-Way switching (LED indicators at both ends) -  
3 Wire Secondary and Primary - ON when load is OFF

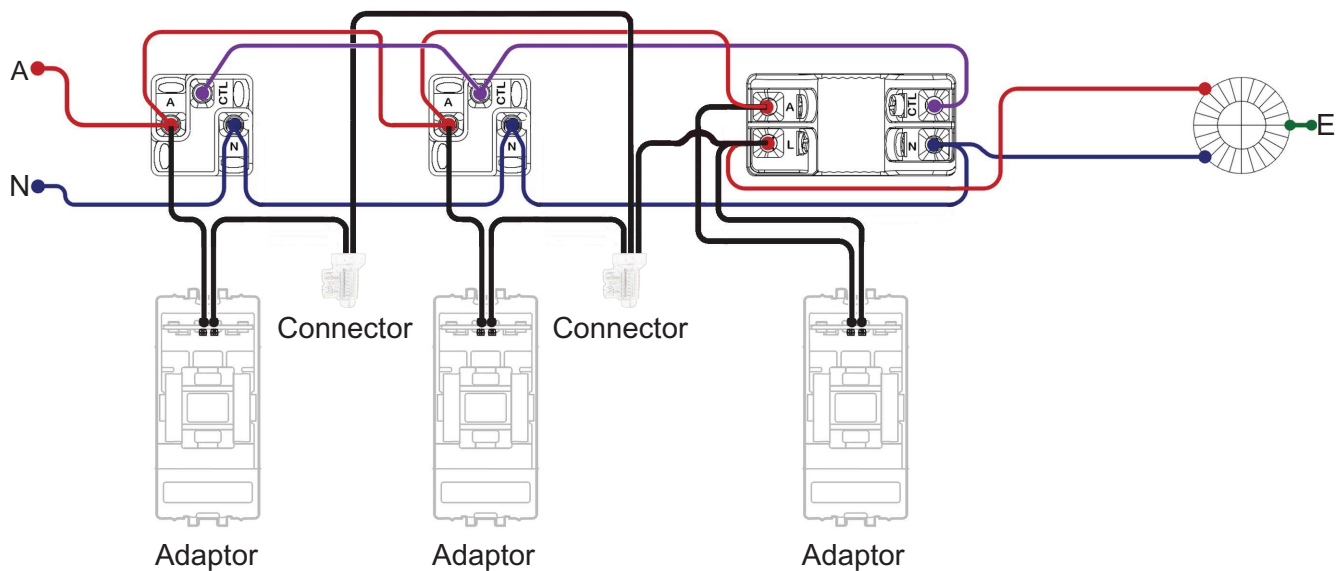

3-Way switching (LED indicators at both ends) -  
3 Wire Secondary and Primary - ON when load is ON

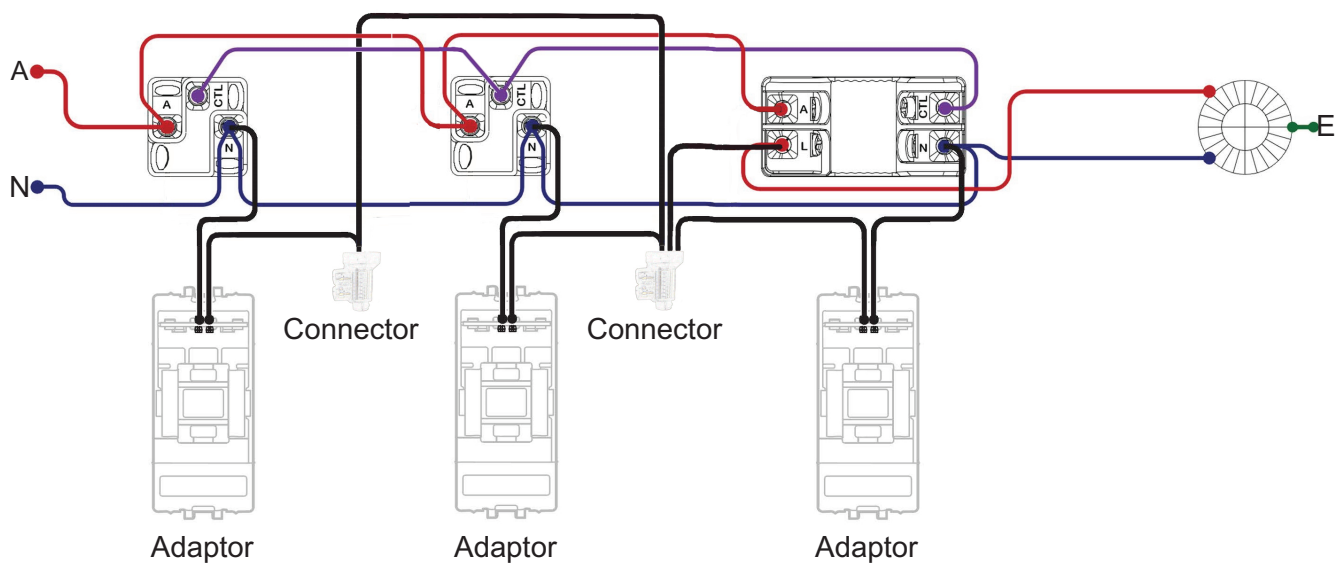




## Wiring Diagrams

### Standard Switching

3-Way switching (LED indicators at both ends) -  
3 Wire Secondary and Primary - Permanently ON

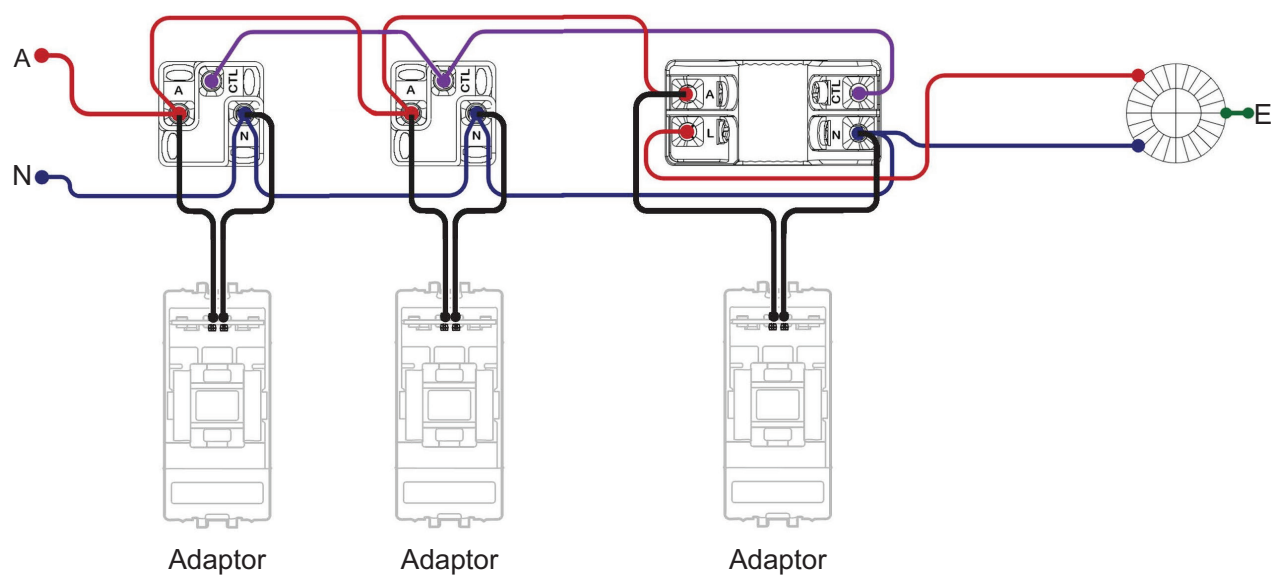

## Solis and Solis T Series Product Codes Explained

- Switch Catalogue
  - 10 – 1000 Series
  - 4X – 40 Series Mechanism (X) Gang of switches, 1, 2, 3, or 4 gang
  - 104XTA (T) Toggle Switch (A) Assembled
  - 104XPA (P) Push Button (A) Assembled
  - 104XTUA (T) Toggle Switch (UA) Unassembled
  - 104XPUA (P) Push Button (UA) Unassembled
  - 1043CP – 3-gang (CP) Communication Plate
- Socket Catalogue
  - 10 – 1000 Series
  - 10 – Auto Switched Socket
  - 25 – Twin Switched Socket
  - 25XUA - Twin Switched Socket with (X) Extra Switch (AU) Unassembled
  - 25USBC - Twin Switched Socket with USB C Mechanism Assembled
- Adaptor Catalogue
  - 40XA – (T) Toggle or (P) Push Button. Adaptor to be used with a rocker switch mechanism
  - 40RWDA – (R) Rotary adaptor to be used with a (WDA) Wiser Dimmer Adaptor (zigbee mode)
  - 40XWSA – (T) Toggle or (P) Push Button (WSA) Wiser Switch Adaptor. To be used with Wiser or other push button mechanisms
  - 40PA32COOK – Push Button Adaptor labeled “Cooker” to be used with a 32A rocker mechanism
- Colour catalogue
  - ZW – Matt White
  - ZB – Matt Black
  - WC – White Ceramic
  - EA – Ebony Aluminium
  - BB – Brushed Brass
  - PT – Platinum Aluminium

## Reference Numbers

Find technical information by product reference number

| Ref.          | Page |
|---------------|------|
| 40PA32COOK-BB | 46   |
| 40PA32COOK-EA | 46   |
| 40PA32COOK-PT | 46   |
| 40PA32COOK-WC | 46   |
| 40PA32COOK-ZB | 27   |
| 40PA32COOK-ZW | 27   |
| 40PA-ZB       | 26   |
| 40PA-ZW       | 26   |
| 40PWSA-BB     | 45   |
| 40PWSA-EA     | 45   |
| 40PWSA-PT     | 45   |
| 40PWSA-WC     | 45   |
| 40PWSA-ZB     | 25   |
| 40PWSA-ZW     | 25   |
| 40RWD A-BB    | 44   |
| 40RWD A-EA    | 44   |
| 40RWD A-PT    | 44   |
| 40RWD A-WC    | 44   |
| 40RWD A-ZB    | 24   |
| 40RWD A-ZW    | 24   |
| 40TA-BB       | 43   |
| 40TA-EA       | 43   |
| 40TA-PT       | 43   |
| 40TA-WC       | 43   |
| 40TWSA-BB     | 42   |
| 40TWSA-EA     | 42   |
| 40TWSA-PT     | 42   |
| 40TWSA-WC     | 42   |
| 90BD3-BK      | 51   |
| 90BD4-BK      | 51   |
| 154C4         | 49   |
| 155PRMU4      | 49   |
| 155U4         | 50   |
| 157PRM4       | 50   |
| 1010CSZ-BB    | 29   |
| 1010CSZ-EA    | 29   |
| 1010CSZ-PT    | 29   |
| 1010CSZ-WC    | 29   |
| 1010CSZ-ZB    | 11   |
| 1010CSZ-ZW    | 11   |
| 1025-BB       | 30   |
| 1025-EA       | 30   |

| Ref.        | Page |
|-------------|------|
| 1025-PT     | 30   |
| 1025USBC-BB | 32   |
| 1025USBC-EA | 32   |
| 1025USBC-PT | 32   |
| 1025USBC-WC | 32   |
| 1025USBC-ZB | 14   |
| 1025USBC-ZW | 14   |
| 1025-WC     | 30   |
| 1025XUA-BB  | 31   |
| 1025XUA-EA  | 31   |
| 1025XUA-PT  | 31   |
| 1025XUA-WC  | 31   |
| 1025XUA-ZB  | 13   |
| 1025XUA-ZW  | 13   |
| 1025-ZB     | 12   |
| 1025-ZW     | 12   |
| 1041PA-ZB   | 15   |
| 1041PA-ZW   | 15   |
| 1041PUA-ZB  | 19   |
| 1041PUA-ZW  | 19   |
| 1041TA-BB   | 33   |
| 1041TA-EA   | 33   |
| 1041TA-PT   | 33   |
| 1041TA-WC   | 33   |
| 1041TUA-BB  | 37   |
| 1041TUA-EA  | 37   |
| 1041TUA-PT  | 37   |
| 1041TUA-WC  | 37   |
| 1042PA-ZB   | 16   |
| 1042PA-ZW   | 16   |
| 1042PUA-ZB  | 20   |
| 1042PUA-ZW  | 20   |
| 1042TA-BB   | 34   |
| 1042TA-EA   | 34   |
| 1042TA-PT   | 34   |
| 1042TA-WC   | 34   |
| 1042TUA-BB  | 38   |
| 1042TUA-EA  | 38   |
| 1042TUA-PT  | 38   |
| 1042TUA-WC  | 38   |
| 1043CP-BB   | 41   |
| 1043CP-EA   | 41   |

| Ref.       | Page |
|------------|------|
| 1043CP-PT  | 41   |
| 1043CP-WC  | 41   |
| 1043CP-ZB  | 23   |
| 1043CP-ZW  | 23   |
| 1043PA-ZB  | 17   |
| 1043PA-ZW  | 17   |
| 1043PUA-ZB | 21   |
| 1043PUA-ZW | 21   |
| 1043TA-BB  | 35   |
| 1043TA-EA  | 35   |
| 1043TA-PT  | 35   |
| 1043TA-WC  | 35   |
| 1043TUA-BB | 39   |
| 1043TUA-EA | 39   |
| 1043TUA-PT | 39   |
| 1043TUA-WC | 39   |
| 1044PA-ZB  | 18   |
| 1044PA-ZW  | 18   |
| 1044PUA-ZB | 22   |
| 1044PUA-ZW | 22   |
| 1044TA-BB  | 36   |
| 1044TA-EA  | 36   |
| 1044TA-PT  | 36   |
| 1044TA-WC  | 36   |
| 1044TUA-BB | 40   |
| 1044TUA-EA | 40   |
| 1044TUA-PT | 40   |
| 1044TUA-WC | 40   |


## Notes

## Notes

## Notes



# Environmental Data Program

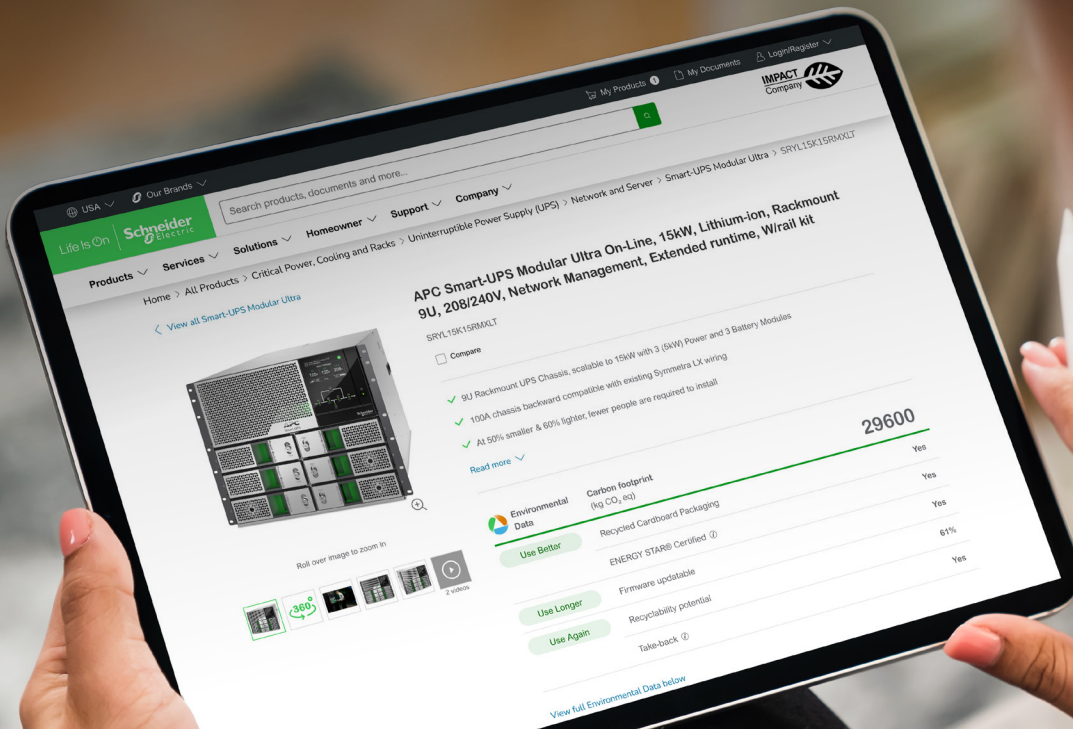


## Next-level transparency for better-informed product choices

The Environmental Data Program is a framework for how we measure, categorize, and compare the environmental attributes and footprint of our products.

Using a rigorous, fact-based methodology, the program provides environmental data from across the product lifecycle.

### Five data categories across the product lifecycle

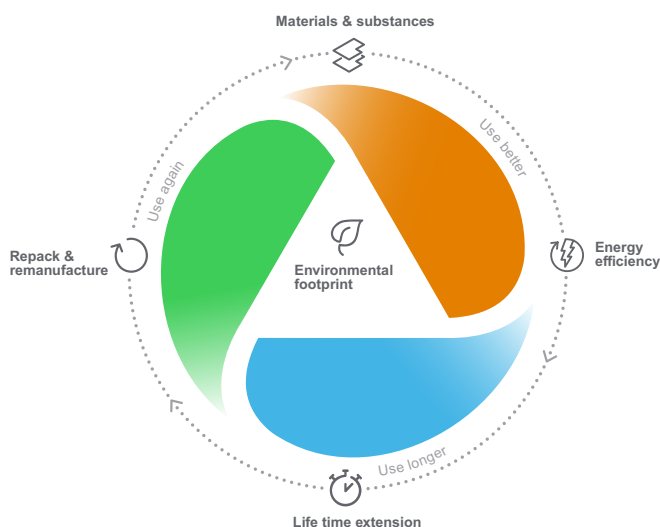

**Use Better:** How sustainable a product is, including environmental footprint, materials and substances, packaging, and energy efficiency.

**Use Longer:** How a product's life time can be effectively extended in terms of reparability and updatability.


**Use Again:** How a product can be reused, from dismantling and remanufacturing to recyclability and manufacturer take back.

With this transparent, verified data, customers and partners are empowered to make conscious environmental choices and accurately evaluate and report on sustainability performance.

All our hardware offers have an associated environmental data available on se.com product pages.



Learn more about the  
**Environmental Data Program**

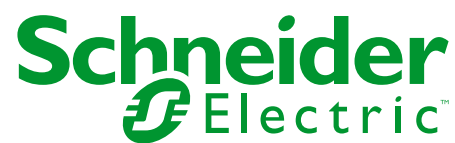

Schneider Electric (Australia) Pty. Ltd.  
33-37 Port Wakefield Road,  
Gepps Cross, South Australia, 5094  
PO Box 132, Enfield Plaza,  
South Australia, 5085  
[www.clipsal.com](http://www.clipsal.com)

Consumer Support Enquiries  
National Customer Care  
Phone: 13SEAU (137328)  
[clipsal.com/clipsal-support/contact-us](http://clipsal.com/clipsal-support/contact-us)

06-2026

©2026 Schneider Electric. All Rights Reserved. Solis and Clipsal are trademarks of Schneider Electric (Australia) Pty Ltd.

LSB03190EN\_03

 **CLIPSAL**<sup>®</sup>

[clipsal.com](http://clipsal.com)

**Schneider**  
 **Electric**<sup>™</sup>