Temperature

RTT15S Temperature Transmitter with Optional Optical Configurator

Product Specification

PSS 2A-1F5 B, Rev E

December 2025



https://www.se.com

Legal Information

The information provided in this document contains general descriptions, technical characteristics and/or recommendations related to products/solutions.

This document is not intended as a substitute for a detailed study or operational and site-specific development or schematic plan. It is not to be used for determining suitability or reliability of the products/solutions for specific user applications. It is the duty of any such user to perform or have any professional expert of its choice (integrator, specifier or the like) perform the appropriate and comprehensive risk analysis, evaluation and testing of the products/solutions with respect to the relevant specific application or use thereof.

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this document are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owner.

This document and its content are protected under applicable copyright laws and provided for informative use only. No part of this document may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the document or its content, except for a non-exclusive and personal license to consult it on an "as is" basis.

Schneider Electric reserves the right to make changes or updates with respect to or in the content of this document or the format thereof, at any time without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this document, as well as any non-intended use or misuse of the content thereof.

Table of Contents

Overview 4
Operating, Transportation, and Storage Specifications 8
Performance Specifications 9
Functional Specifications 10
HART Communication Specifications 12
Physical Specifications 14
Electrical Certifications 16
Ordering Instructions and Order Codes 25
Nominal Dimensions 30
Related Documents 37

Overview

The Model RTT15S Temperature Transmitter is a microprocessor-based temperature transmitter that uses the HART® communication protocol. It receives input signals from thermocouple (TC), resistance temperature detector (RTD), ohm (Ω), or millivolt (mV) sources. It is available as a basic module, or in an explosion proof housing with optional display and optical buttons for local configuration.

Features

- Optional LCD display with selectable, programmable red or white backlight.
- Optional optical buttons for local configuration in seven languages.
- User-selectable HART versions 5 and 7.
- IP54, IP66, IP68, TYPE 4X, explosion proof housing selections in aluminum or stainless steel.
- Basic module can be mounted to surface or DIN rail.
- One unit configurable for TC , RTD, ohm, and mV.
- Supports 2-, 3-, and 4-wire RTDs.
- Allows average or difference measurement using 2-wire inputs.
- TC cold junction compensation.
- Galvanic isolation for both input and output.
- Automatic self-diagnostics and self-calibration.
- Wide selection of sensors and thermowells.
- Configurable failsafe mA value.
- Conforms to applicable European Union Directives (product marked with “CE” logo).
- EMC immunity per EU Directive 2014/30/EU.
- Compliant with NAMUR NE 21 criterion for burst.
- Meets many testing agency requirements for hazardous area installations.
- Standard 2-year warranty.

General Description

The RTT15S transmiitter is available in the following product configurations:

- Standalone DIN B module
- DIN B module in either weatherproof or explosion-proof connection head housing
- DIN B module in display housing and optional optical configuring display or non-configuring display
- As integrated assemblies with housing options above and attached sensors and/or thermowells

Input Types

The RTT15S transmitter can be used with a wide variety of temperature sensors, including 2-, 3-, and 4-wire RTDs, most popular thermocouples, and other resistance and millivolt input devices. The following is a general list of transmitter input types:

- Platinum RTDs, 2-, 3-, and 4-wire
- Nickel RTD, 3-wire
- Thermocouples
- Millivolt
- Ohm
- Average or difference measurement with two 2-wire RTDs, two TCs, or two mV inputs

Efficiency and Durability

Industrial-grade integrated circuits and sealed electronics combine to make this microprocessor-based transmitter an efficient and durable device.

Remote Communications

The transmitter uses the HART communication protocol for remote digital communication.

4 to 20 mA with HART 7 or HART 5 communications allows direct analog connection to common receivers while still providing full intelligent digital communications using a HART communicator or PC-based configurator.

HART 7 provides the familiar features of HART 5 as well as features introduced in HART 6 and 7, including long tag support, multivariable support and variable mapping, extended device status, individual sensor calibration, burst mode with event triggers, and trend reporting with time stamps.

HART Device Descriptors (DDs) are available from the Schneider Electric website for download. They are also part of the DD library available to handheld configurator users.

Rugged and Durable Sensors

Schneider Electric sensors are of high quality and rugged construction, and provide maximum accuracy and longevity. Sensors designed for use with wells include a spring loading mechanism that helps ensure continuous contact between the sensor tip and well.

Galvanic Isolation

Galvanic isolation is provided for input and output.

Automatic Self-Calibration

This transmitter has an advanced automatic self-calibration routine. Several times per minute, the transmitter checks the zero and full scale output against highly accurate and stable internal voltage signals that are referenced back to the factory calibration stored in nonvolatile EEPROM memory. Any necessary adjustments are made automatically without interrupting the output signal.

Out-of-Range and Fail State Current

Low out-of-range (downscale burnout) and high out-of-range (upscale burnout) output values are user configurable between 3.5 and 23 mA. A configuration selection for NAMUR 43 (3.8 and 20.5 mA) is also provided.

The transmitter can also be configured for sensor error detection. Output values are independently configurable between 3.5 and 23 mA for both shorted and open sensor conditions. Configuration selections are also provided for direct selection of NAMUR 43 low (3.5 mA) and NAMUR 43 high (23 mA), both independently selectable for either shorted or open sensor conditions. Shorted sensor detection is not applicable for thermocouples.

Optional Display and Optical Buttons

The transmitter is available with an optional, 96x64 pixel LCD display with a backlight that flashes if an error is detected. Both the normal backlight and the flashing error detected backlight can be configured as red or white, or turned off completely.

The display is available both with and without optical buttons that can be used for operating and programming the transmitter, even when the cover window is in place. The buttons can be operated either with or without gloves, and adapt to wear and smudges left on the surface.

The optical buttons are immune to interference from ambient light sources and other panel meters, such as other RTT15S transmitters mounted nearby.

Table 1 - Display Specifications

Display resolution	96 x 64 pixels
Number of digits	5
Response time, button to display	< 150 ms
Backlight	Selectable ON/OFF
Backlight color	Selectable white or red
Error detection indication	Selectable white or red (flashing)

Figure 1 - Monitoring View




Figure 2 - Programming View





Figure 3 - Diagnostics View



Operating, Transportation, and Storage Specifications

To help minimize the transfer of heat from the process to the housing, use thermowell extensions. In extreme cases, use a remote housing installation.

NOTICE

HAZARD OF REDUCED PERFORMANCE

Do not exceed the ambient temperature limits at the housing. This is particularly relevant when sensors/wells are direct-connected to the housing and very high process temperatures are being measured.

Failure to follow these instructions can result in reduced performance.

Influence	Operative Limits	Transportation and Storage Limits
Ambient Temperature (1)(2)	-40 and +85°C (-40 and +185°F) for housing with silicone o-ring, or no housing	-40 and +85°C (-40 and +185°F)
	-20 and +85°C (4 and +185°F) for housing with FKM o-ring	
Relative Humidity	< 95%, non-condensing, no housing	< 95%, non-condensing, no housing
	0 and 100%, condensing, with housing	0 and 100%, condensing, with housing
Supply Voltage, DC	Ex ia, intrinsically safe: 10...30 VDC (no backlight) 12...30 VDC (with backlight)	Not Applicable
	Other certifications: 10...35 VDC (no backlight) 12...35 VDC (with backlight)	
Vibration (display housing only)	1.6 mm (0.06 in) from 2 to 25 Hz 4 g from 25 to 100 Hz (IEC 60068-2-6:2007)	1070 mm (42 in) drop in shipping container

(1) Calibration temperature range is 20 to 28°C (68 to 82°F).
(2) LCD performance below is reduced below -20°C and above +70°C (-4°F and +158°F).

Performance Specifications

All performance specifications apply to the transmitter only. Any issues associated with the thermocouple or RTD sensors, or any other millivolt or resistance sensors, are cumulative. For performance specifications on Schneider Electric RTDs and thermocouples, see the Schneider Electric Temperature Product Configurator at www.se-tempconfig.com.

Accuracy

Accuracy is the larger value of the General Values table or the Basic Values table.

Table 2 - General Values

All	Absolute Accuracy	Temperature Coefficient
All	≤ ±0.05% of span	≤ ±0.005% of span/°C

Table 3 - Basic Values

Input Type	Basic Accuracy	Temperature Coefficient
Pt50 – Pt1000	≤ ±0.1°C	≤ ±0.0005 °C/°C
Ni50 – Ni1000	≤ ±0.2°C	≤ ±0.0005 °C/°C
Resistance	≤ ±0.1 Ω	≤ ±5 mΩ/°C
Voltage	≤ ±10°µV	≤ ± 0.5 µV/°C
TC type E, J, K, L, N, T, U	≤ ±0.5°C	≤ ± 0.025 °C/°C
TC type B[1], R, S, W3, W5	≤ ±1°C	≤ ± 0.1 °C/°C
TC type B[2]	≤ ±3°C	≤ ± 0.3 °C/°C
TC type B[3]	≤ ±8°C	≤ ± 0.8 °C/°C
TC type B[4]	not specified	not specified

Table 4 - Thermocouple Accuracy Specification Ranges

TC B[1]	> 400°C
TC B[2]	> 160°C; < 400°C
TC B[3]	> 85°C; < 160°C
TC B[4]	< 85°C

Additional Performance Specifications

TC Cold Junction Compensation	< ±1.0°C
Maximum Offset on Input Signal	50% of selected maximum value
EMC Immunity Influence	< ±0.1% of span
NAMUR NE 21, A Burst Criterion	< ±1% of span

Functional Specifications

Thermocouple Input Specifications

Table 5 - Thermocouple Range Limits and Span

TC	Range Limits	Minimum Span	Standard
B	0 and 1,820°C (32 and 3,308°F)	100°C (180°F)	IEC584
E	-100 and +1,000°C (-148 and +1,832°F)	50°C (90°F)	IEC584
J	-100 and +1,200°C (-148 and +2,192°F)	50°C (90°F)	IEC584
K	-180 and +1,372°C (-292 and +2,501.6°F)	50°C (90°F)	IEC584
L	-200 and +900°C (-328 and +1,652°F)	50°C (90°F)	DIN 43710
Lr	-200 and +800°C (-328 and +1,472°F)	50°C (90°F)	GOST 3044-84
N	-180 and +1,300°C (-292 and +2,372°F)	50°C (90°F)	IEC584
R	-50 and +1,760°C (-58 and +3,200°F)	100°C (180°F)	IEC584
S	-50 and +1,760°C (-58 and +3,200°F)	100°C (180°F)	IEC584
T	-200 and +400°C (-328 and +752°F)	50°C (90°F)	IEC584
U	-200 and +600°C (-328 and 1,112°F)	50°C (90°F)	DIN 43710
W3	0 and 2,300°C (32 and 4,172°F)	100°C (180°F)	ASTM E988-90
W5	0 and 2,300°C (32 and 4,172°F)	100°C (180°F)	ASTM E988-90

RTD Input Specifications

Cable resistance per wire (max): 5 Ω (up to 50 Ω per wire is possible with reduced measurement accuracy)

Sensor current: Nom. 0.2 mA

Table 6 - RTD Range Limits and Span

RTD	Range Limits	Minimum Span	Standard
Pt100	-200 and +850°C (-328 and +1,562°F)	10°C (18°F)	IEC 60751
Ni100	-60 and +250°C (-76 and +482°F)	10°C (18°F)	DIN 43760
All	0 - 7000 Ω	25 Ω	≤ ±0.005% of span/°C

Ohms Resistance Input Specifications

Range Limits: 0 and 7,000 Ω

Minimum Span: 25 Ω

Millivolt Input Specifications

Range Limits: -800 and +800 mV

Minimum Span: -2.5 mV


Input Resistance: 10 MΩ

Supply Voltage Requirements and External Loop Load Limitations

Nominal minimum supply voltage for HART 4 to 20 mA output with a superimposed digital signal is 8 VDC, for transmitters without a display. For transmitters that have the optional display, the minimum is 10 VDC if backlight is not used, or 12 VDC when backlight is in use.

The maximum supply voltage is 30 VDC for transmitters certified/approved as intrinsically safe; 35 VDC otherwise.

Figure 4 - HART 4 to 20 mA Output: Supply Voltage vs. Output Load

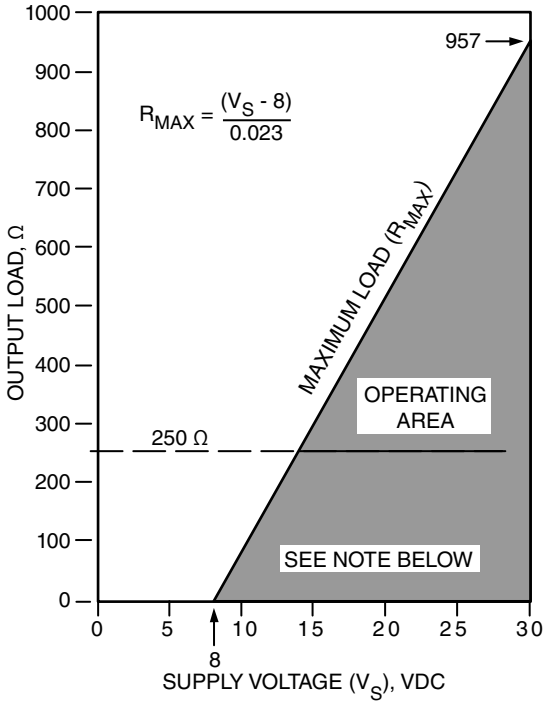

NOTE

The transmitter will function with an output load less than 250 Ω provided that a HART Communicator or PC-based Configurator is not connected to it. Use of a HART Communicator or PC-based Configurator requires 250 Ω minimum load.

Other Functional Specifications

Damping	1 to 6 s, configurable
Updating Time — Single Input	440 ms
Supply Voltage Effect	0.005% of span/volt change
Long-Term Stability (Drift)	0.1% of span/year
Thermocouple Cold Junction Compensation	TC cold junction compensated via internal measurement, user-entered constant, or external RTD (2-wire) provided by Pt100 or Ni100.
RTD Cable Resistance Compensation — Transmitter-to-Sensor	**4-Wire RTD:** Transmitter compensates for cable resistance changes due to ambient temperature changes. **3-Wire RTD:** Transmitter compensates for cable resistance changes due to temperature, as long as cables are exposed to the same ambient temperature. **2-Wire RTD:** Transmitter compensates for constant cable resistance. User may enter resistance value, or transmitter will measure it during setup.
Sensor Error Detection	Available for RTD, TC, and ohms inputs (open and shorted for RTD and ohms inputs, and open for TC inputs).
Input Resistance	10 MΩ


HART Communication Specifications

Parameter	Analog Mode	Multidrop Mode
Remote Configurator	HART Communicator or PC-based configurator	
Communication Rate	1,200 baud	
Communication Distance (rated)	3,050 m (10,000 ft)	1,525 m (5,000 ft)

4 to 20 mA Analog Mode

Analog output signal is updated 30 times per second. A minimum loop load of 250 ohms is required.


Figure 5 - HART 4 to 20 mA Output Bock Diagram (One Transmitter)

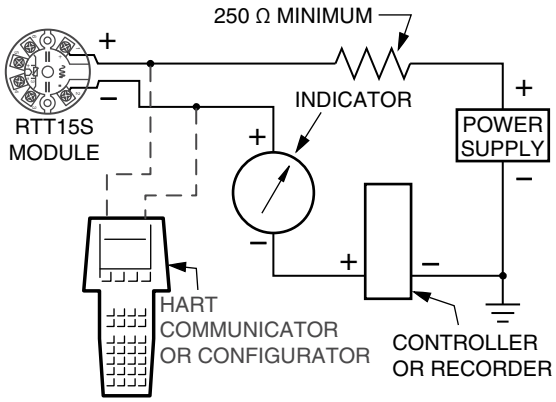

Multidrop Mode (Fixed Current)

This mode supports communication with up to 64 transmitters with HART 7, or up to 15 transmitters with HART 5 on a single pair of signal/power wires. The output signal is updated 4 times/second. A minimum loop load of 250 ohms is required.

Figure 6 - HART Multidrop Block Diagram (Up to 15 Transmitters with HART 5; up to 64 with HART 7)

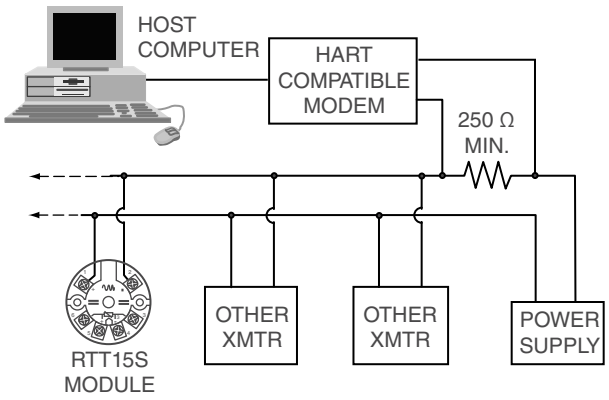

Physical Specifications

Mounting

The basic transmitter module can be mounted to a DIN rail using the optional mounting clip and self-tapping screw. The basic module can also be mounted to a surface using user-supplied hardware.

The transmitter housing (without sensor) can be remote mounted to a surface or nominal DN 50 or 2 in pipe using the optional mounting bracket.

Electrical Connections

There are six terminals on the transmitter module for input and output connections. Four terminals are for RTD, TC, ohm, or mV sensor inputs, and two terminals (marked + and –) are for measurement output.

Housing Physical Data

Also refer to Nominal Dimensions, page 30.

Description	Model Selection	Material	Ingress Protection	Weight
No Housing (transmitter module only)	“N“ for Configuration Code STM01	n/a	IP54	50 g (1.8 oz)
Display Housing, 1/2 in NPT Conduit	“1“ for Configuration Code STM01; 53C for other Configuration Codes	Low-copper (< 0.05) aluminum	IP66, IP68, TYPE 4X	1.3 kg (2.9 lbs)
Display Housing, M20 Conduit	“2“ for Configuration Code STM01; 53M for other Configuration Codes	Low-copper (< 0.05) aluminum	IP66, IP68, TYPE 4X	1.3 kg (2.9 lbs)
Display Housing, 1/2 in NPT Conduit	“3“ for Configuration Code STM01; 54C for other Configuration Codes	316 ss	IP66, IP68, TYPE 4X	2.8 kg (6.2 lbs)
Display Housing, M20 Conduit	“4“ for Configuration Code STM01; 54M for other Configuration Codes	316 ss	IP66, IP68, TYPE 4X	2.8 kg (6.2 lbs)
GP Connection Head	“31“ for Configuration Codes SGP01, 2,3,4; SSP03	Aluminum Alloy A380 (3 to 4% copper)	IP66, TYPE 4	0.36 kg (0.8 lbs)
GP Connection Head	“91“ for Configuration Codes SGP01, 2,3,4; SSP03	316L ss	IP66, TYPE 4X	1.09 kg (2.4 lbs)
XP Connection Head	“59“ for Configuration Codes SXP01, 2, 3, 4, 5, 6, 7; SEL01, 2, 3, 4, 5, 6, 7	Aluminum Alloy A380 (3 to 4% copper)	IP66, TYPE 4	0.48 kg (1.05 lbs)
XP Connection Head	“60“ for Configuration Codes SXP01, 2, 3, 4, 5, 6, 7; SEL01, 2, 3, 4, 5, 6, 7	316L ss	IP66, TYPE 4X	1.41 kg (3.1 lbs)

Ohms Resistance Input Specifications

Range Limits: 0 and 7,000 Ω

Minimum Span: 25 Ω

Other Physical Specifications

Damping	1 to 6 s, configurable
Updating Time — Single Input	440 ms
Supply Voltage Effect	0.005% of span/volt change
Long-Term Stability (Drift)	0.1% of span/year
Thermocouple Cold Junction Compensation	TC cold junction compensated via internal measurement, user-entered constant, or external RTD (2-wire) provided by Pt100 or Ni100.
RTD Cable Resistance Compensation — Transmitter-to-Sensor	**4-Wire RTD:** Transmitter compensates for cable resistance changes due to ambient temperature changes. **3-Wire RTD:** Transmitter compensates for cable resistance changes due to temperature, as long as cables are exposed to the same ambient temperature. **2-Wire RTD:** Transmitter compensates for constant cable resistance. User may enter resistance value, or transmitter will measure it during setup.
Sensor Error Detection	Available for RTD, TC, and ohms inputs (open and shorted for RTD and ohms inputs, and open for TC inputs).
Input Resistance	10 MΩ

Electrical Certifications

The RTT15S Temperature Transmitter is designed to meet the electrical safety descriptions listed in the tables below when installed in accordance with agency installation instructions. Agency installation instructions are included with the purchased product, or can be downloaded at www.se.com by typing the certification type in the search box. For detailed information or status of testing laboratory approvals/certifications, contact Global Customer Support.

Table 7 - Transmitter Model without Housing

Agency Certification, Type of Protection, and Area Classification	Application Conditions	Configuration Code	Basic Module for DIN Rail
ATEX intrinsic safe II 1 G Ex ia IIC T6...T4 Ga II 1 D Ex ia IIIC Db	For Pi – 0.84W T6: -40 to +47°C T5: -40 to +62°C T4: -40 to +85°C For Pi – 0.75W T6: -40 to +50°C T5: -40 to +65°C T4: -40 to +85°C	STM01	RTT15S-T*BB
CSA and CSAus intrinsic safe Class I, Division 1, Groups A, B, C, and D T6...T4; Class II, Division 1, Groups E, F, and G; Class III Ex ia IIC T6...T4 Ga Class I, Zone 0, AEx ia IIC T6...T4 Ga	T4: -40 ≤ Ta ≤ +85°C T5: -40 ≤ Ta ≤ +60°C T6: -40 ≤ Ta ≤ +60°C	STM01	RTT15S-T*BB
CSA and CSAus Division 2 and zone 2 intrinsic safe Class I, Division 2 Groups A, B, C, D T6-T4 Ex ic IIC T6…T4 Gc Class I, Zone 2 AEx ic IIC T6...T4 Gc	T4: -40 ≤ Ta ≤ +85°C T5: -40 ≤ Ta ≤ +60°C T6: -40 ≤ Ta ≤ +60°C	STM01	RTT15S-T*BB
FM intrinsic safe Class I, Division 1, Groups ABCD Class 1, Zone 0, Ex/AEx ia IIC T6, T4	T4: -40 ≤ Ta ≤ +85°C T6: -40 ≤ Ta ≤ +60°C	STM01	RTT15S-T*BB
FM nonincendive Class I, Division 2, Groups ABCD Class I, Zone 2, IIC	T4: -40 ≤ Ta ≤ +85°C T6: -40 ≤ Ta ≤ +60°C	STM01	RTT15S-T*BB
IECEx intrinsic safe Ex ia IIC T6...T4 Ga Ex ia IIIC Db	For Pi – 0.84W T6: -40 to +47°C T5: -40 to +62°C T4: -40 to +85°C For Pi – 0.75W T6: -40 to +50°C T5: -40 to +65°C T4: -40 to +85°C	STM01	RTT15S-T*BB

Table 8 - Transmitter in Optical Housing, No Sensor Attached

Agency Certification, Type Protection, and Area Classification	Application Conditions	Configuration Code	RTT15S Electrical Safety Design Code
ATEX intrinsic safe II 1 G Ex ia IIC T6...T4 Ga II 2 D Ex ia IIIC T60°C...T100°C Db	**For Ex ia** T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 45°C T60°C	STM01	AA
ATEX Increased Safety and intrinsic safe for Zone 2 II 3 G Ex ic IIC T6...T4 Gc II 3 D Ex ic IIIC T85°C...T100°C Dc II 3 G Ex ec IIC T6...T4 Gc	**For Ex ec** O-Ring Sealing: Silicone T4: -40 ≤ Ta ≤ 85°C T4 (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T4 (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 43°C (+55°C) T6 O-Ring Sealing: FKM T4: -20 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4: -20 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -20 ≤ Ta ≤ 60°C **For Ex ic** T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 43°C (+55°C) T85°C	STM01	AN
ATEX flameproof II 2 G Ex db IIC T6...T4 Gb II 2 D Ex tb IIIC T85°C...T100°C Db	**For Ex db** T4, T5: -40 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4, T5: -40 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 70°C **For Ex tb** O-Ring Sealing: Silicone -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) -40 ≤ Ta ≤ 70°C T85°C O-Ring Sealing: FKM -20 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) -20 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) -20 ≤ Ta ≤ 70°C T85°C	STM01	AD
CSA and CSAus intrinsic safe Class I, Division1, Groups ABCD T6...T4; Class II, Division 1, Groups EFG; Class III Ex ia IIC T6...T4 Ga Class I, Zone 0, AEx ia IIC T6...T4 Ga	T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 45°C T60°C	STM01	CA
CSA and CSAus Division 2 and Zone 2 intrinsic safe Class I, Division 2, Groups ABCD T6...T4 Ex ic IIC T6...T4 Gc Class 1, Zone 2, AEx ic IIC T6...T4 Gc	T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 45°C T60°C	STM01	CN
CSA and CSAus explosion proof Class I, Division 1, Groups ABCD; Class II, Division 1, Groups EFG; Class III Ex db IIC T6...T4 Gb Class I, Zone 1, AEx db IIC T6...T4 Gb	T4,T5: -20/-40 ≤ Ta ≤ 85°C T100°C T6: -20/-40 ≤ Ta ≤ 70°C T85°C Silicone O-Ring: -40°C ≤ Ta ≤ +85°C FKM O-Ring: -20°C ≤ Ta ≤ +85°C	STM01	CD

Table 8 - Transmitter in Optical Housing, No Sensor Attached (Continued)

Agency Certification, Type Protection, and Area Classification	Application Conditions	Configuration Code	RTT15S Electrical Safety Design Code
FM intrinsic safe Class I, II, III, Division 1, Groups ABCDEFG Class 1, Zone 0, Ex/AEx ia IIC T6…T4 Ga, Zone 20 Ex/AEx ia IIIC T60°C…T100°C Da	T4: -40 ≤ Ta ≤ 85°C T5: -40 ≤ Ta ≤ 60°C T6: -40 ≤ Ta ≤ 40°C **Zone 20 Temperature Class** T4: -40 ≤ Ta ≤ 85°C T100°C T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 40°C T60°C	STM01	FA
FM nonincendive Class I, II, III, Division 2, Groups ABCD Class I, Zone 2, IIC	T4: -20/-40 ≤ Ta ≤ 85°C T6: -20/-40 ≤ Ta ≤ 60°C T60°C Silicone O-Ring: -40 ≤ Ta ≤ +85°C FKM O-Ring: -20 ≤ Ta ≤ +85°C	STM01	FN
FM explosion proof, dust ignition proof Class I, Division 1, Groups ABCD; Class II, Division 1, Groups EFG; Class III Class I, Zone 1, Ex/AEx d IIC T6 Gb	T6: -20/-40 ≤ Ta ≤ 70°C T5, T4: -20/-40 ≤ Ta ≤ 85°C Silicone O-Ring: -40 ≤ Ta ≤ +85°C FKM O-Ring: -20 ≤ Ta ≤ +85°C	STM01	FD
IECEx intrinsic safe Ex ia IIC T6...T4 Ga Ex ia IIIC T60°C ... T100°C Db	T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 45°C T60°C	STM01	EA
IECEx Increased Safety and intrinsic safe for Zone 2 Ex ic IIC T6...T4 Gc Ex ic IIIC T85°C...T100°C Dc Ex ec IIC T6...T4 Gc	**For Ex ec** O-Ring Sealing: Silicone T4: -40 ≤ Ta ≤ 85°C T4 (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T4 (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 60°C T6 O-Ring Sealing: FKM T4: -20 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4: -20 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -20 ≤ Ta ≤ 60°C **For Ex ic** T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 60°C T85°C	STM01	EN
IECEx flameproof Ex db IIC T6...T4 Gb Ex tb IIIC T85°C...T100°C Db	**For Ex db** T4, T5: -40 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4, T5: -40 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 70°C **For Ex tb** O-Ring Sealing: Silicone -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) -40 ≤ Ta ≤ 70°C T85°C O-Ring Sealing: FKM -20 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) -20 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) -20 ≤ Ta ≤ 70°C T85°C	STM01	ED
INMETRO intrinsic safe Ex ia IIC T6...T4 Ga Ex ia IIIC T100°C Da	T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T5: -40 ≤ Ta ≤ 60°C T100°C T6: -40 ≤ Ta ≤ 45°C T100°C	STM01	BA

Table 8 - Transmitter in Optical Housing, No Sensor Attached (Continued)

Agency Certification, Type Protection, and Area Classification	Application Conditions	Configuration Code	RTT15S Electrical Safety Design Code
INMETRO non sparking Ex nA IIC T6...T4 Gc Ex ic IIC T6...T4 Gc Zone 2	**For Ex nA** O-Ring Sealing: Silicone T4: -40 ≤ Ta ≤ 85°C T4 (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T4 (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 60°C T6 O-Ring Sealing: FKM T4: -20 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4: -20 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -20 ≤ Ta ≤ 60°C **For Ex ic** T4: -40 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -40 Ta ≤ 60°C	STM01	BN
INMETRO flameproof Ex d IIC T6...T4 Gb Ex tb IIIC T100°C Db Zone 1, 2, 21, 22	**For Ex d** T4, T5: -40 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4, T5: -40 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 70°C **For Ex tb** O-Ring Sealing: Silicone -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) -40 ≤ Ta ≤ 70°C T100°C O-Ring Sealing: FKM -20 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) -20 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) -20 ≤ Ta ≤ 70°C T100°C	STM01	BD
NEPSI intrinsic safe Ex ia IIC T6...T4 Ga, Ex ia IIIC T100°C Da	T6: -20/-40 ≤ Ta ≤ 70°C T5, T4: -20/-40 ≤ Ta ≤ 85°C Silicone O-Ring: -40 ≤ Ta ≤ +85°C FKM O-Ring: -20 ≤ Ta ≤ +85°C	STM01	NA
NEPSI non sparking Ex nA IIC T6...T4 Gc Ex ic IIC T6...T4 Gc Ex ic IIIC T100°C Dc Zone 2, 22	T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 45°C T60°C	STM01	NN

Table 8 - Transmitter in Optical Housing, No Sensor Attached (Continued)

Agency Certification, Type Protection, and Area Classification	Application Conditions	Configuration Code	RTT15S Electrical Safety Design Code
NEPSI flameproof Ex d IIC T6...T4 Gb Ex tb IIIC T100°C Db Zone 1, 2, 21, 22	**For Ex d** O-Ring Sealing: Silicone T4: -40 ≤ Ta ≤ 85°C T4 (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T4 (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 60°C T6 O-Ring Sealing: FKM T4: -20 ≤ Ta ≤ 85°C (RTT15S-T…1, RTT15S-T…2) T4: -20 ≤ Ta ≤ 80°C (RTT15S-T…3, RTT15S-T…4) T6: -20 ≤ Ta ≤ 60°C T6 **For Ex tb** T4: -40 ≤ Ta ≤ 85°C T100°C (RTT15S-T…1, RTT15S-T…2) T4: -40 ≤ Ta ≤ 80°C T100°C (RTT15S-T…3, RTT15S-T…4) T6: -40 ≤ Ta ≤ 60°C T85°C	STM01	ND
No certification (non-hazardous area)			ZZ

Table 9 - Transmitter in Connection Head as Termination in Sensor/Thermowell Assembly

Agency Certification, Type of Protection, and Area Classification	Application Conditions	Configuration Code
ATEX intrinsic safe II 1 G Ex ia IIC T6...T4 Ga II 1 D Ex ia IIIC T100°C Da	**For Ex ia** 59-RTT15S-F T4: -40 ≤ Ta ≤ 85°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C 60-RTT15S-F T4: -40 ≤ Ta ≤ 80°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C	SEL## SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07
ATEX Ex db (flameproof) II 2 G Ex db IIC T6...T4 Gb II 2 D Ex tb IIIC T100°C Db Zone 1, 2, 21, 22	**Without Union (no XU, RXU)** **For Ex db** With 59-RTT16S-E T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 70°C T6: -20 ≤ Ta ≤ 55°C With 60-RTT16S-E T4: -40 ≤ Ta ≤ 85°C T5: -40 ≤ Ta ≤ 70°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 59-RTT16S-E -20 ≤ Ta ≤ 85°C T100°C -20 ≤ Ta ≤ 70°C T85°C -20 ≤ Ta ≤ 55°C T65°C With 60-RTT16S-E -40 ≤ Ta ≤ 85°C T100°C -40 ≤ Ta ≤ 70°C T80°C -40 ≤ Ta ≤ 55°C T65°C **With Union (fitting XU, RXU)** **For Ex db** With 59-RTT16S-E T4, T5: -20 ? Ta ? 60°C T6: -20 ? Ta ? 55°C With 60-RTT16S-E T4, T5: -40 ≤ Ta ≤ 60°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 59-RTT16S-E -20 ≤ Ta ≤ 60°C T70°C -20 ≤ Ta ≤ 55°C T65°C With 60-RTT16S-E -40 ≤ Ta ≤ 60°C T70°C -40 ≤ Ta ≤ 55°C T65°	SXP## SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07
CSA/CSAus intrinsic safe Class I, Division1, Groups ABCD; Class II, Group EFG; Class III, Division 1. Class I, Zone 0, IIC Ex/AEx ia IIC Ga	59-RTT15S-F T4: -40 ≤ Ta ≤ 85°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C 60-RTT15S-F T4: -40 ≤ Ta ≤ 80°C T100°C T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 40°C T60°C	SEL## SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07

Table 9 - Transmitter in Connection Head as Termination in Sensor/Thermowell Assembly (Continued)

Agency Certification, Type of Protection, and Area Classification	Application Conditions	Configuration Code
CSA/CSAus explosion proof SXP01, SXP02, SXP03, SXP04 Class I, Division 1, Groups ABCD; Class II, Division 1, Groups EFG; Class III SXP05, SXP06 Class I, Division 1, Groups BCD; Class II, Division 1, Groups EFG; Class III	59-RTT15S-C T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 80°C T6: -20 ≤ Ta ≤ 70°C 60-RTT15S-C T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 80°C T6: -20 ≤ Ta ≤ 70°C	SXP01 SXP02 SXP03 SXP04 SXP05 SXP06 SXP07
IECEx intrinsic safe Ex ia IIC T6...T4 Ga, Ex ia IIIC T100°C Da	59-RTT15S-F T4: -40 ≤ Ta ≤ 85°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C 60-RTT15S-F T4: -40 ≤ Ta ≤ 80°C T100°C T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 40°C T60°C	SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07
IECEx Ex db (flameproof) Ex db IIC T6...T4 Gb Ex tb IIIC T100°C Db Zone 1, 2, 21, 22	**Without Union (no XU, RXU)** **For Ex db** With 59-RTT15S-E T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 70°C T6: -20 ≤ Ta ≤ 55°C Wtih 60-RTT15S-E T4: -40 ≤ Ta ≤ 85°C T5: -40 ≤ Ta ≤ 70°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 59-RTT15S-E -20 ≤ Ta ≤ 85°C T100°C -20 ≤ Ta ≤ 70°C T85°C -20 ≤ Ta ≤ 55°C T65°C With 60-RTT15S-E -40 ≤ Ta ≤ 85°C T100°C -40 ≤ Ta ≤ 70°C T80°C -40 ≤ Ta ≤ 55°C T65°C **With Union (fitting XU, RXU)** **For Ex db** With 59-RTT15S-E T4, T5: -20 ≤ Ta ≤ 60°C T6: -20 ≤ Ta ≤ 55°C With 60-RTT15S-E T4, T5: -40 ≤ Ta ≤ 60°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 59-RTT15S-E -20 ≤ Ta ≤ 60°C T70°C -20 ≤ Ta ≤ 55°C T65°C With 60-RTT15S-E -40 ≤ Ta ≤ 60°C T70°C -40 ≤ Ta ≤ 55°C T65°	SXP01 SXP02 SXP03 SXP04 SXP05 SXP06 SXP07

Table 10 - Transmitter in Optical Housing as Termination in Sensor/Thermowell Assembly

Agency Certification, Type of Protection, and Area Classification	Application Conditions	Configuration Code
ATEX intrinsic safe II 1 G Ex ia IIC T6...T4 Ga II 1 D Ex ia IIIC T100°C Da	**For Ex ia** With 53-RTT15S-F T4: -40 ≤ Ta ≤ 85°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C With 54-RTT15S-F T4: -40 ≤ Ta ≤ 80°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C	SEL## SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07
ATEX Ex db (flameproof) II 2 G Ex db IIC T6...T4 Gb II 2 D Ex tb IIIC T100°C Db Zone 1, 2, 21, 22	**Without Union (no XU, RXU)** **For Ex db** With 53-RTT15S-E T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 70°C T6: -20 ≤ Ta ≤ 55°C With 54-RTT15S-E T4: -40 ≤ Ta ≤ 85°C T5: -40 ≤ Ta ≤ 70°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 53-RTT15S-E -20 ≤ Ta ≤ 85°C T100°C -20 ≤ Ta ≤ 70°C T85°C -20 ≤ Ta ≤ 55°C T65°C With 54-RTT15S-E -40 ≤ Ta ≤ 85°C T100°C -40 ≤ Ta ≤ 70°C T80°C -40 ≤ Ta ≤ 55°C T65°C **With Union (fitting XU, RXU)** **For Ex db** With 53-RTT15S-E T4, T5: -20 ≤ Ta ≤ 60°C T6: -20 ≤ Ta ≤ 55°C With 54-RTT15S-E T4, T5: -40 ≤ Ta ≤ 60°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 53-RTT15S-E -20 ≤ Ta ≤ 60°C T70°C -20 ≤ Ta ≤ 55°C T65°C With 54-RTT15S-E -40 ≤ Ta ≤ 60°C T70°C -40 ≤ Ta ≤ 55°C T65°	SXP## SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07
CSA/CSAus intrinsic safe Class I, Division1, Groups ABCD; Class II, Group EFG; Class III, Division 1. Class I, Zone 0, IIC Ex/AEx ia IIC Ga	With 53-RTT15S-F T4: -40 ≤ Ta ≤ 85°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C With 54-RTT15S-F T4: -40 ≤ Ta ≤ 80°C T100°C T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 40°C T60°C	SEL## SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07

Table 10 - Transmitter in Optical Housing as Termination in Sensor/Thermowell Assembly (Continued)

Agency Certification, Type of Protection, and Area Classification	Application Conditions	Configuration Code
CSA/CSAus explosion proof(3) SXP01, SXP02, SXP03, SXP04 Class I, Division 1, Groups ABCD; Class II, Division 1, Groups EFG; Class III SXP05, SXP06 Class I, Division 1, Groups BCD; Class II, Division 1, Groups EFG; Class III	With 53-RTT15S-C T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 80°C T6: -20 ≤ Ta ≤ 70°C With 54-RTT15S-C T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 80°C T6: -20 ≤ Ta ≤ 70°C	SXP01 SXP02 SXP03 SXP04 SXP05 SXP06 SXP07
IECEx intrinsic safe Ex ia IIC T6...T4 Ga, Ex ia IIIC T100°C Da	With 53-RTT15S-F T4: -40 ≤ Ta ≤ 85°C T100°C T5: -40 ≤ Ta ≤ 60°C T70°C T6: -40 ≤ Ta ≤ 40°C T65°C With 54-RTT15S-F T4: -40 ≤ Ta ≤ 80°C T100°C T5: -40 ≤ Ta ≤ 60°C T75°C T6: -40 ≤ Ta ≤ 40°C T60°C	SEL01 SEL02 SEL03 SEL04 SEL05 SEL06 SEL07
IECEx Ex db (flameproof) Ex db IIC T6...T4 Gb Ex tb IIIC T100°C Db Zone 1, 2, 21, 22	**Without Union (no XU, RXU)** **For Ex db** With 53-RTT15S-E T4: -20 ≤ Ta ≤ 85°C T5: -20 ≤ Ta ≤ 70°C T6: -20 ≤ Ta ≤ 55°C With 54-RTT15S-E T4: -40 ≤ Ta ≤ 85°C T5: -40 ≤ Ta ≤ 70°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 53-RTT15S-E -20 ≤ Ta ≤ 85°C T100°C -20 ≤ Ta ≤ 70°C T85°C -20 ≤ Ta ≤ 55°C T65°C With 54-RTT15S-E -40 ≤ Ta ≤ 85°C T100°C -40≤ Ta ≤ 70°C T80°C -40≤ Ta ≤ 55°C T65°C **With Union (fitting XU, RXU)** **For Ex db** With 53-RTT15S-E T4, T5: -20 ≤ Ta ≤ 60°C T6: -20 ≤ Ta ≤ 55°C With 54-RTT15S-E T4, T5: -40 ≤ Ta ≤ 60°C T6: -40 ≤ Ta ≤ 55°C **For Ex tb** With 53-RTT15S-E -20 ≤ Ta ≤ 60°C T70°C -20 ≤ Ta ≤ 55°C T65°C With 54-RTT15S-E -40 ≤ Ta ≤ 60°C T70°C -40 ≤ Ta ≤ 55°C T65°	SXP01 SXP02 SXP03 SXP04 SXP05 SXP06 SXP07

(3) Does not include stainless steel housing options.

Ordering Instructions and Order Codes

The RTT15S can be ordered in the following configurations:

- Transmitter only, with or without housing or display.
- Transmitter in housing, connected to a sensor, and with or without a display, and with or without an attached thermowell

The following table indicates which configuration codes include sensors, thermowells, and transmitters. RTT15S can be ordered as part of any Configuration Code where “Yes” is indicated for transmitters. **Order codes for all configuration codes can be found in the Schneider Electric Temperature Product Configurator at www.se-tempconfig.com.**

Table 11 - Temperature Product Configuration Codes

Code	Description	Sensors	Thermo-wells	Transmit-ters
SGP01	General Purpose Fixed Element RTD Assemblies	Yes	No	Yes
SGP02	General Purpose Fixed Element Thermocouple Assemblies	Yes	No	Yes
SGP03	General Purpose Spring-Loaded RTDs with or without Thermowells	Yes	Yes	Yes
SGP04	General Purpose Spring-Loaded Thermocouples with or without Thermowells	Yes	Yes	Yes
SGP05	Spring-Loaded Replacement Element RTDs	Yes	No	No
SGP06	Spring-Loaded Replacement Element Thermocouples	Yes	No	No
SSP03	GP Heat Tracing RTD/Thermocouple Assemblies	Yes	No	Yes
SXP01	Explosionproof and Flameproof Fixed Element RTD Assemblies	Yes	No	Yes
SXP02	Explosionproof and Flameproof Fixed Element Thermocouple Assemblies	Yes	No	Yes
SXP03	Explosionproof and Flameproof Spring-Loaded RTDs with Thermowells	Yes	Yes	Yes
SXP04	Explosionproof and Flameproof Spring-Loaded Thermocouples with Thermowells	Yes	Yes	Yes
SXP05	Explosionproof and Flameproof Spring-Loaded RTD Assemblies	Yes	No	Yes
SXP06	Explosionproof and Flameproof Spring-Loaded Thermocouple Assemblies	Yes	No	Yes
SXP07	Explosionproof and Flameproof Heat Trading RTD/Thermocouple Assemblies	Yes	No	Yes
STW01	Threaded, Socket Weld, Weld-in Thermowells	No	Yes	No
STW02	Flange Thermowells	No	Yes	No
STM01	Temperature Transmitters	No	No	Yes
SEL01	Intrinsically Safe Fixed Element RTD Assemblies	Yes	No	Yes
SEL02	Intrinsically Safe Fixed Element Thermocouple Assemblies	Yes	No	Yes
SEL03	Intrinsically Safe Spring-Loaded RTDs with Thermowells	Yes	Yes	Yes
SEL04	Intrinsically Safe Spring-Loaded Thermocouples with Thermowells	Yes	Yes	Yes
SEL05	Intrinsically Safe Spring-Loaded RTD Assemblies	Yes	No	Yes
SEL06	Intrinsically Safe Spring-Loaded Thermocouple Assemblies	Yes	No	Yes
SEL07	Intrinsically Safe Heat Trading RTD/Thermocouple Assemblies	Yes	No	Yes

Table 12 - RTT15S Model Code

Code	Description
Model	
RTT15S	RTT15S Temperature Transmitter
Electronics Version	
-T	4 to 20 mA output with HART 5 and 7 digital communication
Input/Output Configuration	
1	Configured for single sensor input
2	Configured for dual sensor input — PV is Sensor 1(4)
3	Configured for dual sensor input — PV is the average of Sensor 1 and Sensor 2(4)
4	Configured for dual sensor input — PV is the difference between Sensor 1 and Sensor 2(4)
Housing and Sensor Mounting	
BB	Basic module for DIN rail or surface mounting, or module replacement(5)(6)
SA	Explosion proof housing with remote sensor(6)
Housing Type	
N	No housing; select with Housing and Sensor Mounting code BB(5)
1	Aluminum, with 1/2 FNPT conduit
2	Aluminum, with M20 internally threaded conduit(7)
3	316 ss, with 1/2 FNPT conduit
4	316 ss, with M20 internally threaded conduit(7)
Input Measurement Type	
B	Thermocouple, Type B
E	Thermocouple, Type E
J	Thermocouple, Type J
K	Thermocouple, Type K
L	Thermocouple, Type L
N	Thermocouple, Type N
R	Thermocouple, Type R
S	Thermocouple, Type S
T	Thermocouple, Type T
U	Thermocouple, Type U
3	Thermocouple, Type W3
5	Thermocouple, Type W5
2	RTD, Platinum, 2-wire, 100 Ω, IEC 751 (ASTM-B Standard Accuracy)
Q	RTD, Platinum, 3-wire, 100 Ω, IEC 751 (ASTM-B Standard Accuracy)(8)
4	RTD, Platinum, 4-wire, 100 Ω, IEC 751 (ASTM-B Standard Accuracy)(8)

(4) Input Measurement Type must be the same for both sensors. Both inputs of a duplex 3- or 4-wire RTD sensor cannot be connected to the RTT15S at the same time. Only Input 1 can be configured for a 3- or 4-wire RTD.
(5) Housing and Sensor Mounting code BB and Housing Type code N must be selected together.
(6) Sensor must be ordered separately.
(7) Only available with Housing and Sensor Mounting “SA” selection.
(8) Not available with Input/Output Configuration 2, 3, or 4.

Table 12 - RTT15S Model Code (Continued)

Code	Description
A	RTD, Platinum, 3-wire, 100 Ω, IEC 751 (ASTM-A High Accuracy)(9)
6	RTD, Platinum, 4-wire, 100 Ω, IEC 751 (ASTM-A High Accuracy)(9)
F	RTD, Nickel, 3-wire, 100 Ω, DIN 43760, 316 ss Sheath(9)
P	Ohm input
M	Millivolt input
Thermowell Assembled to Housing	
NA	No well, or well supplied separately
Electrical Certifications	
AA	ATEX Intrinsic Safe
AN	ATEX Non Sparking(10)
AD	ATEX Flame Proof(10)
BA	INMETRO Intrinsic Safe Ex ia & Ex ic(10)(11)
BN	INMETRO Non Sparking Ex nA(10)(11)
BD	INMETRO Ex d Flame Proof (10)(11)
CA	CSA Intrinsic Safe (CSA and CSAus)
CN	CSA Division 2 and Zone 2 (Nonincendive) (CSA and CSAus)
CD	CSA Explosion Proof (CSA and CSAus)(10)(12)
FA	FM Intrinsic Safe (FM and FMc)
FN	FM Nonincendive (FM and FMc)
FD	FM Explosion Proof, Dust Ignition Proof (FM and FMc)(10)
EA	IECEx Intrinsic Safe
EN	IECEx Non Sparking(10)
ED	IECEx Flame Proof(10)
NA	NEPSI Intrinsic Safe(10)(11)
NN	NEPSI Non Sparking(10)(11)
ND	NEPSI Flame Proof(10)(11)
ZZ	No certification; non-hazardous area(10)
Display Options	
-L1	Integral local display with configurator(10)
-L2	Integral local display only(10)
Housing Options	
-P1	Aluminum, 1/2 NPT conduit plug(13)
-P2	316 ss, 1/2 NPT conduit plug(14)
-P3	Aluminum, M20 conduit plug(15)

(9) Not available with Input/Output Configuration 2, 3, or 4.
(10) Not available with Housing and Sensor Mounting Code BB.
(11) Not available at this time.
(12) Not available with Housing Type 3 or 4.
(13) Only with Housing Type 1.
(14) Only with Housing Type 3.
(15) Only with Housing Type 2.

Table 12 - RTT15S Model Code (Continued)

Code	Description
-P4	316 ss, M20 conduit plug(16)
Temperature Options	
-A4	Silicone o-rings rated to -40°C
Mounting Set Options (select only one)	
-M1	Mounting set, painted carbon steel
-M2	Mounting set, SS
-D1	Includes clip for DIN rail mounting the basic module(17)
Miscellaneous Optional Selections	
-C2	Custom database configuration(18)

(16) Only with Housing Type 4.
(17) Housing and Sensor Mounting Code BB only.
(18) Requires C2 Form (available at website) with all data specified.

TRANSMITTER

Configuration Code STM01
RTT15S Temperature Transmitter

ORDER CODES

Example Order Number:

1	2	3	4	5	6	7	8	9	10
RTT15S	- T	- 1	- SA	- 1	- J	- ZZ	- U	- S(0-100)	F - L1

CODE	DESCRIPTION
RTT15S	Temperature Transmitter with optional Optical Configurator

1 Output

CODE	DESCRIPTION
T	4 to 20 mA with HART Digital Communications

2 Input\Output Configuration

CODE	DESCRIPTION
1	Single Sensor Input
2[1]	Dual Sensor Input -PV is Sensor 1
3[1]	Dual Sensor Input - PV is Average of Sensor 1 and Sensor 2
4[1]	Dual Sensor Input - PV is Difference between Sensor 1 and Sensor 2
[1] Input Measurement Type must be the same for both sensors. Both inputs of a duplex 3- or 4-wire RTD sensor cannot be connected to the RTT15S at the same time. Only Input 1 can be configured for 3- or 4-wire RTD.	

3 Housing and Sensor Mount

CODE	DESCRIPTION
BB	Basic Module for DIN Rail or Surface Mounting or Replacement
SA	Housing without Sensor

4 Housing Type

CODE	DESCRIPTION
N	No Housing; Select with Housing and Sensor Mounting Code BB
1	Aluminum, 1/2" Female NPT Conduit
2	Aluminum, M20 Female Conduit
3[1]	316 SS, 1/2" Female NPT Conduit
4[1]	316 SS, M20 Female Conduit
[1] Must select L1 or L2 with this housing option	

5 Input Measurement Type

CODE	DESCRIPTION	CODE	DESCRIPTION
00	Unconfigured	U	Thermocouple, Type U
B	Thermocouple, Type B	3	Thermocouple, Type W3
E	Thermocouple, Type E	5	Thermocouple, Type W5
J	Thermocouple, Type J	2	2-wire RTD, 100 ohm plat IEC 751
K	Thermocouple, Type K	Q[1]	3-wire RTD, 100 ohm plat IEC 751
T	Thermocouple, Type T	4	4-wire RTD, 100 ohm plat IEC 751
L	Thermocouple, Type L	F	3-wire RTD, 100 ohm nickel DIN 43760
N	Thermocouple, Type N	P	Ohms input
R	Thermocouple, Type R	M	Millivolt input
S	Thermocouple, Type S	[1] ASTM-B Std Accuracy or ASTM-A High Accuracy, based on the accuracy of the sensor used.	

6 Hazardous Area Certifications

CODE	DESCRIPTION
ZZ	No Certification (Non-Hazardous Area)
CA	CSA IS, I/1/ABCD & Ex ia Zones (CSA & CSAus)
CN	CSA NI I/2/ABCD
CD	CSA Explosion proof, & Ex d Zones(CSA & CSAus)
AA	ATEX Intrinsic Safe Ex ia & Ex ic
AN	ATEX Non Sparking Ex nA
AD	ATEX Ex d (Flameproof)
EA	IECEx Intrinsic Safe Ex ia & Ex ic
EN	IECEx Non Sparking Ex nA
ED	IECEx Ex d (Flameproof)

7 Failure Mode

CODE	DESCRIPTION
U	Upscale Burnout ≥ 23 mA
D	Downscale Burnout ≤ 3.5 mA

8 Range

CODE	DESCRIPTION
S	(Lower limit - Upper limit)

9 Unit of Measure

CODE	DESCRIPTION
C	Celsius
F	Fahrenheit

10 Optional Selections

CODE	DESCRIPTION
L1	Integral Display/Optical Configurator
L2	Integral Display only
P1	Aluminum, 1/2" NPT Conduit Plug
P2	316SS, 1/2" NPT Conduit Plug
P3	Aluminum, M20 NPT Conduit Plug
P4	316SS, M20 Conduit Plug
A4	Silicone O-Rings, -40 ºC Temp Rated
M1	Mounting Set Painted Steel
M2	Mounting Set 316SS
D1	Din Rail Mounting Clip for Basic Module

Nominal Dimensions

For dimensional information specific to your sales order, contact your sales representative to order a Certified Dimensional Print (CDP).

All dimensions in diagrams are shown in millimeters over inches ($\frac{mm}{in}$).

Figure 7 - Transmitter with Display Housing — Front View

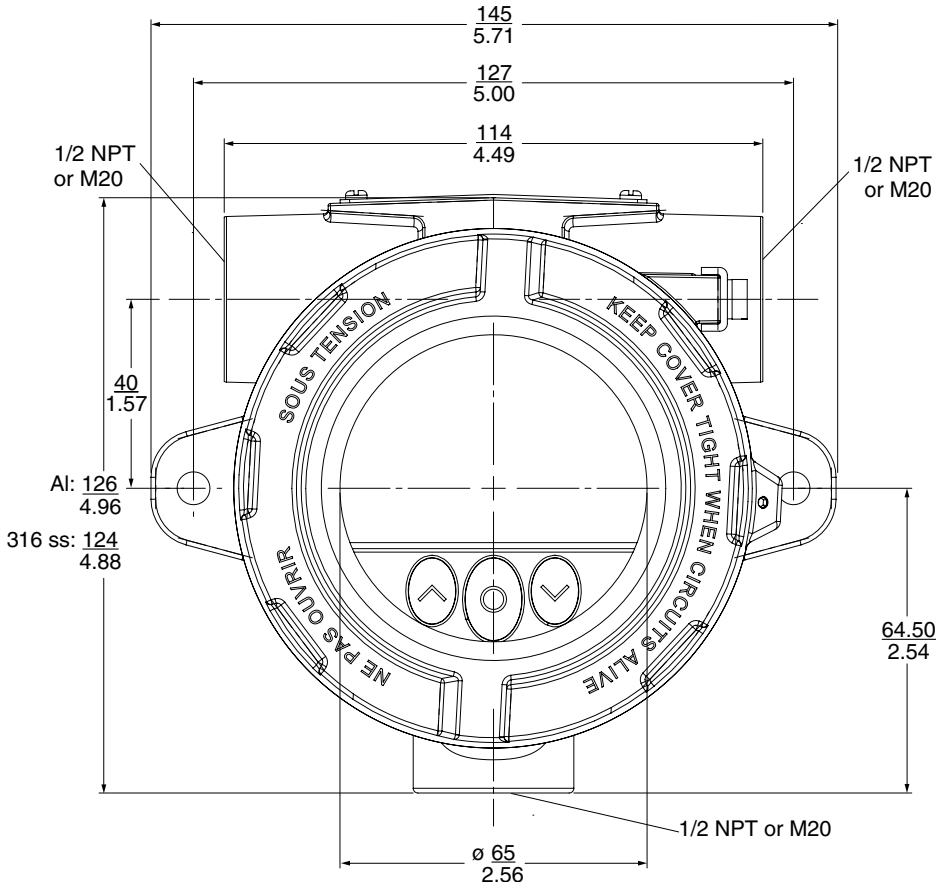


Figure 8 - Transmitter with Display Housing — Side View

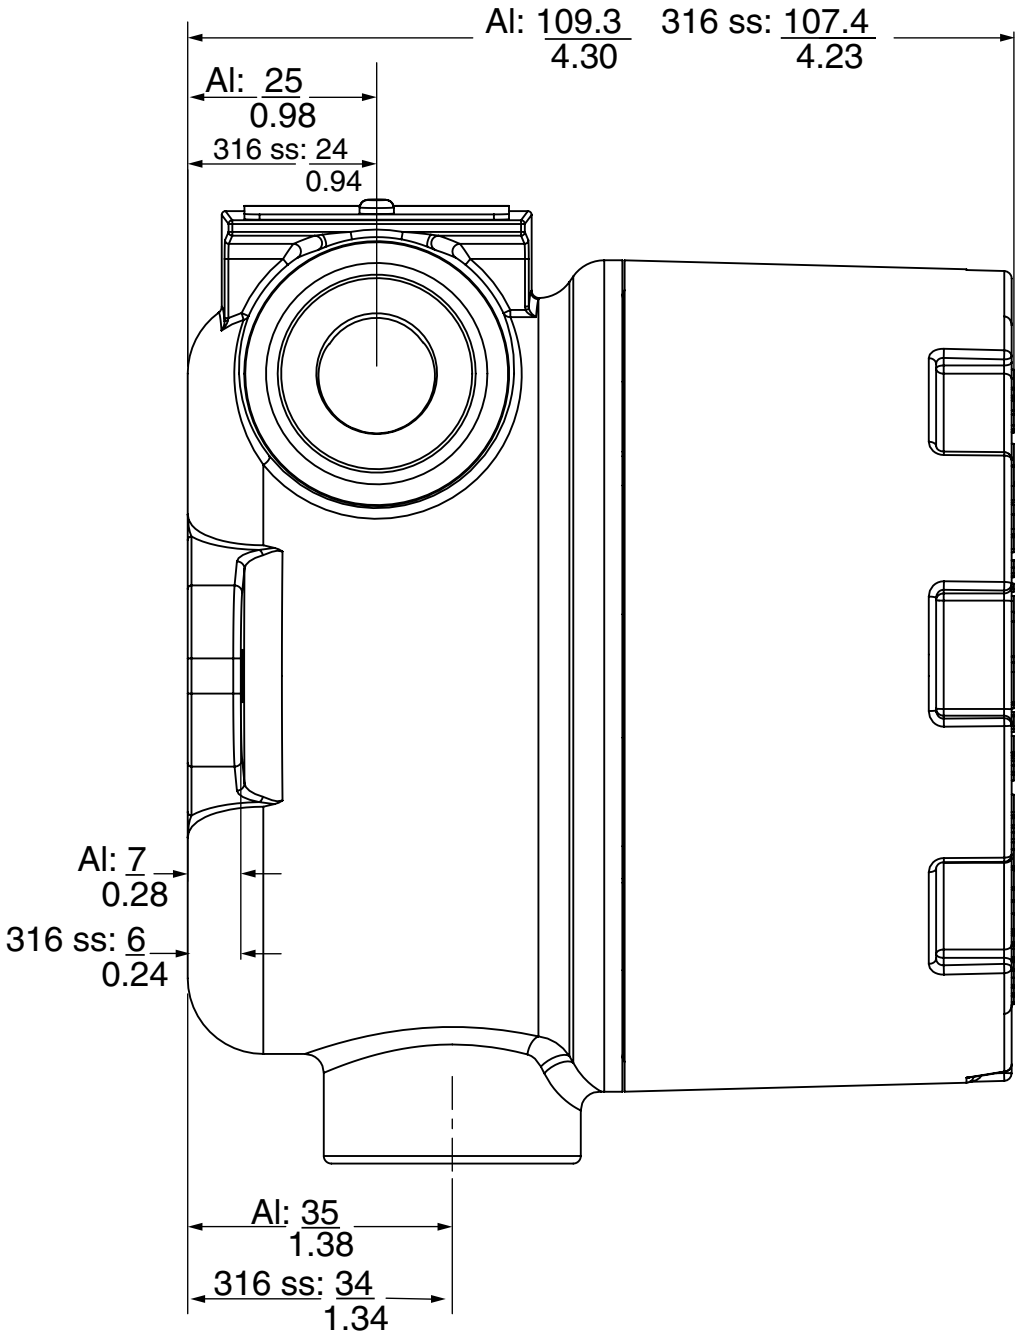


Figure 9 - Transmitter with Display Housing — Wall Mount — Top View

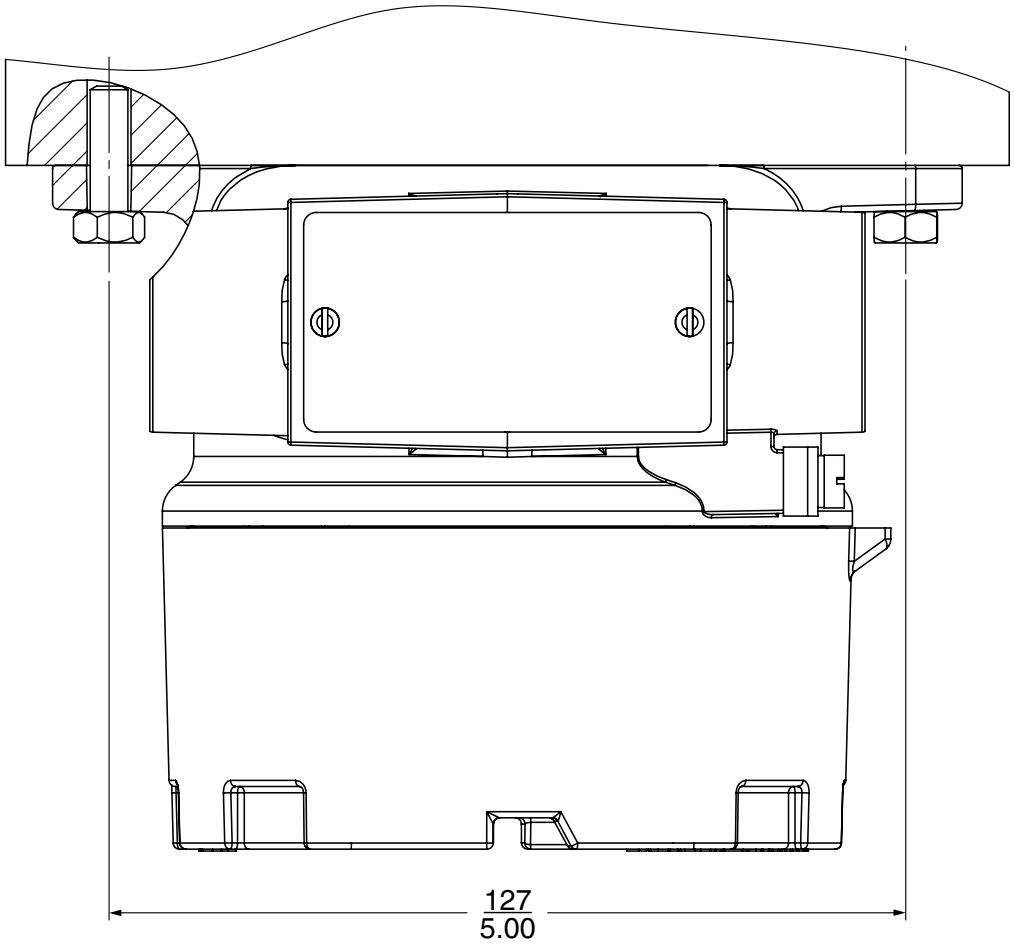


Figure 10 - Transmitter with Display Housing — Pipe Mount — Side View

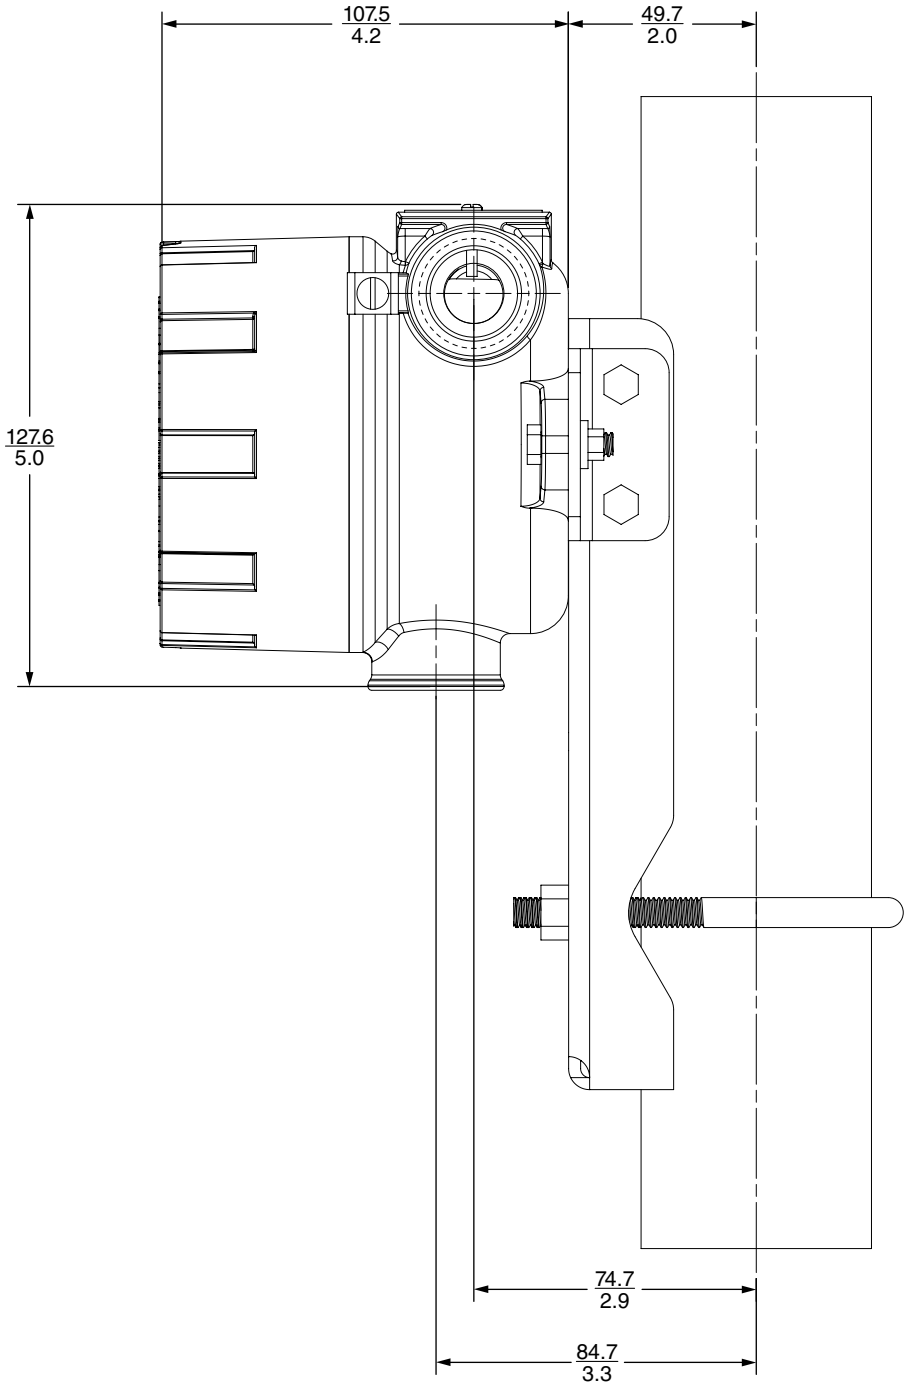


Figure 11 - Basic Transmitter — No Housing

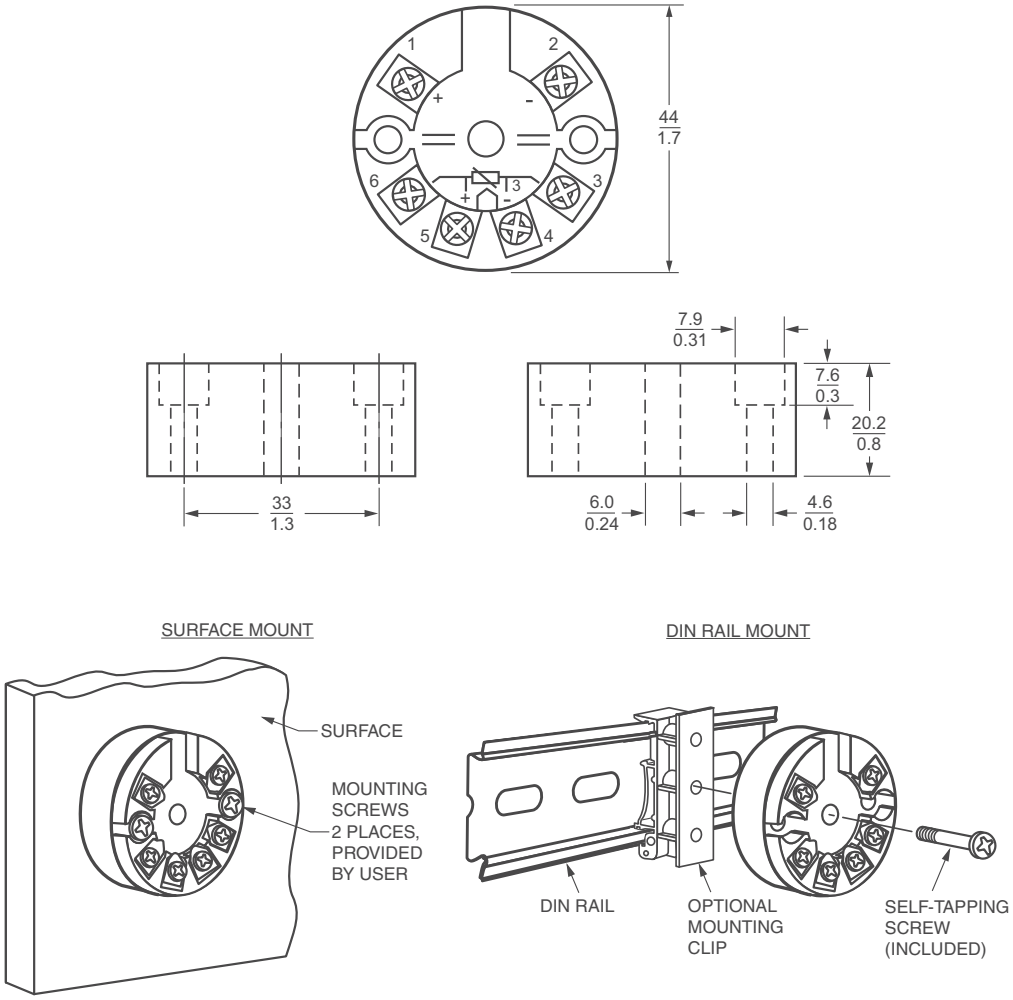


Figure 12 - Connection Head Housing — 31 and 91 Series

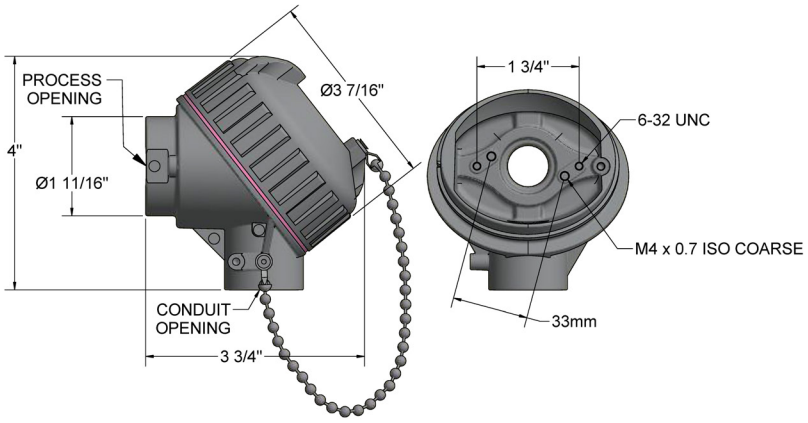


Figure 13 - Connection Head Housing — 93 Series


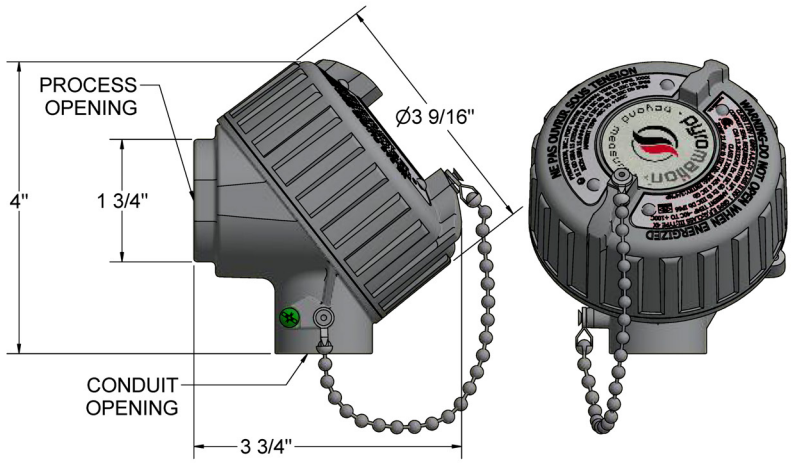


Figure 14 - Connection Head Housing — 94 Series

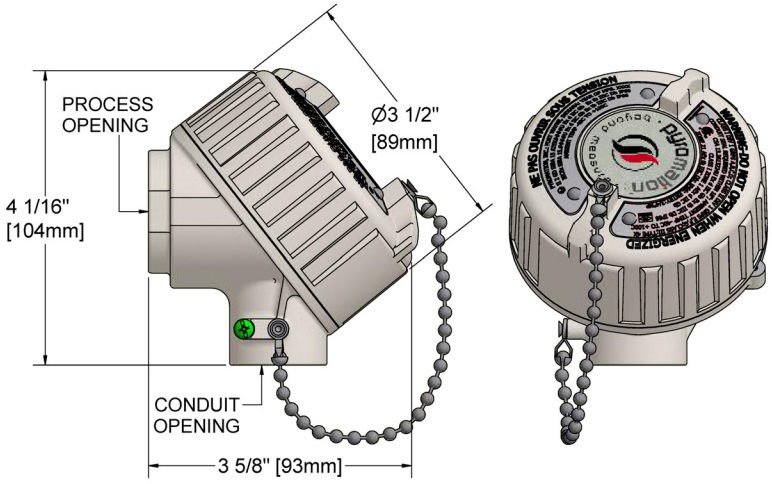

Related Documents

- *RTT15S Temperature Transmitter with Optional Optical Configurator User Guide* (MI 020-523)
- *RTT15S Temperature Transmitter Safety Information* (MI 020-524)

Proposition 65

WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Schneider Electric Systems USA, Inc.
70 Mechanic Street
Foxboro, Massachusetts 02035-2040
United States of America

https://www.se.com
Global Customer Support: https://pasupport.se.com

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2016 – 2025 Schneider Electric. All rights reserved.

PSS 2A-1F5 B, Rev E