Product Environmental Profile

56 SERIES PRO TWO GANG INDUSTRIAL BOX



General information

Reference product	2G INDUSTRIAL BOX (198x102x63mm) Conduit entries 1x25mm & 1x32mm, 56 Series PRO - PDLP56E2GY
Description of the product	A mounting box is an electrical enclosure installed in a building that provides a secure housing and support for electrical devices such as switches, socket outlets, or other wiring accessories, while protecting and organizing the electrical connections inside.
Description of the range	Single product
Functional unit	Protect people from direct contact with live active parts and ensure the grouping of control, command and protection devices in a single enclosure having the following dimensions H x L x D while protecting them against the penetration of solid objects and liquids (IP), according to the appropriate use scenario, and for the reference service life of the product of 20 years.
Specifications are:	H = 190 (mm) L = 102 (mm) P = 63 (mm) IP = IP66, Degree of protection against ingress of solid foreign objects and water with harmful effects in accordance with the standard IEC 60529.

Constituent materials

Reference product mass	499.01 g	Including the product and its packaging.

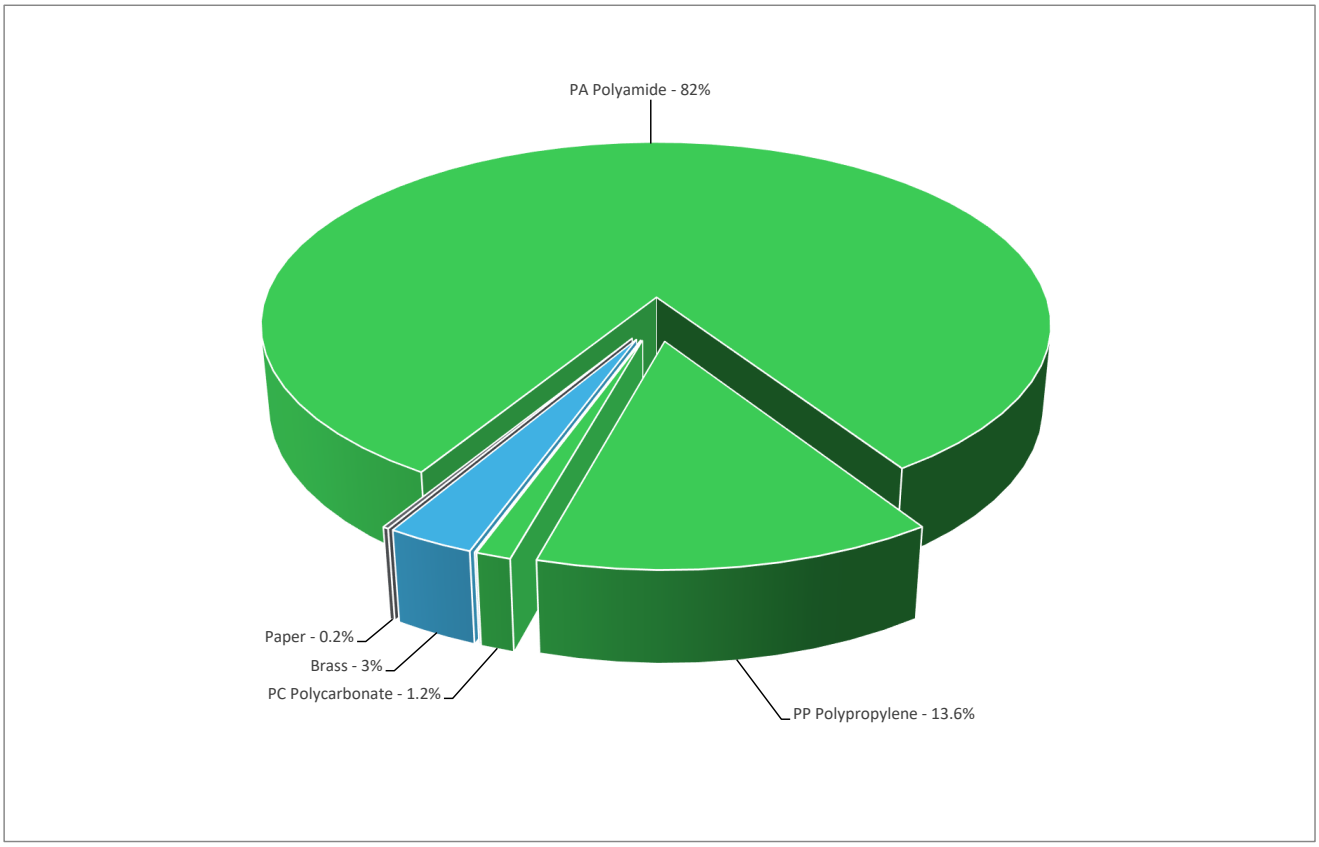

Plastics	96.8%
Metals	3.0%
Others	0.2%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website
https://www.se.com

Additional environmental information

End Of Life	Recyclability potential:	**3%**	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

Reference service life time	20 years
Product category	Unequipped enclosures
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption
Installation elements	This product does not require a special installation procedure and requires little to no energy to install. The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal). The material constituents of the packaging are cardboard (99%), plastic (< 0%), and paper (1%)
Use scenario	There is no use scenario to be considered
Time representativeness	The collected data are representative of the year 2025
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are similar and representative of the actual type of technologies used to make the product.

Geographical representativeness	**Final assembly site**	**Use phase**		**End-of-life**
	China	New Zealand		New Zealand
Energy model used	**[A1 - A3]**	**[A5]**	**[B6]**	**[C1 - C4]**
	Electricity mix; low voltage;China, CN Electricity mix; low voltage;RER	Electricity mix; low voltage;RER	Electricity mix; low voltage;2022;New Zealand, NZ	Global, European and French datasets are used.

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators		**56 SERIES PRO TWO GANG INDUSTRIAL BOX - PDLP56E2GY**						
Impact indicators	**Unit**	**Total (without Module D)**	**[A1 - A3] - Manufacturing**	**[A4] - Distribution**	**[A5] - Installation**	**[B1 - B7] - Use**	**[C1 - C4] - End of life**	**[D] - Benefits and loads**
Contribution to climate change	kg CO2 eq	2.61E+00	2.04E+00	7.11E-02	1.97E-01	0.00E+00	3.03E-01	0.00E+00
Contribution to climate change-fossil	kg CO2 eq	2.54E+00	2.13E+00	7.11E-02	3.59E-02	0.00E+00	3.02E-01	0.00E+00
Contribution to climate change-biogenic	kg CO2 eq	7.65E-02	-8.62E-02	0*	1.62E-01	0.00E+00	1.19E-03	0.00E+00
Contribution to climate change-land use and land use change	kg CO2 eq	7.70E-06	7.21E-06	1.07E-07	6.81E-09	0.00E+00	3.79E-07	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	6.02E-08	4.58E-08	8.62E-10	1.31E-09	0.00E+00	1.23E-08	0.00E+00
Contribution to acidification	mol H+ eq	1.29E-02	1.11E-02	1.13E-04	2.08E-04	0.00E+00	1.49E-03	0.00E+00
Contribution to eutrophication, freshwater	kg P eq	4.31E-05	4.16E-05	2.66E-07	5.67E-08	0.00E+00	1.14E-06	0.00E+00
Contribution to eutrophication, marine	kg N eq	2.21E-03	1.81E-03	2.09E-05	4.96E-05	0.00E+00	3.26E-04	0.00E+00
Contribution to eutrophication, terrestrial	mol N eq	2.38E-02	1.87E-02	2.29E-04	6.61E-04	0.00E+00	4.22E-03	0.00E+00
Contribution to photochemical ozone formation - human health	kg COVNM eq	7.21E-03	6.04E-03	7.35E-05	1.40E-04	0.00E+00	9.60E-04	0.00E+00
Contribution to resource use, minerals and metals	kg Sb eq	1.92E-05	1.90E-05	2.54E-08	6.66E-09	0.00E+00	1.21E-07	0.00E+00
Contribution to resource use, fossils	MJ	5.09E+01	4.16E+01	1.27E+00	7.04E-01	0.00E+00	7.30E+00	0.00E+00
Contribution to water use	m3 eq	5.69E-01	5.41E-01	2.56E-03	2.17E-03	0.00E+00	2.28E-02	0.00E+00

Inventory flows Indicators		56 SERIES PRO TWO GANG INDUSTRIAL BOX - PDLP56E2GY						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	1.89E+00	1.58E+00	3.98E-03	5.61E-02	0.00E+00	2.57E-01	0.00E+00
Contribution to renewable primary energy used as raw material	MJ	1.36E-02	1.36E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to total renewable primary energy	MJ	1.91E+00	1.59E+00	3.98E-03	5.61E-02	0.00E+00	2.57E-01	0.00E+00
Contribution to non renewable primary energy used as energy	MJ	4.36E+01	3.44E+01	1.27E+00	7.04E-01	0.00E+00	7.30E+00	0.00E+00
Contribution to non renewable primary energy used as raw material	MJ	7.27E+00	7.27E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to total non renewable primary energy	MJ	5.09E+01	4.16E+01	1.27E+00	7.04E-01	0.00E+00	7.30E+00	0.00E+00
Contribution to use of secondary material	kg	2.26E-01	2.26E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to net use of fresh water	m³	1.33E-02	1.27E-02	5.96E-05	4.97E-05	0.00E+00	5.48E-04	0.00E+00
Contribution to hazardous waste disposed	kg	1.58E+00	1.37E+00	2.97E-04	3.82E-02	0.00E+00	1.70E-01	0.00E+00
Contribution to non hazardous waste disposed	kg	2.98E-01	2.28E-01	6.59E-03	4.97E-03	0.00E+00	5.82E-02	0.00E+00
Contribution to radioactive waste disposed	kg	7.21E-05	3.75E-05	5.22E-06	2.21E-06	0.00E+00	2.72E-05	0.00E+00
Contribution to components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to materials for recycling	kg	1.18E-02	2.20E-04	0.00E+00	0.00E+00	0.00E+00	1.16E-02	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product	kg of C	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg of C	2.84E-04

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators		56 SERIES PRO TWO GANG INDUSTRIAL BOX - PDLP56E2GY							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to climate change-fossil	kg CO2 eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to climate change-biogenic	kg CO2 eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to climate change-land use and land use change	kg CO2 eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to ozone depletion	kg CFC-11 eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to acidification	mol H+ eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to eutrophication, freshwater	kg P eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to eutrophication marine	kg N eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to eutrophication, terrestrial	mol N eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to photochemical ozone formation - human health	kg COVNM eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to resource use, minerals and metals	kg Sb eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to resource use, fossils	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to water use	m3 eq	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0

Inventory flows Indicators		56 SERIES PRO TWO GANG INDUSTRIAL BOX - PDLP56E2GY							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of renewable primary energy resources used as raw material	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to total use of renewable primary energy resources	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of non renewable primary energy resources used as raw material	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to total use of non-renewable primary energy resources	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of secondary material	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to net use of freshwater	m^3	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to hazardous waste disposed	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to non hazardous waste disposed	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to radioactive waste disposed	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to components for reuse	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to materials for recycling	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to materials for energy recovery	kg	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0
Contribution to exported energy	MJ	0.00E+00	0	0.00E+00	0	0	0	0.00E+00	0

** represents less than 0.01% of the total life cycle of the reference flow*

Life cycle assessment performed with EIME version V6.3.4, database version 2026-04 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2606031EN	*Drafting rules*	PEP-PCR-ed4-2021 09 06
Validity period	5 years	*Supplemented by*	PSR-0005-ed3.1-EN-2023 12 08
Date of issue	06-2026	*Information and reference documents*	www.pep-ecopassport.org

Independent verification of the declaration and data, in compliance with ISO 14021 : 2016

Internal X External

The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)

PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022

The components of the present PEP may not be compared with components from any other program.

Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact

Head Office

35, rue Joseph Monier

CS 30323

F- 92500 Rueil

RCS Nanterre 954 503 439
Capital social 928 298 512 €

©2024 - Schneider Electric – All rights reserved