CARACTÉRISTIQUES TECHNIQUES / Technical data

VLVAF2P03506AB

TENSION ASSIGNEE / rated voltage (Un):	400	V
PUISSANCE ASSIGNEE / rated power (Qn):	50	Kvar
COURANT ASSIGNÉ / rated current (In):	72	A
COURANT MAXIMUM PERMANENT / maximum continuous current (Imp):	86	A
FRÉQUENCE ASSIGNÉE / rated frequency (Fn):	50	Hz
ISOLEMENT / insulation (Um):	690	V
PERTES CALCULÉES / calculated losses:	300	W
ACCORD / tuning:	190	Hz
COURANT ASSIGNE DE COURT-CIRCUIT CONDITIONNEL / rated conditional short-circuit current (Icc):	-	kA
COURANT ASSIGNE DE COURTE DUREE ADMISSIBLE / rated short-time withstand current (Icw):	35	kA/1s
UTILISATION INTÉRIEURE / indoor type:	IP31	
NORME / standard:	IEC 61439-1 : 2011 IEC 61439-2 : 2011 IEC 61921 : 2017	
TEMPERATURE / temperature:	-5° / +45°C	°C
MOYENNE SUR 24 HEURE / average temperature over 24 hours :	35°C	°C
MOYENNE ANNUELLE / average annual temperature :	25°C	°C

SCHEMA ELECTRIQUE DE PUISSANCE / Power diagram :	PF2PA3S(DS)WOCBSPF
SCHEMA ELECTRIQUE DE CONTROLE / Control diagram :	CF2PA3S(DS)WOCB
PLANS D'ARCHITECTURE, D'IMPLANTATION & D'INSTALLATION / General Arrangement, Layout & Installation drawings :	EF2PA2M3SBWOCBPF
BORNIER CLIENT / Customer Terminal Blocks :	S1B9989700

Schneider Electric

VarSet capacitor bank Auto 050kvar DR3,8 xxB 400V 50Hz

Number:	Revision:	Sheet:
VLVAF2P03506AB	00	1/2

Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

NOMENCLATURE / Bill of material

Item	Description	Part N°
QS01	Gamme / range – Ref Disjoncteur / Ref Breaker	- - -
	Réglage / Setting	-
	Bobine MX - Auxiliary MX	-

MODULES						
	n=1	**n=2**	**n=3**	**n=4**	**n=5**	**n=6**
Power (kVar)	12.5 + 12.5	25	-	-	-	-
QS_n	Fuses 80A	Fuses 80A				
KM_n	LC1D38P7 x 2	LC1D38P7				
C_n	BLRCH170A204B48 x 2	BLRCH339A407B48				
DR_n	LVR7125A40T x 2	LVR7250A40T				
	n=7	**n=8**	**n=9**	**n=10**	**n=11**	**n=12**
Power (kVar)	-	-	-	-	-	-
QS_n						
KM_n						
C_n						
DR_n						

Item	Description	Part N°
QF1	Fuses or CB	DF2CA04
QF2	Unipolar and neutral breaker	A9F74602
TC1	Transformer	ABL6TS40U
ST1	Thermostat (ventilation)	
ST2	Thermostat (overheating)	NSYCCOTHO
EV1	Fan	PHA25987
EV2	Fan	
A1	PFC controller	VPL06N

(La liste et les références des composants figurant ci-après sont données à titre indicatif compte tenu de leur caractère évolutif du fait des éventuelles modifications de design ou évolutions des normes de référence / As product design and standards of reference change from time to time, the following list of part and corresponding reference are for information only)


Schneider Electric


VarSet capacitor bank Auto 050kvar DR3,8 xxB 400V 50Hz


Number:	Revision:	Sheet:
VLVAF2P03506AB	00	2/2


Cette information est hautement confidentielle et elle est la propriété exclusive de Schneider Electric. Ce document ne doit pas être utilisé à d'autres fins que celles expressément permises par écrit par les propriétaires et ne doit pas être divulgué ou reproduit de quelque manière que ce soit sans la permission écrite des propriétaires


The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This document must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing.

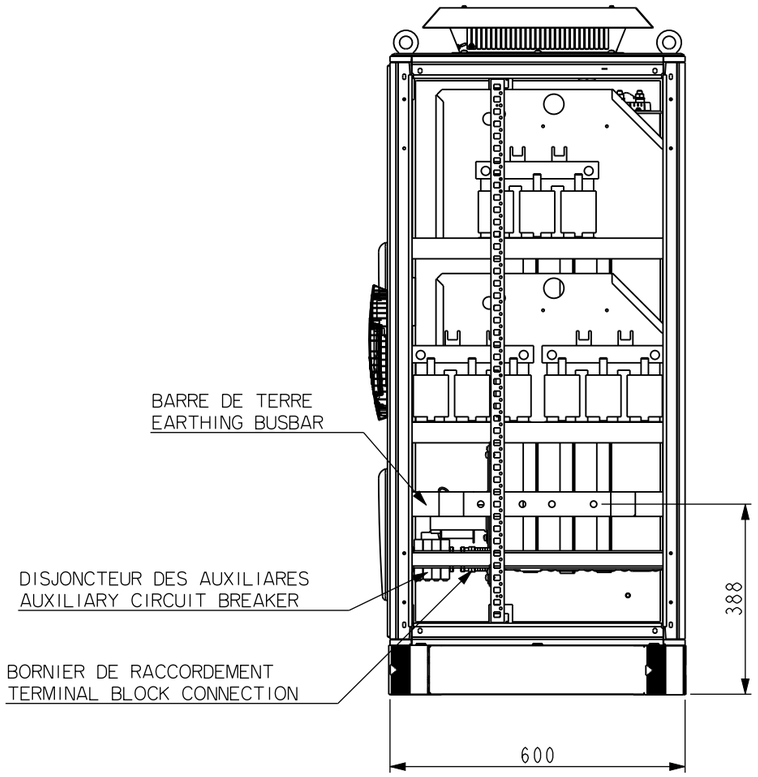

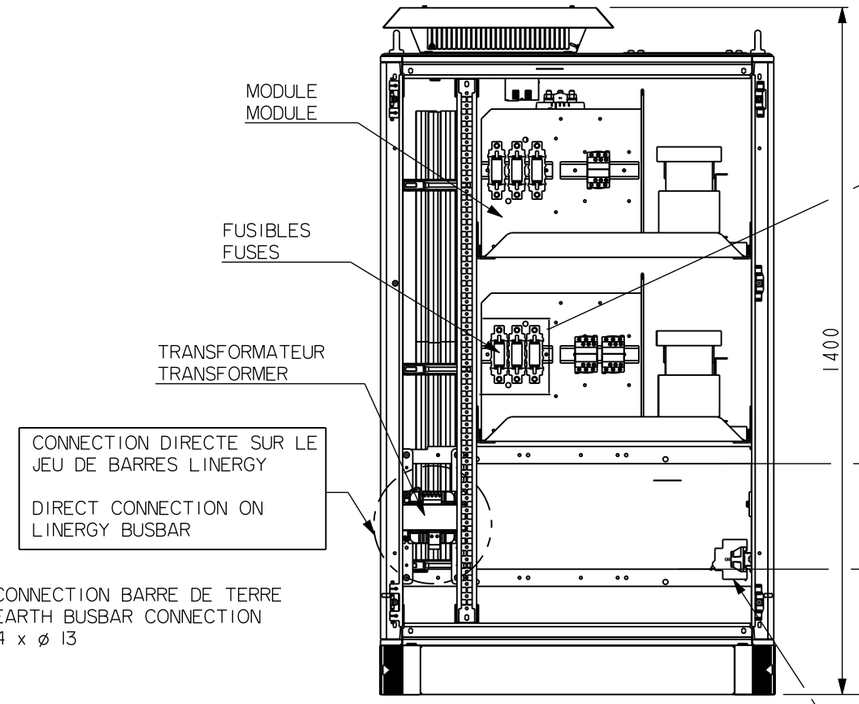


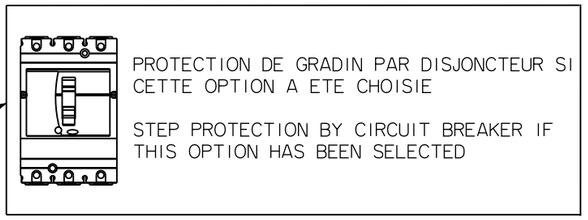

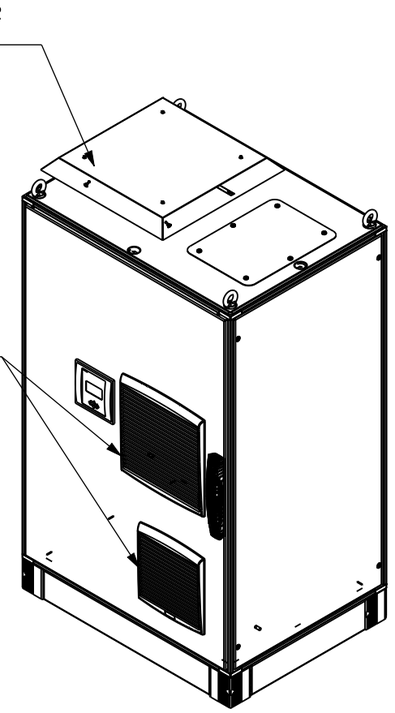



GENIE CIVIL / CIVIL ENGINEERING

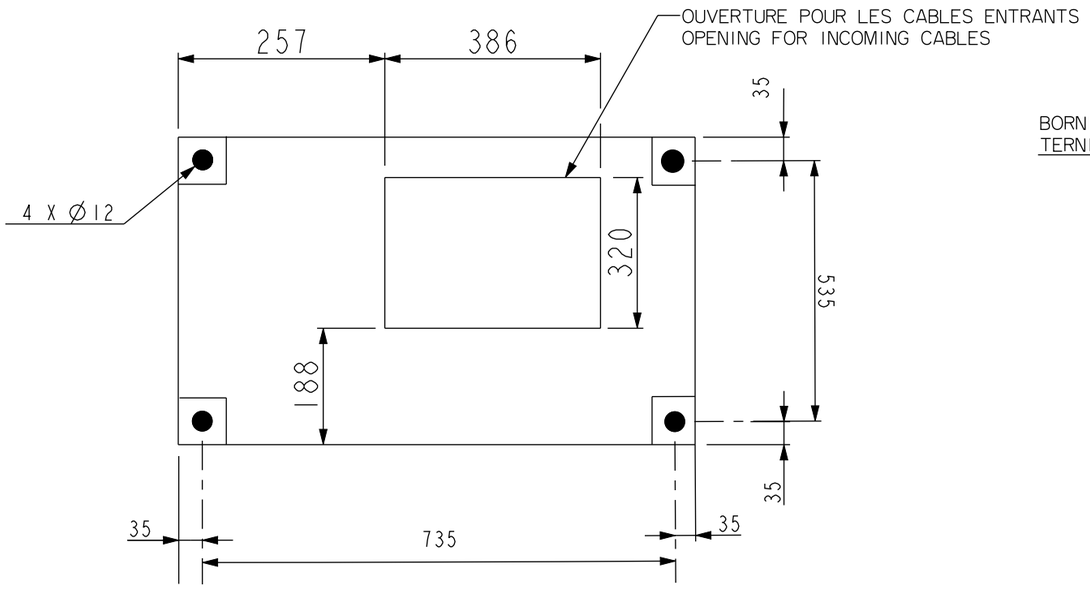


Approximate weight:350kg

Scale: 0.04	Technical Specification:	Units of measure : mm
Schneider Electric	Document Description: DIMENSIONS GENIE CIVIL / CIVIL ENGINEERING DIMENSIONS	
	Document Number: EF2PA2M3SBWOCBPF	Doc. Rev. 00 / Sheet: 1/1
	State:	

The information is highly confidential and is the exclusive property of Schneider Electric copyright reserved. This drawing must not be used for any purpose other than that expressly permitted in writing by the owners and must not be disclosed or reproduced in any way without permission from the owners in writing. This drawing must be returned to the owners when the purpose has ceased.


Original format A3

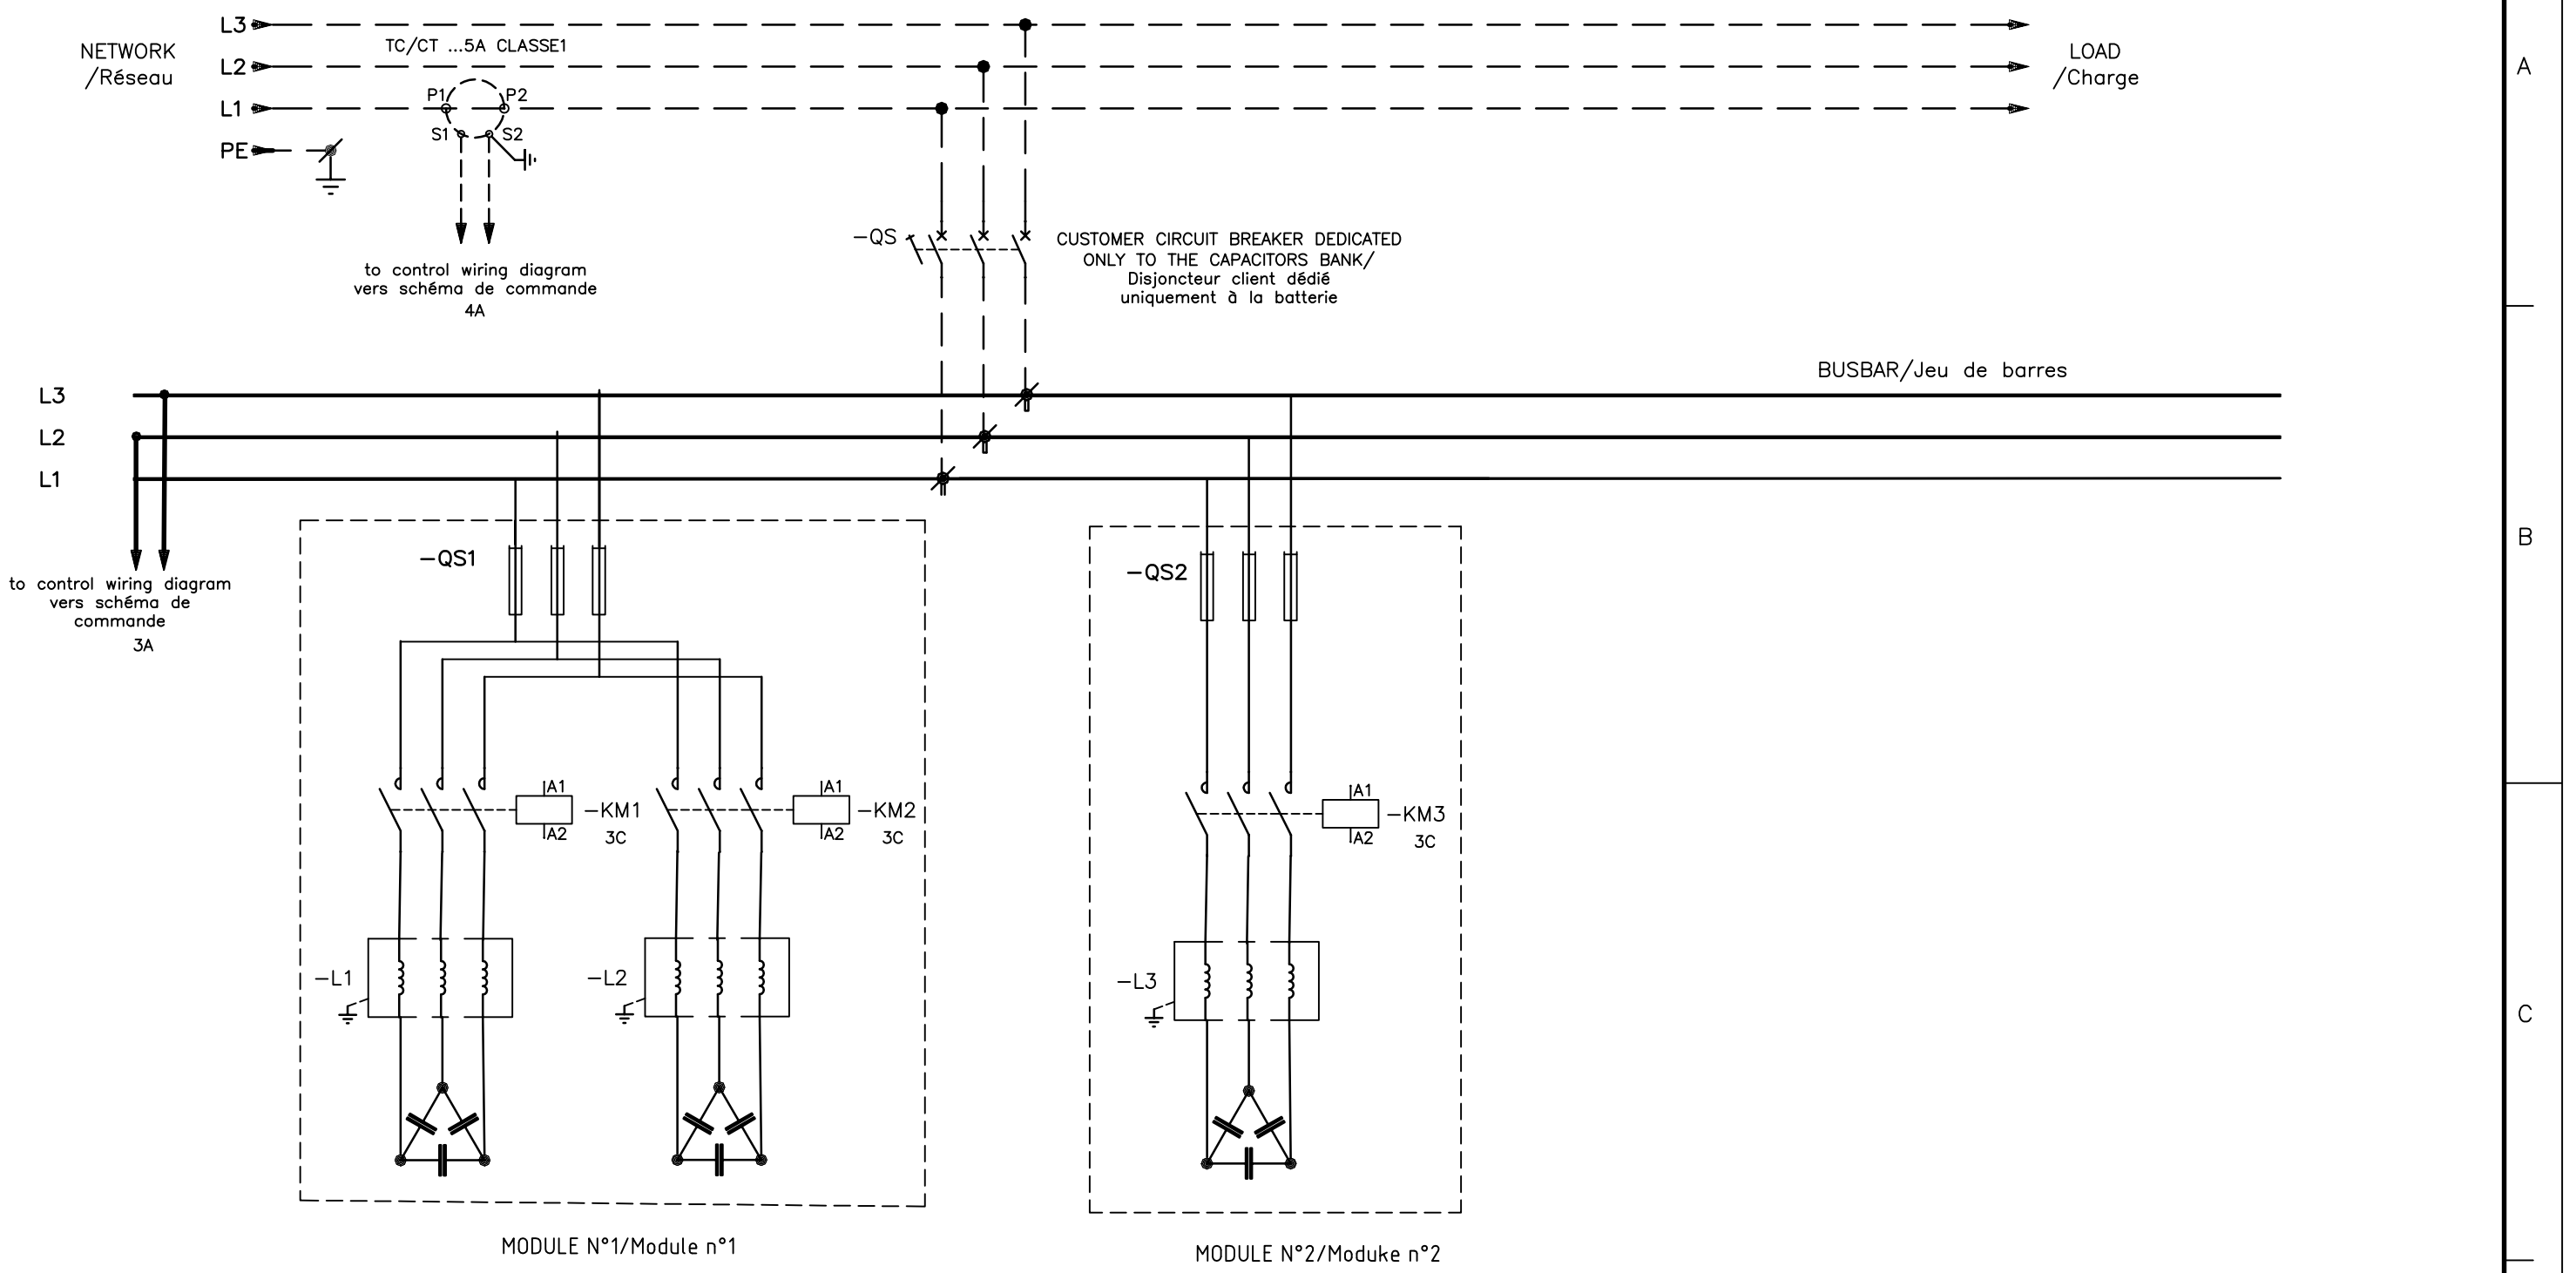


Connection not supply/Connexion non fournie

	Scale:	Tolerancing Standard :	Units of measure :
Schneider Electric	F2P auto P wiring diag W/O CB 3 steps		
	Number: PF2PA3S(DS)WOCBSPF	Revision: 00	Sheet: 1 / 1
All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent	State:		

Original AutoCAD format A3

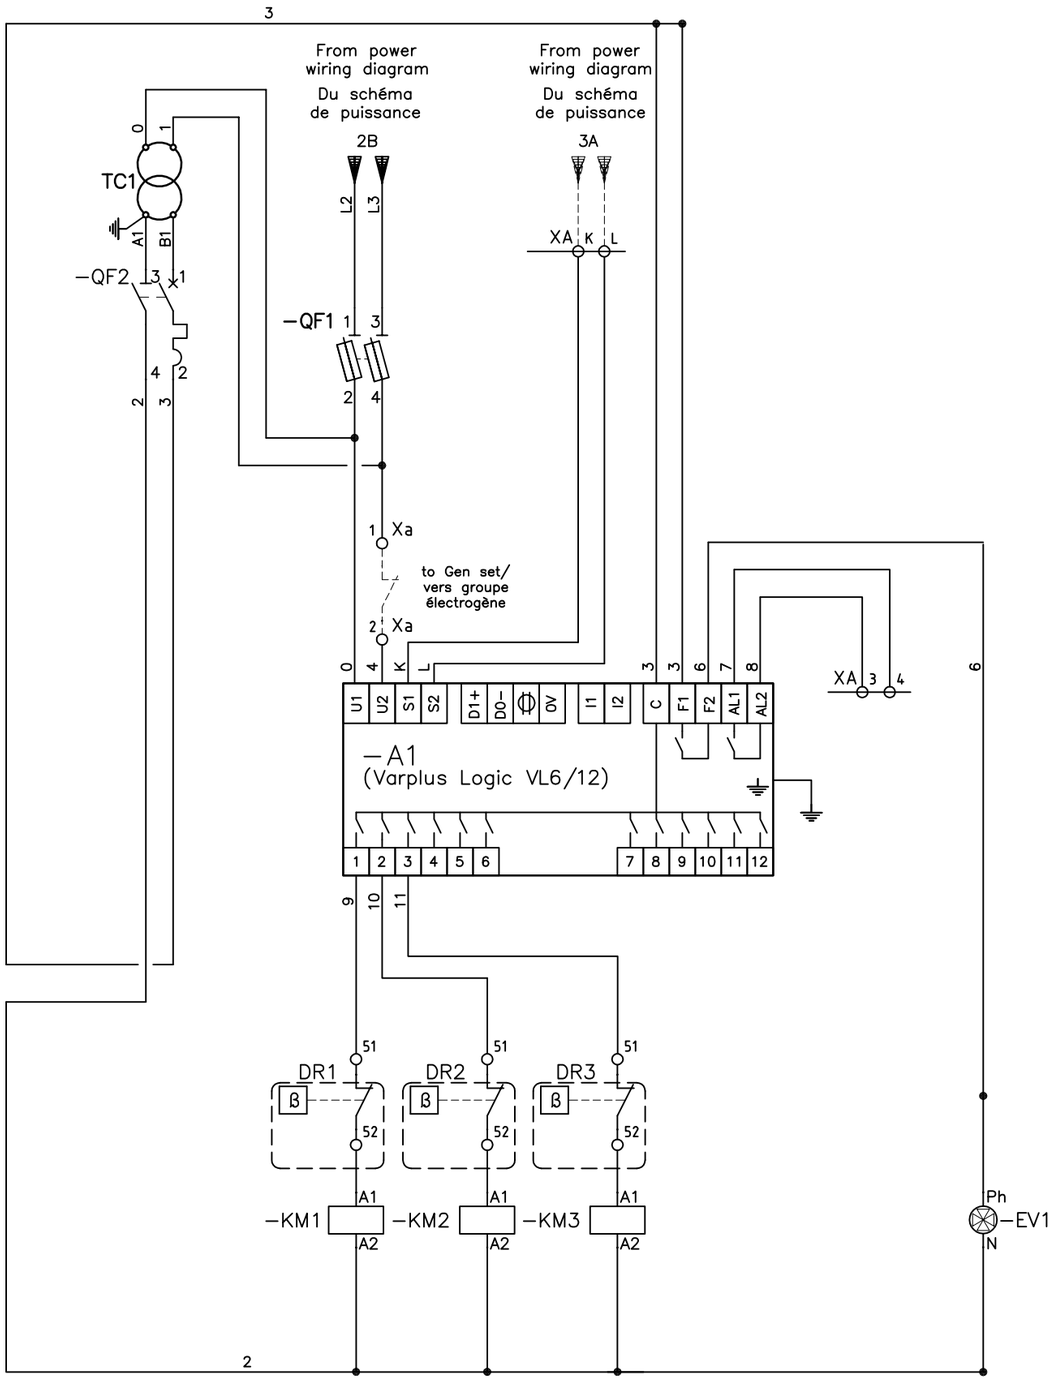

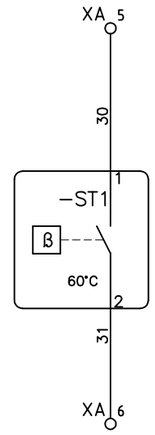

Alarm temperature information
Must be imperatively used/
Information alarme température
Doit être impérativement exploitée

------- Connection not supply/Connexion non fournie

Scale:	Tolerancing Standard :	Units of measure :

F2P CONTROL WIRING DIAGRAM - 3 STEPS - WITHOUT CB

NETWORK : 400V-415V/50Hz & 400V/60Hz

Number:	Revision:	Sheet:
CF2PA3S(DS)WOCB	**00**	1 / 1


All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent

State:

Original AutoCAD format A3

CUSTOMER TERMINAL BLOCK
Bornier client
Клеммный блок для внешних присоединений

VLVAW1N/VLVAW2N/VLVAW3N
/VLVAF5N/VLVAF6P
VLVAF2P/VLVAF3P/VLVAF5P

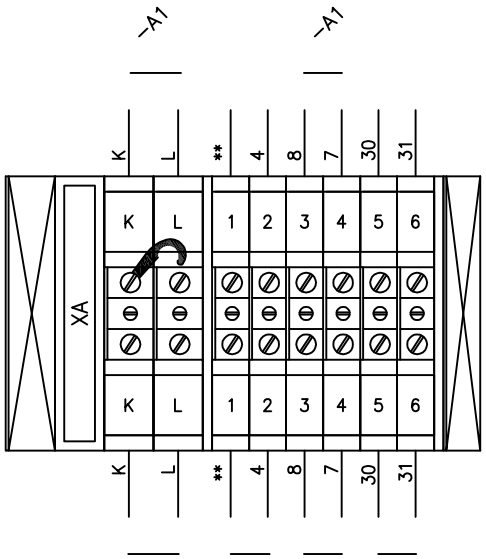

PFC current measure/Mesure courant régulateur/
Измерение тока
Gen set/Groupe électrogène
Генераторная установка
PFC alarm/Alarme régulateur
Сигнализации
Alarm temperature information/Information alarme température
Сигнализация по температурному режиму

**
= 1 for VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P/
= 1 для контроллеров VL6 VLVAW1N-VLVAW2N-VLVAW3N-VLVAF4P

= 1 for VL12 VLVAF5N-VLVAF6P /
= 1 для контроллеров VL12 VLVAF5N-VLVAF6P

Scale:	Tolerancing Standard :	Units of measure :
Schneider Electric	CUSTOMER TERMINAL BLOCKS *BORNIER CLIENT*	
	Number: **S1B9989700**	Revision: **06** / Sheet: 1 / 1

All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent

State:

Original AutoCAD format A3